

(11) **EP 0 836 189 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**18.08.1999 Bulletin 1999/33**

(51) Int Cl.<sup>6</sup>: **G11B 27/00, G11B 20/12,  
H04N 5/85**

(21) Application number: **97916640.2**

(86) International application number:  
**PCT/JP97/01225**

(22) Date of filing: **10.04.1997**

(87) International publication number:  
**WO 97/39451 (23.10.1997 Gazette 1997/45)**

(54) **MULTIMEDIUM OPTICAL DISK STORING IMAGE TITLES IN SUCH A MANNER THAT WHETHER THEY NEED AV FUNCTIONS FOR REPRODUCTION CAN BE INSTANTLY JUDGED, AND APPARATUS FOR AND METHOD OF REPRODUCING THE SAME**

**BILDTITEL IN EINER SOLCHEN WEISE ABSPEICHERNDE OPTISCHE MULTIMEDIA-PLATTE, DASS DIE NOTWENDIGKEIT VON AV-FUNKTIONEN ZUR WIEDERGABE SOFORT ERMITTELT WERDEN KANN SOWIE WIEDERGABEGERÄT UND -VERFAHREN DAZU**

**DISQUE OPTIQUE MULTIMEDIA CONTENANT DES TITRES D'IMAGES DE SORTE QU'IL SOIT POSSIBLE DE DETERMINER INSTANTANEMENT SI DES FONCTIONS AV SONT NECESSAIRES POUR LEUR REPRODUCTION, APPAREIL ET PROCEDE POUR REPRODUIRE CEUX-CI**

(84) Designated Contracting States:  
**DE FR GB**

• **MURASE, Kaoru, Room 105  
Ikoma-gun, Nara 636-01 (JP)**

(30) Priority: **12.04.1996 JP 9089196**

(74) Representative: **Crawford, Andrew Birkby et al  
A.A. THORNTON & CO.  
Northumberland House  
303-306 High Holborn  
London WC1V 7LE (GB)**

(43) Date of publication of application:  
**15.04.1998 Bulletin 1998/16**

(60) Divisional application: **99106525.1 / O 935 249**

(73) Proprietor: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.  
Kadoma-shi, Osaka 571-8501 (JP)**

(56) References cited:  
**EP-A- 0 644 692 EP-A- 0 651 392  
EP-A- 0 677 961 EP-A- 0 737 980  
EP-A- 0 795 869 WO-A-95/12179  
WO-A-97/06531 JP-A- 7 334 939  
JP-A- 8 273 304**

(72) Inventors:  
• **YAMAUCHI, Kazuhiko  
Neyagawa-shi, Osaka 572 (JP)**  
• **SAEKI, Shinichi  
Sennangun, Osaka 599-03 (JP)**  
• **MIWA, Katsuhiko  
Moriguchi-shi, Osaka 570 (JP)**  
• **KOZUKA, Masayuki  
Neyagawa-shi, Osaka 572 (JP)**

• **PARKER D J: "DENSITY RE-INVENTING THE  
DISC" CD ROM PROFESSIONAL, vol. 8, no. 6,  
June 1995, ISSN 1049-0833, USA, pages 21/22,  
24, 26-33, XP000601322**  
• **BUECKEN R: "DVD: GESCHAEFT LAESST  
WARTEN" RADIO FERNSEHEN ELEKTRONIK,  
vol. 45, no. 11, November 1996, ISSN 0033-7900,  
DE, pages 18-20, 22, XP000678077**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 836 189 B1**

## BACKGROUND OF THE INVENTION

**[0001]** The present invention relates to an optical disc onto which an information signal is recorded and to a reproduction apparatus for the disc. In more detail, the present invention relates to an optical disc used for recording multimedia data, such as digital video data, audio data, and graphics data, and to a reproduction apparatus and method for such optical disc.

**[0002]** The achievement of large-capacity optical discs in recent years has led to a great deal of research into the development of multi-title optical discs. Here, the expression "multi-title" refers to the storage of a variety of video titles on a single disc to improve the cost-effectiveness of distribution and retailing of video titles, and, by doing so, increase the value-added of optical discs.

**[0003]** The expression "video titles" is used here to loosely refer to any video production which is represented by one or more sets of route information, which show the reproduction routes to be taken by an optical pickup when reading the optical disc, and sets of video information that are successively read by the optical pickup when tracing one of the reproduction routes. The video information referred to here is multiplexed data (usually referred to as an MPEG stream) which is made up of video data and audio data that have been subjected to compression at a high compression rate according to MPEG (Moving Pictures Experts Group) techniques.

**[0004]** Fig. 1 shows the structure of video titles which are recorded onto a multi-title optical disc. In this drawing, the expression "Single PGC" indicates titles which each only use one set of route information, while "Multi PGC" indicates titles which each include a plurality of sets of route information. The label "Loop present" indicates the presence of a loop attribute in the route information, with this attribute indicating the repetition of the retrieval of image information, while "No loop" indicates that no such loop attribute is present. Similarly, the label "Branch present" indicates the presence of conditional branch information in the route information, this conditional branch information indicating a branch to another set of route information which is performed interactively in response to a user operation.

**[0005]** In Fig. 1, the title for species (1) indicated by the labels "Single PGC", "No branch", and "No loop" is a single sequential title. A single sequential title refers to a title whose reproduction order is fixed according to one set of route information which has the title reproduced in order from the opening scene to the ending scene.

**[0006]** On the other hand, species (4), indicated by the labels "Multi PGC", "No branch", and "No loop", is a multi-sequential title. Here, a multi-sequential title is a title which can be reproduced in a variety of reproduction orders according to a plurality of sets of route information, and so is not simply reproduced from start to end.

**[0007]** Species (2) and (3) indicated by the labels "Single PGC", "No branch", and "Loop present", or "Multi PGC", "No branch", and "Loop present" are quiz-type titles. Quiz-type titles are video titles where the video information indicated by the route information is read many times in a random order. Examples of such quiz-type titles are aerobics titles and educational titles which use drills.

**[0008]** Species (5) and (6) indicated by the labels "Multi PGC", "Branch present", and "Automatic", or by the labels "Multi PGC", "Branch present" and "Interactive" correspond to titles which are known as "interactive titles". Here, interactive titles are titles whose reproduction route dynamically changes in accordance with user operations made in response to menus that are displayed during the reproduction of the title.

**[0009]** The difference between interactive titles with the "Interactive" and "Automatic" labels is that "Automatic" interactive titles include a default reproduction route which is prepared beforehand for the case when no user selection operation of a branch destination is made.

**[0010]** The difference kinds of title in species (1) to (6) are classified depending on the number of reproduction routes, the existence of branch information, and the existence of loop attributes. Here, information for classifying the titles stored on an optical disc into these different types is generally referred to as the "formation" of a title.

[0011] The big disadvantage of storing different species (1) to (6) of video titles on a single optical disc is that a complex logical structure is required. Because of this complexity, it is difficult to achieve the reproduction features provided on conventional image reproduction apparatuses such as CD (Compact Disc), laser disc, or video CD players. Here, CD, laser disc, and video CD players are generally regarded as household AV (Audio-visual) appliances, with a search function and a feedback function being examples of the functions provided by such appliances which are problematic for multi-title discs.

**[0012]** The search function provided on a conventional AV appliance enables users to directly input a chapter number, song number, or expected reproduction time which may be written on the case of the disc, and by doing so instantly achieve reproduction of their desired data. The feedback function is a function which displays a chapter number, song number and/or present reproduction time to give the user real-time feedback showing what part of the data is presently being reproduced, with the reproduction time and chapter number being constantly updated as the reproduction of the disc progresses. These AV functions require the establishment of one-to-one correspondence between the disc storage

address of a set of data and the chapter number, song number and/or present reproduction time of the set of data. For conventional CDs, video CDs, and laser discs, data is recorded sequentially on a spiral track, so that disc reproduction apparatuses have been able to know the present reproduction time and present chapter number by merely looking at the disc storage address of the data presently being reproduced. As a result, when a chapter number or reproduction time is directly inputted by the user, such reproduction devices have been able to directly jump to the data which corresponds to the user indication. In the following explanation, the case where a jump is performed to data indicated by the input of a reproduction time (so many minutes and seconds) by the user will be referred to as a "time search", while the case when a jump is performed to data corresponding to an inputted chapter number will be referred to as a "chapter search".

[0013] For a multi-title optical disc, there is no one-to-one correspondence between disc storage addresses of sets of data and chapter numbers/reproduction time. As a result, it is necessary for disc reproduction apparatuses of multi-title optical discs to perform emulated AV functions. Here, the expression "emulated AV functions" refers to the execution by multi-title disc reproduction apparatuses of functions whose results resemble those of the search function and feedback function of conventional disc players.

[0014] When a multi-title optical disc reproduction apparatus is instructed to reproduce a video title, the decision as to whether to perform emulated AV functions for the indicated video title is made based on the number of sets of route information, on the existence of branch information, on the existence of loop attributes, and on the relation between the memory size of the disc reproduction apparatus and the execution speed. Here, it is necessary for the disc reproduction apparatus to determine whether the title only includes one set of route information, whether loop information exists, whether automatic branches exist, and whether interactive branches exist. However, since loop information, automatic branch information, and interactive branch information are distributed across an optical disc, the determination of the presence of each of them takes a considerable amount of processing time.

[0015] The following is an explanation of an example operation when a user inserts a multi-title optical disc into the disc reproduction apparatus and indicates the reproduction of one of the titles on the disc. Here, in order to determine whether emulated AV functions can be performed for the selected title, the disc reproduction apparatus has to determine whether there is only one set of route information, whether loop information is present, whether any automatic branches are present, and whether any interactive branches are present. Here, the apparatus can only know whether loop attributes or branch information are included in the sets of route information by referring to all sets of route infor-

mation used by the indicated title. Here, there is the possibility that even if a first set of route information does not include route information, a second or third set of route information may still include branch information, so that the reproduction apparatus must go to the trouble of referring to all of such sets of route information, thereby consuming a considerable amount of processing time.

[0016] The above example corresponds to a title classifying method (used by the present video CD standard) wherein branch information can be provided in sets of route information, although in interactive software developed in recent years, there is an increasing tendency for the provision of far more complex changes in image reproduction by providing route information which contains reproduction control information for performing branches and a variety of other forms of reproduction control.

[0017] Aside from the provision of reproduction control information in sets of route information, it is also possible to provide the same kind of reproduction control information in the management information interleaved into MPEG streams, or to distribute reproduction control information between MPEG management information and sets of route information, so that a great variety of story developments can be achieved. As a result, it becomes extremely difficult to detect reproduction control information which is distributed between so many locations to judge whether emulated AV functions are possible. Moreover, the reproduction of video data is performed for units which are several megabytes long, so that the investigation of reproduction control information is included in this kind of MPEG stream requires a memory capacity and disc seek speed which are well beyond the capability of economically-viable disc reproduction apparatuses.

[0018] In view of the difficulties when a plurality of titles are to be stored on a single optical disc, it has been suggested that AV functions should not be provided for any of the titles on a multi-title disc. However, in such a case, when viewing a same kind of title as was available for conventional video CD or laser disc, the user will not be able to make use of the AV functions to which he/she has become accustomed, thereby preventing jumps to a specified chapter number or reproduction time. This will not meet the user expectations for such reproduction and can be potentially lead to user dissatisfaction with this kind of equipment.

## 50 SUMMARY OF THE INVENTION

[0019] The primary object of the present invention is to provide a multimedia optical disc and a disc reproduction apparatus and method which can instantly distinguish whether emulated AV functions are possible for a title, even when video titles of a variety of types are recorded on a same optical disc. In more detail, the primary object of the present invention is to provide a mul-

multimedia optical disc and disc reproduction apparatus which, even if there are great discrepancies in the number of sets of route information used by titles, and if there is the possibility that branch information for branches to different sets of route information are present in both the variable code-length data (such as video data of several megabytes in length) and the route information, can still instantly distinguish whether emulated AV functions are possible for a title.

**[0020]** In order to achieve the stated object, the multimedia optical disc of the present invention as defined in claim 1 is an optical disc which includes a title area and a manager area. The title area stores a plurality of video titles which are video productions that are expressed using route information showing a route to be taken by an optical pickup and a plurality of sets of video information which are read in accordance with the route information. The manager area stores information for managing the video titles stored in the title area. Here, the titles stored in the title area include a first type which are expressed using one set of route information, a second type expressed using a plurality of sets of route information and branch information for establishing interactive branch control, and a third type expressed using a plurality of sets of route information but no branch information.

**[0021]** The manager area is characterized by including an address management area for storing management information for managing the address of each video title, and a reproduction type information area for storing reproduction type information which includes a first flag corresponding to the management information for each video title which shows whether the title is expressed by a single set of reproduction information or a plurality of sets of reproduction information and a second flag which shows whether the title is expressed using any branch information.

**[0022]** With the stated construction, reproduction apparatuses can instantly know whether each title includes branch information which may be present in management information which can be in any set of route information or management information that is interleaved into image information which can be tens of megabytes in size.

**[0023]** As a result, even when a user attempts to perform a chapter search or time search immediately after loading an optical disc into a reproduction apparatus, the reproduction apparatus can immediately determine whether such chapter search and time functions should be enacted or prohibited.

**[0024]** With the present disc, it is possible to record titles which contain a great variety of possible story developments due to the existence of branch information in both the management information and the route information on a same disc as orthodox titles for which emulated AV functions can be performed during reproduction. Chapter number display and reproduction elapsed time display are only performed for appropriate

titles, with the reproduction apparatus prohibiting display when not appropriate. In this way, the system ensures that inappropriate chapter or reproduction time display is not performed.

**[0025]** The reproduction apparatus for the present multimedia optical disc is defined in claim 9 and may comprise an optical pickup for optically reading data stored on the multimedia optical disc, a drive mechanism for the optical disc, a first control means for controlling the drive mechanism to read the recorded content of the manager area, a manager buffer for storing the content read from the manager area, a first receiving means for receiving an indication of a selection of an image title to be reproduced from the user, a calculation means for referring to the manager buffer and calculating an address of the title received by the first receiving means, a second control means for controlling the drive mechanism to read the video title from the address calculated by the calculation means, a judging means for referring to the first and second flags in the reproduction type information corresponding to the selected title and judging whether execution of AV functioning is possible for the selected title, and an AV function executing means for executing AV functions when judged possible, the AV functions at least including a search function for searching to an arbitrary position in a title based on an appropriate indication and a feedback function for monitoring and displaying a reproduction elapsed time. With this construction, the reproduction apparatus can instantly know whether each title includes branch information which may be present in management information which can be in any set of route information or management information that is interleaved into image information which can be tens of megabytes in size.

**[0026]** As a result, even when a user attempts to perform a chapter search or time search immediately after loading an optical disc into a reproduction apparatus to view a desired scene, the reproduction apparatus can immediately determine whether such chapter search and time functions should be enacted or prohibited.

**[0027]** A corresponding reproduction method is defined in claim 26.

**[0028]** The present reproduction is also able to reproduce titles which contain a great variety of possible story developments due to the existence of branch information in both the management information and the route information in addition to orthodox titles for which emulated AV functions can be performed during reproduction.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0029]** These and other objects, advantages and features of the invention will become apparent from the following description taken in conjunction with the accompanying drawings which illustrate a specific embodiment of the invention. In the drawings:



7

EP 0 836 189 B1

8

Fig. 1 shows examples of the kinds of titles that are stored on a multi-title disc;  
 Fig. 2A shows the appearance of the optical disc used in the present embodiment;  
 Fig. 2B shows a cross-section of the optical disc;  
 Fig. 2C shows an enlargement of the area around the focused spot of the laser beam;  
 Fig. 2D shows sequences of pits in the information layer 109;  
 Fig. 3A shows the track arrangement of the information layer of the optical disc;  
 Fig. 3B shows the physical sectors of the information layer of the optical disc;  
 Fig. 4A shows the logical construction of the optical disc;  
 Fig. 4B shows the basic arrangement of the file layer and the application layer;  
 Fig. 5A shows an example of a group of video materials which belong to Video Title Set V1;  
 Fig. 5B shows the internal composition of the VOBs which are included in the group of video materials of Video Title Set V1;  
 Fig. 6 shows the correspondence between the video materials, audio materials, and subtitle materials and each pack in a video object (VOB);  
 Fig. 7 shows the internal composition of a management information pack;  
 Fig. 8 shows the internal composition of a set of VTS management information;  
 Fig. 9 shows an example of the internal composition of the VTS internal title search pointer table;  
 Fig. 10A shows the internal composition of the PGC information management information table in a set of VTS management information;  
 Fig. 10B shows the format of the PGC information;  
 Fig. 10C shows the internal composition of the VOB position information table;  
 Fig. 11 shows an example of the internal composition of the Video Manager;  
 Fig. 12 shows an example of a volume menu;  
 Fig. 13 shows an example of the internal composition of the Highlight information for a volume menu;  
 Fig. 14 shows an example of the internal composition of the VM internal title search pointer table;  
 Fig. 15 shows a perspective view of the reproduction device of the present embodiment;  
 Fig. 16 shows an example of the key arrangement of the remote controller 91;  
 Fig. 17 is a block diagram of the internal construction of the DVD player 1 of the present invention;  
 Fig. 18 is a block diagram showing the composition of the signal separating unit 86;  
 Fig. 19 shows the internal construction of the system control unit 93;  
 Fig. 20 shows an example of the permitted function table 763;  
 Figs. 21A to 21D are flowcharts for the processing of the system control unit 93;

Figs. 22A to 22D are flowcharts for the processing of the remote controller processing routine of the system control unit 93; and  
 Fig. 23 shows another example of the flag composition of the title playback types.

# DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0030] In order to assist the reader's understanding, the following explanation has been divided into items which have each been given an index number. Here, the number of digits in the index number indicates the level of the item in question in the overall structure of the explanation. Here, the highest-ranked classification numbers are (1) and (2), with (1) relating to the optical disc and (2) relating to the reproduction device (disc player).

- (1) Physical Construction of the Optical Disc
- (1.1) Logical Construction of the Optical Disc
- (1.1.1) Logical Construction ... Video Title Set
- (1.1.1.1) Video Title Set ... Video Object (VOB)
- (1.1.1.1.1) Video Object (VOB)...
- Management Information Pack
- (1.1.1.2) Video Title Set...
- Video Title Set Management Information
- (1.1.1.2.1) Video Title Set Management Information
- PGC information
- (1.1.2) Logical Construction-Video Manager
- (2.1) Outline of the Disc Reproduction Device
- (2.2) Construction Elements of the Disc Reproduction Device
- (2.2.1) Disc Reproduction Device...
- Construction of Signal Separating Unit 86
- (2.2.2) Disc Reproduction Device...
- Construction of System Control Unit 93

## (1) Physical Construction of the Optical Disc

[0031] A digital video disc (DVD) which has a diameter of 120mm and has a storage capacity of 4.7GB on one side is ideally suited for use as the multimedia optical disc of the present embodiment.

[0032] Fig. 2A shows the appearance of the optical disc, while Fig. 2B shows its cross-section, and Fig. 2C shows an enlargement of the circled part of Fig. 2B. Starting from the bottom of this figure, DVD 107 is formed of a first transparent substrate 108, an information layer 109, a bonding layer 110, a second transparent substrate 111 and a print layer 112 for printing a label.

[0033] The first transparent substrate 108 and the second transparent substrate 111 are reinforcing substrates which are made of a same material and are around 0.6mm thick. This is to say, both substrates are roughly 0.5mm - 0.7mm thick.

[0034] The bonding layer 110 is provided between the information layer 109 and the second transparent sub-



ment area and a file area. The volume management area stores file system management information which is used to manage a plurality of logical blocks as files, in accordance with ISO13346 Standard. The file system management information shows the relations between the file names for a plurality of files and addresses of the groups of logical blocks which contain the corresponding files. This file system management information is used by the disc reproduction device to access the disc in file units. More specifically, on being given a file name by an application program, the operating system of a personal computer or workstation refers to all the system management information to calculate all of the groups of logical blocks for the file, before accessing these groups of logical blocks to fetch the desired digital data.

[0050] The following is an explanation of the logical construction of the application level. The information in this application level can be most loosely classified into a Video Manager and a plurality of Video Title Sets. Here, a Video Title Set is a group of movie titles which are classified from the viewpoint of common use of a same set of video material, while the Video Manager is information for managing all of the groups in the title sets as a single set. In the example shown in Fig. 4B, the grouping of video materials included in Video Title Set V1 is a collection of action scenes used in an action movie, while the grouping of video materials included in Video Title Set V2 is a collection of images shot on location at historical sites around the world.

[0051] Using the video materials included in Video Title Set V1, the title developer can produce a disc whereby a user may enjoy a no-cut version of action movie A, a general cinema release of action movie A, a television broadcast version of action movie A, an interactive version of action movie A, or a picture profile of the cast of action movie A. By making good use of common video materials on a single disc in this way, the developer can provide a plurality of applications to the user.

[0052] Using the video materials included in Video Title Set V2, the title developer can produce a disc whereby a user may enjoy a documentary about the excavation of historical sites, a multimedia guide to historical sites, an adventure game where participants search for historical sites, or a quiz about historical sites around the world. By making good use of common video materials on a single disc in this way, the developer can provide a plurality of applications to the user.

[0053] By classifying video titles in this way, it is possible to have a plurality of titles with common video materials grouped together.

#### (1.1.1) Logical Construction of Video Title Set

[0054] A Video Title Set consists of a set of Video Title Set management information and a group of video materials. The following explanation will first deal with the group of video materials in the Video Title Set. Normally,

when a movie is recorded onto film or video tape, an editing process is performed whereby only the required scenes are cut from the master tape after filming and are arranged into the order of the story, but when such scenes are recorded into a Video Title Set, such editing operations are not performed. This is to say, there are no traces of an editing process in which only the necessary parts of the necessary scenes are extracted and arranged into the order of the story. In fact, a Video Title Set can store video materials in a completely random order without any extraction of necessary materials from the original footage. The group of video materials which are stored in Video Title Set V1 are shown in Fig. 5A. While the scenes in Fig. 5A may be construed as forming the order of a story, this is merely for the sake of explanation, and in no way represents a necessary condition for the storage of a group of video materials.

[0055] The Video Title Set V1 in Fig. 5A includes a plurality of video objects (VOBs) which each have different reproduction times. Here, the expression "VOB" refers to one set of multiplexed stream data that is made up of various kinds of stream data, such as video data, audio data, sub-picture data, and control data, which are of variable code length, or in other words, an MPEG stream which is the unit used for one scene on a DVD. In the figure, VOB#1 has a reproduction time of ten minutes, and is an opening scene with scrolling credits showing the names of the director, the producer, the studio, and the cast. As another example, VOB#2 has a reproduction time of fifty seconds and is a scene which shows the main character walking around the Doutomburi area of Osaka City. This scene is actual footage shot using famous actors on location.

[0056] Fig. 5B shows how the sets of stream data of variable code length are multiplexed into one VOB. Here, each VOB is composed of a plurality of VOB units which are arranged in a time series starting from the first VOB unit. Each VOB unit which forms part of a VOB is a set of multiplexed data with a reproduction time which is usually 0.5-1.0 seconds. Here also, the variable code length data which can be multiplexed into a VOB is made up of video data, audio data, and sub-picture data, with the sets of these kinds of data which are multiplexed into each VOB unit being called video packs, audio packs, and sub-picture packs, each being 2K bytes in size.

[0057] In the example shown in Fig. 5B, VOB#1, whose reproduction time is ten minutes, is made up of 1,200 ( $=10 \times 60 \times 2$ ) VOB units, while VOB#2, whose reproduction time is fifty seconds, is made up of 100 ( $=50 \times 2$ ) VOB units. In the same way, VOB#3, whose reproduction time is eight minutes, is made up of 900 ( $=8 \times 60 \times 2$ ) VOB units, while VOB#4, whose reproduction time is forty-eight seconds, is made up of 96 ( $=48 \times 2$ ) VOB units.

[0058] While the VOB units in each VOB are arranged into a time series, each pack in each VOB unit is arranged in an order which, with the exception of the pro-

vision of the pack management information at the front, is completely random in terms of number of packs and pack order. This is to say, there can be VOB units which have the order audio data, sub-picture data, video data, and other VOB units which have the order, sub-picture data, video data, audio data. As other examples, there may also be VOB units which are made up of three hundred or so packs of nothing but video data, and other VOB unit which are made up of five hundred or so packs.

[0059] Here, the reason the order of the packs can be different for each VOB unit is that it is not necessary for packs of a same kind to be next to each other when the variable code length data is fetched and buffered by a reproduction apparatus. The example shown in Fig. 5B has the packs arranged into a regular order in each VOB unit, although this is merely for the sake of explanation and is not a necessary condition for the data construction.

[0060] The reason why there is a variable number of video and sub-picture packs is that these kinds of data are coded with a variable code length, so that even if both kinds of pack have a reproduction time of 0.5-1.0 seconds, there is a considerable difference in the amount of data which is required to achieved such reproduction. The most clear example is data for a moving image. When reproducing a background still image for 0.5 seconds, or a static close-up of a character's facial expression for 0.5 seconds, only a small amount of data is necessary. However, to reproduce a moving image of an actor whose movements are pronounced, a much larger amount of data is required. This large discrepancy in the amount of data is due to the fact that the reproduction of a static image, such as the background image or the character's expression, can be achieved using only one frame which is subjected to frame internal decoding and field internal decoding, while action scenes and car chase scenes need to utilize movement compensation prediction to compensate for the movement of the object being filmed.

[0061] Large discrepancies are also present for sub-picture data, so that there are large differences in the amount of subtitle information between scenes where the characters are engaged in a lively argument, and scenes where the characters are calmly shaking hands, which in turn leads to differences in the number of sub-picture packs provided in each VOB unit for a reproduction time of 0.5 seconds.

[0062] To achieve reproduction with the unit time at 0.5 seconds, it is necessary to inform the disc reproduction apparatus before the start of the 0.5 second period where it is sufficient to transfer only a small amount of data, or whether a large amount of data is required, and to have the decoder provided in the disc reproduction apparatus perform decoding for the necessary amount of transferred data. Here, to have variable code-length data reproduced with a uniform reproduction time of 0.5 seconds, a management information pack is provided at the start of each set of VOB unit, with this manage-

ment information pack indicating transfer rate which is required for the reproduction of the VOB unit to which it belongs, as well as the transfer rate and buffer size which are required by each of the video stream, the audio stream, and the management information stream in the VOB unit. By having the management information pack specify the transfer rates in this way, the disc reproduction apparatus is able to decode the video data, audio data, and sub-picture data which follows the management information pack. To give a specific numerical example, 0.5 seconds of video reproduction will generally require several hundred video packs, with the reproduction device being informed of a necessary transfer rate in the region of 4.5 Mbit/second before such number of packs are read from the DVD to enable the decoding of such number of video packs.

[0063] For the example shown in Fig. 5B, if each VOB unit is considered as comprising an average of 200 packs, VOB#1, which has a reproduction time of ten minutes and is made up of 1,200 ( $=10 \times 60 \times 2$ ) VOB units, will be made up of 240,000 packs. Of these, 1,200 will be management information packs. Since the size of each pack is standardized at 2 Kbytes, the storage of this VOB#1 will take up a 480 Mbyte ( $=240,000 \times 2\text{Kbyte}$ ) area on a DVD.

[0064] In the same way, VOB#3, which has a reproduction time of eight minutes and which is made up of 960 ( $=8 \times 60 \times 2$ ) VOB units, will be made up of 192,000 packs, so that the storage of VOB#3 on a DVD will take up a 384 Mbyte ( $=192,000 \times 2\text{Kbyte}$ ) area.

[0065] VOB#4, which has a reproduction time of forty-eight seconds and which is made up of 96 ( $=48 \times 2$ ) VOB units, will be made up of 19,200 packs, so that the storage of VOB#3 on a DVD will take up a 38.4 Mbyte ( $=19,200 \times 2\text{Kbyte}$ ) area.

[0066] The video packs stored in a video object (VOB) are arranged so that the digital data in the video packs in one VOB unit forms at least one set of digital video data called a group of pictures (GOP). Here, the expression "group of pictures" refers to the unit which is used when decompressing compressed digital video data, and is made of around twelve to fifteen frames of video data. The details of GOPs are standardized according to the MPEG2 (Moving Pictures Experts Group) standards, ISO 11172 and ISO 13818.

[0067] Fig. 6 shows the relation between each pack in a video object (VOB) and a video scene. In the figure, the video material in this one scene is depicted using a long horizontal strip which has been positioned above the VOB. Three channels of audio materials and two channels of subtitle materials are also given below the VOB. In Fig.6, the arrows shown extending downwards from the video materials show how the video materials are stored in each video pack provided in the data field of the VOB.

[0068] By tracing the arrows from the video materials, it can be seen that the video from the start of reproduction of the scene to the 0.5 second mark is coded into 1

pictures (Intra-pictures), P pictures (Predicative pictures), and B (Bidirectionally predicative pictures) and then stored in the data fields of video packs 1 and 2 in VOB unit 1. As described above, the video data will in reality be stored in several hundred video packs, though, for ease of explanation, only two of such packs have been shown in Fig. 6. In the same way, the video from the 0.5 second mark to the 1.0 second mark is coded in I pictures, P pictures, and B pictures and is then stored in the data fields of video packs 3 and 4 in VOB unit 2. Although not shown in the drawing, the video from the 1.0 second mark to the 1.5 second mark is coded and stored in the data fields of the video packs in the next VOB unit.

[0069] The following is an explanation of the relation between the three channels of dubbing soundtracks for one scene and the audio packs in the data field of the VOB. In the same way as with the video data, the arrows extending away from the audio materials to the audio packs in the VOB show that the audio materials are subjected to one of two kinds of coding and are stored in the data field of each audio pack in 0.5 second units. This is to say, the dubbing soundtrack on channel A from the start of the reproduction of the scene to the 0.5 second mark is recorded in the data field of audio pack A-1 of VOB unit 1, while the dubbing soundtrack on the same channel from the 0.5 second mark to the 1.0 second mark is stored in the data field of audio pack A-2 in VOB unit 2. Although not shown in the drawing, the audio on this channel from the 1.0 second mark to the 1.5 second mark is coded and stored in the data field of the audio pack A-3 in the next VOB unit. As described above, synchronization between audio and video is achieved using a PTS (Presentation Time Stamp) which is standardized under MPEG, so that it is not necessary for all of the audio data to be included in the same VOB units as the video data to which it corresponds, so that such audio data may in fact be stored in a preceding or succeeding VOB unit, for example.

[0070] The dubbing soundtrack on channel B from the start of the reproduction of the scene to the 0.5 second mark is recorded in the data field of audio pack B-1 of VOB unit 1, while the dubbing soundtrack on the same channel from the 0.5 second mark to the 1.0 second mark is stored in the data field of audio pack B-2 in VOB unit 2. Although not shown in the drawing, the audio on this channel from the 1.0 second mark to the 1.5 second mark is coded and stored in the data field of the audio pack B-3 in the next VOB unit.

[0071] The dubbing soundtrack on channel C from the start of the reproduction of the scene to the 0.5 second mark is recorded in the data field of audio pack C-1 of VOB unit 1, while the dubbing soundtrack on the same channel from the 0.5 second mark to the 1.0 second mark is stored in the data field of audio pack C-2 in VOB unit 2. Although not shown in the drawing, the audio on this channel from the 1.0 second mark to the 1.5 second mark is coded and stored in the data field of the audio

pack C-3 in the next VOB unit.

[0072] The audio data on the three channels which are distributed among the data fields of audio pack A-C will hereinafter be referred to as audio data A, audio data B, and audio data C. As one example, a dubbing soundtrack in English can be set as audio data A, a dubbing soundtrack in French can be set as audio data B, and a dubbing soundtrack in Japanese can be set as audio data C, so that the user can switch between them as desired.

[0073] In the example shown in Fig. 6, two sub-picture packs A,B are present in each VOB, so that two channels of subtitles can be stored distributed between the data fields of sub-pictures A, B in each VOB unit. As one example, English subtitles can be displayed as sub-picture data A, with French subtitles being displayed as sub-picture data B, so that the user will be able to switch between them.

[0074] By sorting the pack data according to type and recombining, digital data sequences which are formed of video data, audio data, sub-picture data, or control data are produced. These sorted and recombined groups of pack data are called elementary streams, so that each VOB is a program stream, or "system stream" which is made up of a plurality of these elementary streams.

#### (1.1.1.1) Video Object (VOB) -Management Information Pack

[0075] Management information packs have been described above as specifying a transfer rate and as being arranged at the front of each VOB unit. Since a management information pack is stored at the front of each VOB unit, each management information pack is only opened in a buffer in the disc reproduction apparatus for the 0.5 seconds while the video packs, audio packs, and sub-picture packs in the first VOB unit are read and reproduced, before the management information pack in the next VOB unit is read. Once this 0.5 period has expired, the next management information pack is overwritten into the buffer. Since each management information pack is only opened in the buffer during the reading of the video, audio, and sub-picture packs in the same VOB unit, in addition to the transfer rate, control information which only applies to the present VOB unit can be indicated to the disc reproduction apparatus for only the 0.5 - 1.0 second period for which the video, audio, and sub-picture packs in the present VOB unit are reproduced.

[0076] Fig. 7 shows the data construction of the management information pack. While the video packs, audio packs, and sub-picture packs are each formed of one packet, the management information packs are each formed of two packets. Of these, one packet is called a PCI packet (Presentation Control Information packet) and the other is called a DSI packet (Data Search Information packet). The data construction of a management

information pack is somewhat different to that of a video packet or an audio packet in that it is made up of a "pack header", a "system header", a "packet header for PCI packet", a "data field for PCI packet", a "packet header for DSI packet" and a "data field for DSI packet".

[0077] The system header stores management information for the entire VOB unit which has this management information pack at the front, according to MPEG standards. It stores the overall necessary transfer rate and an indication of a transfer rate and buffer size for each of the video stream, the audio stream, and the sub-picture stream.

[0078] The stream IDs of the two packet headers in a management information pack, as shown by the oblique shading in Fig. 7, is set at the identification code "1011 1111" which indicates "private stream 2".

[0079] The PCI packet contains the Highlight information which is used to perform reproduction control in accordance with cursor operations for menus and confirmation operations for items, when the sub-picture pack is used to display a menu made up of a plurality of items. In the present embodiment, branches of reproduction route which perform a switch from a present reproduction route to another reproduction route are a representative example of such "reproduction control in accordance with confirmation operations". Here, switching of reproduction route is performed by having commands, named "Highlight commands", stored in the Highlight information corresponding to each item in a menu, and by having these commands executed when the management information pack is read by the disc reproduction apparatus. Since these commands which correspond to each item, which in turn correspond to the confirmation operation, are executed selectively, reproduction routes can be switched in units of one set of PGC information. PGC information is described in more detail later in this specification.

[0080] A DSI packet stores information which is necessary for the reproduction of an MPEG stream from the present data position. Each DSI packet also stores the addresses of the preceding and succeeding DSI packets, which are referred to when special reproduction functions, such as fast forward, are performed.

[0081] This concludes the explanation of video objects (VOB), so that the following explanation will deal with the composition of the Video Title Set management information in the Video Title Set.

#### (1.1.1.2) Video Title Set-Video Title Set Management Information

[0082] The Video Title Set management information is a collection of control information for reproducing the video materials, which have not been subjected to any editing processes and have not been arranged in order of reproduction, so that they make up one video title.

[0083] In the present embodiment, a video title is an image production that is expressed using (1) a Video

Title Set number which is uniquely assigned to the title on the optical disc, (2) one or more sets of PGC information which show the route taken by the optical pickup in reading the optical disc, and (3) image information which is successively read from the optical disc in accordance with the PGC information. These kinds of information are managed by the title set management information for each Video Title Set. An example of such Video Title Set management information is shown in Fig. 8. As shown in Fig. 8, this Video Title Set management information is composed of a VTS internal title search pointer table, a PGC management information table, and a VTS time map table.

[0084] The PGC management information table is a table which stores a plurality of sets of PGC information. As described above, VOBs are not subjected to editing processes, so that information showing which video materials are to be extracted and reproduced in the required order is necessary. This role is fulfilled by the plurality of sets of PGC information in the PGC management information table. Here, each set of PGC information is information which, in addition to specifying the retrieval order of VOBs, specifies the various control procedures to be executed by the disc reproduction apparatus when the VOBs in question are reproduced. Examples of such control procedures are control to find a VOB (which is to be read according to PGC information) at the start of a chapter indicated by a chapter number, control to display the present reproduction time for the VOB (which is to be read in accordance with PGC information), control to find a desired image content in accordance with an indication of reproduction time, and control for performing a branch between sets of PGC information.

[0085] The order of VOBs in the sets of PGC information in the PGC management information table is expressed as a sequence of sets of VOB position information. Here, the order of position information held by sets of PGC information is interpreted by the disc reproduction apparatus as the retrieval order for VOBs. The sets of PGC information shown in the figure each have a different retrieval order for VOBs, with this showing that a plurality of video titles with different reproduction orders are achieved by having a plurality of sets of PGC information which each have rearranged position information for VOBs.

[0086] It should be especially noted here that there are branches between the sets of PGC information recorded in the PGC management information table. Here, many sets of PGC information which do not include definite information showing where branches to the present set of PGC information originate, or information showing what set of PGC information is branched to next are recorded in the Video Title Set, since these sets of PGC information feature dynamic branches where conditional branch instructions are performed in accordance with user operations made during reproduction.







all composed for PGC information #1, since out of the sets of PGC information #1-#6 in Fig. 9, a feedback function is only possible for PGC information #1 that is set as the Entry-PGC of the sequential title.

#### (1.1.1.2.1) Video Title Set Management Information-PGC information

**[0097]** The following is an explanation of the data construction and the detailed content of the PGC information #1, #2, #3 ... #6 in the PGC management information table. Here, Fig. 10A shows an example of the PGC information management table. As shown in this figure, PGC information #1, #2, #3 ..... #6 have a common aspect in that they are all generated with the data format shown in Fig. 10B as a template, although they each differ in content.

**[0098]** The VOB position information table uses sequences of VOB position information to indicate to the disc reproduction apparatus what VOBs should be read in what order for the present set of PGC information. Each set of VOB position information shows to the disc reproduction apparatus the storage position of each VOB on the optical disc, so that the disc reproduction apparatus can have the optical pickup scan that storage position. As shown in Fig. 10C, each set of VOB position information in the present embodiment is expressed using as a "VOB reproduction time", a "VOB offset", and a "No. of blocks in VOB". When reading a VOB, the disc reproduction apparatus uses the offset numbers included in the VOB position information and calculates the logical block number of the logical blocks in which the VOB is stored, before having the optical pickup scan only the number of logical blocks indicated by the "No. of blocks" on the track of the optical disc.

**[0099]** The PGC link information is information which shows what reproduction route continues after the present logical block, and stores link destination information which shows what set of PGC information should be next read into the buffer. When the reproduction according to one set of PGC information is completed by the disc reproduction apparatus, the next set of PGC information is determined in accordance with the "PGC link information", and this next set of PGC information is read from the disc and overwritten into the buffer. In this way, the PGC information is updated and reproduction control can continue in accordance with the reproduction route indicated by this updated set of PGC information. Here, for the example shown in Fig. 10A, only PGC information #2 includes a branch destination (PGC information #13), with the PGC link information of the other sets of PGC information being set at "NULL". This means that only PGC information #2 has a fixed link destination.

**[0100]** The PG map is information which shows how VOBs to be reproduced by the present PGC information are grouped together into chapters, and has a data construction in the form of a table which shows the corre-

spondence between the plurality of PG numbers indicated by the arrow a10, and the entry VOBs. Here, a PG (program) is a collection of the plurality of VOBs given in reproduction order by the present PGC information which are grouped together in a single chapter, with an entry VOB being a VOB positioned at the start of a PG.

**[0101]** As one example, PGC information #10 sets a reproduction order to nine VOBs which are numbered VOB#1, #2, #3, #4.....#9, with VOB#1 being set as the entry VOB for chapter number PG1, VOB#3 being set as the entry VOB for chapter number PG2, and VOB#6 being set as the entry VOB for chapter number PG3. By doing so, VOB#1 and #2 are grouped together into chapter PG1, VOB#3 to #5 are grouped together into chapter PG2, and VOB#6 to #9 are grouped together into chapter PG3. When a chapter number is directly inputted into the disc reproduction apparatus via a remote controller or a control panel, the PG number for the indicated chapter number is found, and retrieval is commenced starting from the Entry VOB of the corresponding PG number.

**[0102]** For the example shown in Fig. 10A, an entry VOB for a chapter number are only written in PGC information #1, with "NULL" being written into PGC information #2, #3, #4, #5 and #6. This is because of the premise that the search operations using chapter numbers are performed using only PGC information #1.

**[0103]** The PGC standard information is made up of the number of repetitions, which shows the number of times the sequence of VOBs written in the VOB position information is repeatedly retrieved, and a flag which shows whether the VOBs are randomly selected during this repetitive retrieval.

**[0104]** For the example shown in Fig. 10A, "5Loop Random" and "3Loop Random" are written in PGC information #3 and PGC information #4, respectively, with "NULL" having been written in the other sets of PGC information. Here, "Random" is attribute information which is an indication for random retrieval. If the standard information is set as described above, the retrieval of the VOBs indicated by the VOB position information of PGC#3 is performed five times, with the VOB to be retrieved in these five repetitions being randomly selected.

**[0105]** The PGC command table stores various kinds of commands which include conditional branch commands which are added to the "VOB position information table". By executing the commands which are written here before and after the retrieval of VOBs based on the VOB position information table, the disc reproduction apparatus can perform a more dynamic switching of reproduction routes.

**[0106]** The conditional branch commands shown in the present figure are expressed as comparisons to see whether the values of general registers and immediate values are equal or higher/lower, with the branch destinations being expressed as PGC numbers. Here, general registers are registers for storing values in accord-

ance with operations made by the user during reproduction, and are used to inform the disc reproduction apparatus of user operations which have been made using a remote controller or a control panel.

[0107] For the example shown in Fig. 10A, a PGC command table has been written into PGC information #5 and PGC information #6, while the word "NULL" has been written into each of PGC information #1 to #4. This shows that for PGC information #5 and #6, determination of a branch destination is based on commands.

[0108] The PGC command table of PGC information #5 stores "CmpRegLink R1, 3, "=", PGC#15" and "CmpRegLink R1, 4, "=", PGC#16". The former of these commands shows that the PGC information #15 is selected as a branch destination when the stored value of the general register R1 inside the disc reproduction apparatus is equal to "3". In the same way, the latter of the commands shows that the PGC information #16 is selected as the branch destination when the stored value of the general register R1 inside the disc reproduction apparatus is equal to "4".

[0109] The PGC command table of PGC information #6 stores "Title Play Title#5" which indicates that the title of title number #5 is the branch destination of PGC information #6.

#### (1.1.2) Logical Construction-Video Manager

[0110] The Video Manager is made up of VTS internal title search pointers, video objects, and sets of PGC information, with it being possible for its data construction to be standardized to that of the Video Title Set (although it should be obvious that it is far more simplified than that of the Video Title Set). The difference between the VOBs for the Video Manager and the VOBs for the Video Title Set lies in the fact that the Video Manager is used exclusively for reproducing the volume menu. Here, the expression "volume menu" refers to a menu in which all of the titles stored on the optical disc are recorded, so that when the volume menu is displayed, the user can select one of the titles. When an optical disc is loaded into the disc reproduction apparatus, this volume menu is displayed on the screen immediately after the optical pickup has moved from the volume management area to the file area.

[0111] Since the Video Manager is only used for the volume menu, there are the following two differences between the Video Manager and the Video Title Set. Firstly, while the VOBs in the Video Title Set include video data for actual footage, sub-picture data and audio data, the VOBs in the Video Manager only contain a video pack, a sub-picture pack and a management information pack for a background image for a menu. Secondly, the branch destinations of the branch commands in the PGC information and the management information of the Video Title Set, with certain exceptions, do not exceed the range of the Video Title Set, while the branch commands in the Video Manager have branch

addresses for titles in a variety of Video Title Sets on the optical disc, so that they can cross over between Video Title Sets.

[0112] The most significant characteristic of the Video Manager is that it is loaded into a memory provided in the disc reproduction apparatus for the duration that the optical disc is loaded in the disc reproduction apparatus. By having the Video Manager stored in memory in this way, the disc reproduction apparatus can refer to the content of the Video Manager without performing a disc access operation.

[0113] Fig. 11 shows the data construction of the Video Manager. As shown in this figure, the Video Manager is composed of "VOBs for menu", "menu PGC information", and a "VM internal title search pointer table".

[0114] The "VOBs for menu" are VOBs which are specially used for the volume menu. As their name suggests, they include the sub-picture pack for displaying the volume menu and the management information pack for performing reproduction control in accordance with cursor operations and confirmation operations. The display image for a volume menu is shown in Fig. 12. The VOB for the volume menu includes a sub-picture pack in which character strings showing the titles have been subjected to run-length encoding, the titles being "Action movie A: General release version", "Action movie A: Digest", "Action movie A: Profile Quiz", "Action movie A: TV broadcast version", "Action movie A: Multi-story version", and "Action movie A: Multimedia book". The user selects one of these title name character strings and performs a confirmation operation to indicate the title to be reproduced. Here, the management information pack in the same VOB includes a same number of sets of item information as there are titles, as shown in Fig. 13. These sets of item information store a "Title Play" command which indicates a branch to each title number and a "palette conversion range" which shows the area on the display whose color will change when the corresponding item is in the selection condition.

[0115] The set of "menu PGC information" (shown as PGC information for Menu in the drawings) is a set of PGC information which is exclusively used for the volume menu, and stores the recording position of the corresponding menu VOB so that the menu VOB can be read when the optical disc is loaded into the disc reproduction apparatus. This set of PGC information is read by the disc reproduction apparatus immediately after the disc has been loaded in the disc reproduction apparatus and the optical pickup has moved from the volume management area to the file area, and is used to guide the optical pickup so as to read the menu VOB. In this way, the volume menu can be displayed on the screen.

[0116] The VM internal title search pointer table is made up of a plurality of VM internal title search pointers #1 .... #99 which each correspond to a title number. An example of this table is shown in Fig. 14. In this figure, the VM internal title search pointer #1 corresponds to

title number 1, with VM internal title search pointers #2 and #3 respectively corresponding to title numbers 2 and 3.

[0117] VM internal title search pointer #1 includes a pairing of a Video Title Set number and a VTS internal title number, in addition to a "title playback type". Here, a "title playback type" is information for immediately informing the disc reproduction apparatus, when a selection has been made from the volume menu, of the classification of the corresponding title in the VM title search pointer table.

[0118] Here, the disc reproduction apparatus is informed of the species type into which the selected title has been classified immediately after the title is selected from the volume menu, since it is too late to have such classification established after reproduction of the title has started. This is necessary in order to have the disc reproduction apparatus perform a certain process in a very short period of time. This process is the recognition by the disc reproduction apparatus of whether emulated AV functions are possible. This recognition needs to be performed in such a short time since it is necessary to have present reproduction time "00:00:00" and chapter number "00" displayed on the panel provided on the disc reproduction apparatus immediately after the user has loaded the optical disc into the disc reproduction apparatus and has performed a title selection operation. This is also necessary since there is the possibility of the user attempting to perform a chapter search operation and time search operation immediately after performing the title selection operation.

[0119] If, on the other hand, the recognition of whether to perform emulated AV functions takes is too slow, it will not be completed within the short period of time described above, so that the display of the present reproduction time "00:00:00" and the chapter number "00" will not be made in time for the start of reproduction, or the disc reproduction apparatus will not be able to respond to chapter search operations and time search operations made for a title immediately after title selection.

[0120] Here, in order to determine whether emulated AV functions are possible for a title, it is necessary to recognize the classification to which the selected title belongs. The recognition of this classification is made by determining the "number of sets of route information", the "presence of loops", and the "presence of automatic branches", which is performed by judging whether there is any link destination PGC information in the link PGC information, whether there is any conditional branch information in the PGC command table, and whether there are any loop attributes in the PGC standard information. However, since the sets of PGC information are distributed within the Video Title Set management information of each Video Title Set, it is necessary for the disc reproduction apparatus in making this judgment to write into memory the management information of the Video Title Set which stores the title that has been selected by the user. If such access to the Video Title Set

is necessary, then the display of the present reproduction time "00:00:00" and the title search number "00" will be delayed by the time taken by this access.

[0121] Also, to properly determine the "presence of branches", it is necessary to check that no branch commands are present in any of the PCI packets in the large number of management information packs which compose one VOB. However, since the size of each VOB is in the region of several megabytes, it is extremely difficult to perform this checking of management information packs in a very short period of time.

[0122] In view of these problems, a "title playback type" which classifies each title into one of the groups is provided beforehand in the VM internal title search pointer table, so that the disc reproduction apparatus can be informed, as soon as a title is selected, of the group to which the selected title belongs.

[0123] The title playback type includes a plurality of flags for showing the format of the various titles. The reference numerals a141, a142, and a143 shown in the figures indicate the "sequential single PGC identification flag", the "no branch flag" and the "no branch between titles" flag, with these flags being set at "On" or "Off" to indicate the format of each title.

[0124] When the "single sequential PGC identification" flag is "On", the title selected by the user is expressed by only one set of PGC information which indicates all of the VOBs from the opening scene to the ending scene. When it is "Off", the VOBs from the opening scene to the ending scene are expressed by several sets of PGC information or loop information indicating that the set of VOBs are repeatedly read a number of times is included in the PGC standard information. For the example shown in Fig. 14, the "sequential single PGC identification" flag is only "On" for the VM internal title search pointer #1, with the "Off" state of the "sequential single PGC identification" flag for the VM internal title search pointers #2 and #3 showing that out of the title names displayed in the list in the volume menu, only the "Action movie A: General release version" of title number 1 is expressed by one set of PGC information indicating all of the VOBs from the opening scene to the ending scene.

[0125] When the "no branch" flag is "On", this shows that there are absolutely no branch commands for branching to another set of PGC information in either the PGC command field of the PGCs included in the title, or in any of the hundreds or thousands of management information packs in the VOBs of several megabytes in length which are indicated in the retrieval order shown in the sets of PGC information for the title. For the example shown in Fig. 14, the "no branch" flag is "Off" for VM internal title search pointers #2 to #9, while the "no branch" flag is "On" for VM internal title search pointer #1. This arises since for the case of video title "Action movie A: General release version" corresponding to VM internal title search pointer #1, PGC information #1, which is the Entry-PGC information for Video Title Set

**[0130]** The "no branch between titles" flag is a flag for showing whether any branches to another title occur during the reproduction of a title, aside from when a title number is selected. More specifically, the "no branch between titles" flag guarantees that the command fields in the items of the management information packs and the command fields in PGC information definitely do not contain any branch instructions which branch to another title.

### (2.1) Outline of the Disc Reproduction Device

**[0135]** The remote controller 91 is used for receiving user operations. An example of the key arrangement on the remote controller 91 is shown in Fig. 16. Here, the ten key 911 is used in combination with the other keys for numerical input. The cursor keys 912 arranged in a cross area used for changing the selected item. The "ENTER" key is used for performing the confirmation of selections. To make a search indication, the "CHAPTER" or "TIME" keys is pressed, the numerical input becomes possible and a numerical input made using the ten key 911 is displayed on the display unit 913. If the user presses the "CHAPTER" or "TIME" key again, a time or chapter search is performed in accordance with the user indication. The "TITLE PROGRAM" key and "PROGRAM" key are also provided for indicating program reproduction, with a pressing of these keys also making numerical input possible, so that if a number showing the reproduction order is inputted using the ten key and a same program key is pressed, the reproduction command is confirmed. Using the "TITLE PROGRAM" key, the user can indicate programmed reproduction for a title, while the "PROGRAM" key is used to indicate programmed reproduction for a chapter. As one example, if the user presses the "TITLE PROGRAM" key and the reproduction order "3", "4", "2" using the ten key, title number "3", title number "4", and title number "2" are reproduced in that order.

## (2.2) Construction Elements of the Disc Reproduction Device

**[0136]** Fig. 15 is a block diagram showing the construction of the DVD player used in the present embodiment. The DVD player includes a drive mechanism 16, an optical pickup, a mechanism control unit 83, a signal processing unit 84, an AV decoding unit 85, a remote control receiving unit 92, and a system control unit 93. AV decoding unit 85 comprises a signal separating unit 86, a video decoder 87, a sub-picture decoder 88, audio decoder 89, a state display unit 209, and a picture mixing unit 90.

**[0137]** The remote control receiving unit 92 receives a key signal which is infra-red transmitted when a key on the remote controller 91 is pressed, and generates an interrupt signal showing the pressed key to notify the system control unit 93 of the pressed key as "reception instruction". Here, the kinds of reception instructions which can be used to notify the system control unit 93 include start reproduction instructions, stop reproduction instructions, button selection instructions, chapter confirmation instructions, chapter search instructions for an indicated chapter number, time search instructions for an indicated time, chapter program instructions including a reproduction order indication for chapters, and title program instructions including a reproduction order indication for titles.

**[0138]** The state display unit 209 is a display unit which is composed of a liquid crystal panel, or the like, that is provided on the front of the DVD player 1. The state display unit 209 controls the liquid crystal display in accordance with the indications from the system control unit 93, so as to display the title number of the title being reproduced, the chapter number, and the present reproduction time. On receiving a display invalidating signal from the system control unit 93, the state display unit 209 terminates the display of title number, chapter number and reproduction time. Here, it should be also noted that it is also possible for the state display unit 209 to be constructed to display only one of title number, chapter number, and reproduction time.

**[0139]** The drive mechanism 16 is comprised of a platter on which an optical disc is placed and spindle motor 81 for rotating the inserted optical disc. The platter can be moved in and out of the DVD player by means of an eject mechanism which is not shown in the drawing. The user places an optical disc on the platter when it has been projected forward outside the DVD player. After this, the platter is moved back into the DVD player so as to load the optical disc.

**[0140]** The mechanism control unit 83 controls the spindle motor 81 for rotating the disc and the mechanism made up of the optical pickup for reading the signal from the disc and actuator 82 of the optical pickup. Specifically, the mechanism control unit 83 adjusts the motor speed according to a track position specified by system control unit 93. At the same time, it moves the optical

pickup by controlling the actuator 82 of the pickup and, having detected a correct track by servo control, waits for a desired physical sector before reading signals continuously starting from desired position.

**[0141]** The signal processing unit 84 converts the signals read using the optical pickup into a sequence of digital data while performing various processes such as amplification, waveform shaping, conversion to binary, demodulation, and error correction. It then stores the processed data in a buffer memory inside the system control unit 93 in logical block units.

**[0142]** The AV decoding unit 85 applies certain processes to the digital data inputted as VOBs and converts them into the video signals and audio signals.

**[0143]** The signal separating unit 86 receives the digital data transferred from the buffer memory in units of logical blocks (packets), and classifies the data into packs of management information data, video data, sub-picture data, or audio data by identifying the stream ID and sub-stream ID of each packet. The signal separating unit 86 outputs video data to the video decoder 87, audio data to the audio decoder 89, and sub-picture data to the sub-picture decoder 88. The signal separating unit 86 also outputs management information packs to the system control unit 93. When such data is outputted, the system control unit 93 indicates numbers to the signal separating unit 86, with, as shown in Fig. 6, these numbers indicating one set of audio data (A, B, or C) and one set of sub-picture data (A or B). On receiving these indications from the system control unit 93, the signal separating unit 86 outputs only the data on the specified channels to the audio decoder 89 and the sub-picture decoder 89. The data on the other channels is discarded.

### (2.2.1) Disc Reproduction Device... Construction of Signal Separating Unit 86

**[0144]** Fig. 18 is a block diagram showing the construction of the signal separating unit 86. As shown in the drawing, the signal separating unit 86 comprises an MPEG decoder 120, a sub-picture/audio separating unit 121, a sub-picture selecting unit 122, and an audio selecting unit 123.

**[0145]** The MPEG decoder 120 determines the types of packs transferred from the buffer memory by checking the stream IDs and outputting the packets as follows. If the stream ID is "1110 0000", the MPEG decoder 120 outputs the packet to the video decoder 87. If the stream ID is "1011 1101", the MPEG decoder outputs the packet to the sub-picture/audio separating unit 121. Alternatively, if the stream ID is "1011 1111", the MPEG decoder 120 outputs the packet to the system control unit 93.

**[0146]** The sub-picture/audio separating unit 121 outputs the packets input from the MPEG decoder 120 to the sub-picture selecting unit 122 if their sub-stream ID is "001\* \*\*\*\*" or to the audio selecting unit 123 if their sub-stream ID is "1010 0\*\*\*". As a result, each set of

sub-picture data and audio data is appropriately output to either the sub-picture selecting unit 122 or the audio selecting unit 123.

[0147] The sub-picture selecting unit 122 outputs the sub-picture data on the channel number specified by the system control unit 93 to the sub-picture decoder 88 and discards the rest of the sub-picture data. If, as in the example of Fig. 6, sub-picture materials for channels A and B are respectively English and French subtitles, then a specification of channel A by the system control unit 93 will result in the sub-picture selecting unit 122 outputting the sub-picture data on channel A to sub-picture decoder 88, with the sub-picture data on channel B being discarded. As a result, the sub-picture decoder 88 decodes only the English subtitles.

[0148] The audio selecting unit 123 outputs the audio data on the channel number specified by system control unit 93 to the audio decoder 89 and discards the rest of the audio data. If, for the example shown in Fig. 6, the audio material on channels A, B, and C are English, French, and Japanese soundtracks, then a specification of channel A by the system control unit 93 will result in the audio selecting unit 123 outputting the audio data on channel A to the audio decoder 89, with audio packets B and C being discarded. As a result, the audio decoder 89 decodes only the English soundtrack,

[0149] The video decoder 87 decodes and decompresses the video data sent from the signal separating unit 86, before outputting the data to the picture mixing unit 90 as a digital video signal.

[0150] The sub-picture decoder 88 decodes and decompresses the sub-picture data sent from the signal separating unit 86 if the sub-picture data is image data compressed with run-length compression, and outputs the sub-picture data to the picture mixing unit 90 in the same format as the video signals. Here, if the image data is provided with a plurality of items and the user moves the cursor between these items, the system control unit 93 instructs the sub-picture decoder 88 to change the color of the image data in question. Such color changing indications are outputted based on the item color information recorded in the Highlight information, so that the display of items can be changed to the selection color or the confirmation color. Here, movement of the cursor among these items is displayed to the user by changing the selection color and confirmation color.

[0151] The description of the construction of the DVD player 1 continues with reference to Fig. 17. The audio decoder 89 decodes and extends the audio data sent from signal separating unit 86 before outputting digital audio signal.

[0152] The picture mixing unit 90 outputs a video signal after mixing the outputs from video decoder 87 and sub-picture decoder 88 according to the ratio specified by system controlling unit 93. This mixing ratio is determined based on the contrast given in the item color information in the Highlight Information, and can be

changed for each GOP unit. The picture signals are converted to an NTSC (National Television System Committee) video signal which is then inputted into the TV monitor 2.

#### (2.2.2) Disc Reproduction Device... Construction of System Control Unit 93

[0153] The following is an explanation of the internal construction of the system control unit 93 which is shown in Fig. 19. As shown in the figure, the system control unit is made up of a remote control input interpreting unit 71, a reproduction control unit 72, a button control unit 73, a command interpreting/executing unit 74, a buffer memory 94, a system state management unit 750, and a valid function determining unit 760.

[0154] The buffer memory 94 is used for storing the data which has been subjected to the various processes such as amplification, waveform shaping, conversion to binary, demodulation, and error correction. If the data written into the buffer memory 94 is Video Title Set management information, it is written into another buffer which is not illustrated. On the other hand, if the data is a VOB, the system control unit 93 transfers the data one pack at a time to the signal separating unit 86. By when VOBs are transferred in this way, the management information packs will be sent back from the AV decoder unit 85.

[0155] The remote controller input interpreting unit 71 interprets the remote control key data received by the remote control receiving unit 82. This interpreted remote control key data can be a start reproduction instruction, a stop reproduction instruction, button selection instruction, a button confirmation instruction, a chapter search instruction for an indicated chapter number, a time search instruction for an indicated time, a chapter program instruction including a reproduction order indication for chapters, or a title program instruction including a reproduction order indication for titles. Of these, button selection instructions and button confirmation instructions are outputted to the button control unit 73, while start reproduction instructions, stop reproduction instructions, chapter search instructions, time search instructions, chapter program instructions, and title program instructions are outputted to the reproduction control unit 72.

[0156] The button control unit 73 stores the management information pack of the VOB which is being reproduced which it receives from the AV decoder unit 85, and, when a button selection instruction and a button confirmation instruction are received from the remote controller input interpreting unit 71, outputs a control signal to the AV decoder unit 85 for changing the color of the sub-picture in a screen area assigned to the button to the confirmation color in accordance with the Highlight information in the PCI packet of the stored management information pack. Also, when a button confirmation instruction is received, it sends the command



assigned to the selected button to the command interpreting/executing unit 74.

**[0157]** The command interpreting/executing unit 74 interprets the command inputted from the button control unit 73 and, if there is a change of PGC information which changes the reproduction route, the command interpreting/ executing unit 74 outputs a reproduction control instruction notifying reproduction control unit 72 of the new PGC information, as well as outputting a system state control instruction notifying the system state management unit when there has been a change to the state parameters stored inside the system.

**[0158]** The valid function determining unit 760 is made up of a route information flag storage unit 761, a route information flag storage unit 762, and a permitted function table 763.

**[0159]** The route information flag storage unit 761 stores the "sequential single PGC identification" flag.

**[0160]** The route information flag storage unit 762 stores the "no branch" flag and the "no branch between titles" flag.

**[0161]** The permitted function table 763 stores the necessary combinations of the set states of the flags in the route information flag storage unit 761 and the route information flag storage unit 762 for each of a chapter number display function, a reproduction time display function, a chapter number search function, a time search function, a chapter programming function, and a title programming function to be permitted. An example of this permitted function table is shown in Fig. 20. As shown in this figure, the chapter number display function, the reproduction time display function, the chapter number search function, the time search function, and the chapter programming function are only permitted when both the "sequential single PGC identification" flag and the "no branch" flag are "On". In the same way, the title programming function is only permitted when the "sequential single PGC identification" flag and the "no branch between titles" flag are "On".

**[0162]** The system state management unit 750 includes a group of state registers 751 which is made up of all kinds of registers showing the present state of the disc reproduction apparatus, a video manager buffer 752 into which the Video Manager is loaded, and a PGC information buffer 753 into which the PGC information which is presently being used is loaded. Here, the group of state registers 751 is made up of an audio channel register, a sub-picture register, a PGC number register, a program number register, an index number register, a chapter number register, and a reproduction elapsed time register.

**[0163]** The audio channel register is used to store the audio channel number which is presently valid, with the sub-picture channel register storing the sub-picture channel number which is presently valid, with these numbers being outputted as a control signal to the AV decoder unit 85 to indicate the present audio channel and sub-picture channel. When reproduction is com-

menced by the reproduction control unit 72, the title number of the title being reproduced is stored in the title number register. At the same time, the number of the Entry-PGC information for the chosen title is stored in the PGC number register. Here also, when the reproduction of VOBs in the reproduction order indicated by the PGC information determined by the reproduction control unit 72, the program number of the classification number of the VOB which is presently being reproduced is stored in the program number register.

**[0164]** The chapter number register is used to store the chapter number, while the reproduction elapsed time register is used to store the elapsed reproduction time. The title number register stores the title number. While reproduction is being performed, the values stored by these registers are updated as is required. When such updating is performed, a control signal showing the updated value is outputted to the state display unit 209.

**[0165]** Figs. 21A-21D and 22A-22D are flowcharts for the processing of the system control unit 93. The operation of DVD player will be explained below with reference to these figures.

**[0166]** When the user presses the eject button on DVD player 1, the platter is moved outside of the cover.

When a user places an optical disc on this platter, the platter is then moved back into the DVD player 1 to load the disc. As shown in step S121 of Fig. 21A, the system control unit 93 is first waits for a disc to be inserted, and, on detecting that a disc has been loaded using an optical sensor or the like, controls the mechanism control unit 83 and the signal processing unit 84 to perform rotation control with the optical pickup is positioned in the lead-in region. This operation continues until stabilized rotation has been achieved, at which point the optical pickup is moved outward from the lead-in region and reads the volume management area. Based on the information in this volume management area, the video manager is written into the video manager buffer 752 (step S122). The system control unit 93 also calculates the storage address of the PGC information for the volume menu, and writes the PGC information into the PGC information buffer (step S123). Since this PGC information is for the volume menu, it is stored in the buffer, so that the system control unit 93 can refer to its content and calculate the storage address of the VOBs to be reproduced for the menu. Once the VOB to be reproduced is decided, the system control unit 93 outputs a control signal to the mechanism control unit 83 and to the signal control unit 84 and has the determined VOBs read from the optical disc. As a result, a volume menu, such as that shown in Fig. 12, is displayed on the TV monitor 2 (step S124). When this volume menu is displayed, the reproduction control unit 72 waits for the selection of a title number (step S125).

**[0167]** Here, the user views the list of titles and confirms a selection of his/her desired title number. The state display unit 209 is then made to display the selected title number (step S126), and the Highlight com-



mand, "PlayTitle", which is stored corresponding to the selected title number is read. Following this, in step S127 the VTS number #i and the VTS internal title number #j are read from the title search pointer #k corresponding to the title number #k indicated by the operands of the "PlayTitle" command. In step S128, the title playback type #k is read from the title search pointer #k corresponding to the selected title number #k. In step S129, it is judged whether the "sequential single PGC identification" flag is "On", and in step S130 it is judged whether the "no branch" flag is "On". These judgments are to confirm that title #k is a single sequential title, so that if either of the flags is "Off", a "No" judgment will be given and the processing will advance to step S135, where a "Chapter display and time display not possible" message is displayed together with the title number. In this case, in step S132, the state display unit 209 is deactivated and the processing advances to step S133. Note here that the display in step S135 is merely a display of information to the user, so that this step may be omitted.

[0168] When both of the flags are judged as being "On" in steps S129 and S130, the processing advances to step S131 where the time display of the state display unit 209 is reset to "00:00:00" and the chapter display is reset to "00", with the processing then advancing to step S133. In step S133, the title number #j and the number of the Entry-PGC information number are read from the title search pointer of the video title set indicated by the VTS number #i and are written into the group of state registers 751. The route processing routine is then called in step S134 with the PGC information #k read in this way as the Entry-PGC information.

[0169] Fig. 21B is the flowchart for the route processing routine. In this figure, the "VOB pointer" indicates the VOB to be read out of the VOB position information in the PGC information stored in the PGC information buffer 753, while the "block pointer" indicates the logical block which is presently being read in the VOB indicated by the VOB pointer. In step S141, the VOB pointer is initialized, which is to say set to the first VOB in the VOB position information table of the PGC information #k. In step S142, the block pointer is initialized, which is to say set at the first logical block in VOB#i indicated by the VOB pointer. Next, in step S143, a check is performed to see whether an event has been caused by a user operation, and if not, in step S144, the mechanism control unit and the signal processing unit are activated to read the logical block indicated by the block pointer. Here, since each VOB is made up of a plurality of VOB units which each have a management information pack at the front, a management information pack is read first by the signal processing unit 84. The signal processing unit subjects the signal read by the optical pickup to the variety of processes described above, and the processed data is stored in logical block units in the buffer memory inside the system control unit 93. The signal separating unit 86 receives the packs transmitted from the buffer

memory and refers to the stream ID and substream ID in the header of each pack to detect whether each pack is a management information pack. Here, detected management information packs are outputted to the system control unit 93.

[0170] The reproduction control unit 72 sets the transfer rate and buffer size included in each management information pack and prepares for the decoding of the video pack, audio pack, and sub-picture pack which follow the management information pack in question.

[0171] Next, in step S145, the reproduction control unit 72 judges whether the block pointer is indicating the final logical block in VOB#i, and if not, the processing advances to step S146 where the variable j is incremented by one and to step S147 where the block pointer is updated to the jth logical block in VOB#i. After this, the processing advances to step S148 in Fig. 21C.

[0172] In step S148 in Fig. 21C, a judgment as to whether the pack read according to the indication of the block pointer is a management information pack and whether the DSI packet included in this management information pack is one second long. This is performed since it is necessary to update the time display on the state display unit 209 in synchronization with the reading of management information packs which are provided at the front of 0.5 second-long VOB units. Here, if the reading of a VOB has just begun, the display of the state display unit 209 will not be updated, while when the reading has progressed and a DSI packet which is one second long has been read, the time display of the state display unit will be advanced by one second.

[0173] By repeating the processes in steps S143 to S147 the time display can be updated, with the video, audio, and sub-picture packs which compose the VOB being successively read. The signal read from the disc is processed by the signal processing unit 84 and is stored in logical block units in the buffer memory of the system control unit 93. Packs are then transmitted from the buffer memory to the signal separating unit 86 and the stream ID and substream ID in the header of each pack is judged.

[0174] For video packs, the MPEG decoder 120 judges whether the stream ID is "1110 0000" and outputs the packs to the video decoder 87. The video decoder 87 decodes the packs according to MPEG methods and having waited an appropriate time according to the SCR and PTS, outputs the decoded image signal to the picture mixing unit 90.

[0175] For sub-picture packs, the MPEG decoder 120 judges whether the stream ID is "1011 1101" and whether the first three bits of the substream ID are "001", and outputs the packs to the sub-picture decoder 88. The sub-picture decoder 88 decodes the packs according to run-length decoding and having waited an appropriate time according to the SCR and PTS, outputs the decoded image signal to the picture mixing unit 90.

[0176] The outputs of the video decoder 87 and the sub-picture decoder 88 are mixed by the picture mixing

unit 90 according to the mixing ratio specified by the system control unit 93. This mixed image signal is then converted to an analog signal and is outputted to the TV monitor 2.

[0177] As a result of the repetition of the above process, the block pointer ends up indicating the final logical block in the current VOB, so that the judgment "Yes" is given in step S145 and the processing advances to step S151. In step S151, it is determined whether the VOB pointer is indicating the final VOB in the VOB position information table for PGC information #k, and if not, the processing advances to step S152 where the variable i is incremented, and then to step S153 where the VOB position information is advanced to the next VOB in the VOB position information in PGC information #k. Following this, the processing moves to step S154 in Fig. 21D.

[0178] It should be noted here that when the VOB pointer is advanced to the next VOB, there is the possibility that the VOB newly indicated by the VOB pointer is the Entry-VOB for a program. A judgment to see whether this is the case is performed by the reproduction control unit 72 in step S154, with the judgment "Yes" resulting in the processing advancing to step S155 in Fig. 21D, where the chapter display by the state display unit 209 is advanced by one before the processing returns to step S142. Following this, the processing in steps S142-S147 is performed for the newly indicated VOB.

[0179] When it is judged in step S151 that the VOB pointer is indicating the final VOB in the VOB position information, this means that the present reproduction route has been completed. At this point, a check is performed to see if there is a post-processing command in the PGC information stored in the PGC information buffer 753. If there is, the branch destination PGC information #k is determined according to this post-processing command, or if not, the branch destination PGC information #k is determined according to the PGC link information, before the route processing routine is recurrently called in step S158.

#### Processing of reproduction control unit 72 for a chapter search

[0180] The following explanation deals with the case when the user makes a chapter search operation while reproduction is being performed as described above. In this case, the judgment "Yes" is given in step S143 and the processing advances to step S161 in Fig. 22A. In step S161, a judgment is made as to whether the chapter search key was pressed, in which case the processing advances to step S162. In steps S162, S163, judgments are made to see whether the "sequential single PGC identification" flag and the "no branch" flag are "On", and, if either of these flags is "Off", the processing advances to step S169 where the message "Chapter search function not available due to interactive repro-

duction" is displayed, before returning to step S144. As mentioned before, such display is not essential to the operation, and so may be omitted.

[0181] When both flags are "On", in step S164 the system waits for an input from the ten key 911. If the user presses the "8" key on the remote controller 91, the result "Yes" is given in step S164, and, in step S165, the inputted ten key code "8" is converted in program number "8". This program number "8" is then converted into an Entry VOB number #s, and in step S167 the converted Entry VOB number #s is set in the VOB pointer. In step S168, the first address in the Entry VOB number #s is set in the block pointer. After the pointers have been set in this way, the processing returns to step S144, where the indicated logical block is read by the mechanism control unit and signal processing unit as before.

#### Processing of reproduction control unit 72 for a time search

[0182] The following explanation deals with the case when the user makes a time search operation while reproduction is being performed as described above. In this case, the judgment "Yes" is given in step S143 and the processing advances to step S161 in Fig. 22A. In step S161, a judgment is made as to whether the chapter search key was pressed, which is not the case, so that the processing advances to step S171. In step S171, a judgment is made as to whether the time search key has been pressed, and, since this is the case, the processing advances to step S172. In steps S172, S173, judgments are made to see whether the "sequential single PGC identification" flag and the "no branch" flag are "On", and, if either of these flags is "Off", the processing advances to step S179 where the message "Time search function not available due to interactive reproduction" is displayed, before returning to step S144. As mentioned before, such display is not essential to the operation, and so may be omitted.

[0183] When both flags are "On", in step S174 the system waits for an input from the ten key 911. In step S175, the inputted ten key code is then converted to time format data written as hr:min:sec. After this conversion, the reproduction search unit 72 in step S176 converts the time format data into a VOB number #i and a DSI packet, based on the time map search table. In step S177, the converted VOB number #i is set in the VOB pointer and in step S178, the converted DSI address is set in the block pointer. By setting the pointers in this way, reproduction can be commenced from the reproduction time indicated by the user.

#### Processing of the Reproduction Control Unit 72 for the Chapter Programming function

[0184] The following is an explanation of when a user makes a chapter programming function operation dur-

ing the reproduction of VOBs using the remote controller 91. When such an operation is received by the remote control receiving unit 92, the judgment "Yes" is made in step S143 of Fig. 21B and the processing advances to step S161. In step S161, the judgment as to whether the chapter key has been pressed results in "No", so that the processing advances to S171. In step S171, the time key has not been pressed, so that the judgment "No" is given and the processing advances to step S180. In step S180, the judgment "Yes" is given, so that in steps S181 and S182, the system confirms that the "sequential single PGC identification" flag and the "no branch" flag are both "On".

[0185] Here, if both flags are "On", the processing advances to step S183 where the variable k is set at "1", before the input of a ten key code is made in step S184. Here, the variable k is used to express a value to be added to the plurality of programs which have been confirmed in the schedule list, while the schedule list refers to a list of the programs to be reproduced by the chapter programming function.

[0186] Once a key code has been inputted, the judgment "Yes" is given in step S184 and the processing advances to step S185.

[0187] In step S185, the inputted ten key code #n is converted to a program number #n and in step S186 this program number #n is stored as the kth item in the schedule list. After this, the variable k is incremented by one in step S186 and it is judged in step S188 whether a programming termination code has been issued by the remote controller 91. Here, a programming termination code is a code to terminate numerical input, so that as long as no such code is detected in step S188, the processing in steps S184 to S188 will be repeated. By doing so the first, second, third, and later program numbers are stored in the schedule list. If, having entered the program numbers "1", "3", "5", and "7", the user makes a programming termination operation, the judgment "Yes" will be given in step S188 and the processing will advance to step S189. Steps S189 to S199 are made up of a loop process in which VOBs are read in accordance with the schedule list. In step S189, the variable k and the variable #s showing the block pointer are reset to "1", and in step S190, the first program number #n in the schedule list is converted to an Entry-VOB number #s. Next, this Entry-VOB number #s is set in the VOB pointer and the first address in this Entry-VOB number #s is set in the block pointer, before the logical blocks in this VOB are read by the mechanism control unit and the signal processing unit.

[0188] For the above example, the first program number "1" in the schedule list is converted into a Entry-VOB number #s which is set in the VOB pointer. The first address in this Entry-VOB number #s is set in the block pointer, and the logical blocks in this VOB are read by the mechanism control unit and the signal processing unit.

When the final logical block is indicated by the block

pointer, the judgment "Yes" is given in step S195 and the processing advances to step S198.

[0189] In step S198, it is confirmed that the final VOB of the schedule list is being indicated, and if not, in step S199 the variable k is incremented to indicate a next program number in the schedule list, before the processing returns to step S190.

[0190] After this, the processing in steps S190 to S197 is repeated for all of the remaining program numbers in the schedule list.

#### Processing of the Reproduction Control Unit 72 for the Chapter Programming function

[0191] The following is an explanation of when a user makes a title programming function operation during the reproduction of VOBs using the remote controller 91. When such an operation is received by the remote control receiving unit 92, the judgment "Yes" is made in step S143 of Fig. 21B and the processing advances to step S161. In step S161, the judgment as to whether the chapter key has been pressed results in "No", so that the processing advances to S171. In step S171, the time key has not been pressed, so that the judgment "No" is given and the processing advances to step S180. In step S180, the chapter programming key has not been pressed, so that the judgment "No" is given, and the processing advances to step S200. In step S200, the title programming key has been pressed, so that the judgment "Yes" is given in step 200 and the processing advances to step S201, where the variable s is reset to "1". This variable s is used to express the order of the plurality of titles which are to be reproduced in the schedule list. This schedule list is a list of the titles which are to be reproduced in the specified order. In step S202, the system waits for an input from the ten key.

[0192] Once there has been an input from the ten key, the inputted ten key code #n is converted into a title number #k, and the title playback type #k is read from the title search pointer #k corresponding to this title number #k. Following this, it is judged whether the "sequential single PGC identification" flag is "On" for the reproduction type #k. If this flag is "On" in step S206, the title number #n inputted using the ten key is set as the first item in the schedule list. Following this, the variable s is incremented in step S208 and in step S209, a check is performed to see whether the programming termination code has been inputted, with the processing in steps S202-S209 being repeated until such code is inputted. At such time, the variable k is reset to "1" in step S210, and the first title number #n in the schedule list is read in step S211. In step S212, the VTS number #i and the VTS internal title number #j are read from the title search pointer #n corresponding to the selected title number #n, and in step S213, the title number #j and the Entry-PGC information are read from the title search pointer of the video title set #i indicated by the VTS number #i and are written into the group of state regis-

ters 751. After this, the route processing routine is called with the Entry-PGC information as the

PGC information #k.

[0193] By calling the route processing routine in this way, the processing in the route processing routine can be performed for the Entry-PGC information for the first title number in the schedule list, before a return is performed to the present flowchart. A judgment is then made as to all of the title numbers in the schedule list have been read, and if not, the variable k is incremented to have the next title number read.

[0194] With the disc reproduction apparatus of the present embodiment, an immediate judgment can be made during reproduction execution of an application as to whether emulated AV functions, such as feedback functions including display of a present chapter number and present reproduction time, search functions based on chapter number or reproduction time, a programmed reproduction function using chapter numbers, or a programmed reproduction function using titles, are possible and when not possible, the system can prohibit the function to prevent erroneous operation.

[0195] For the present embodiment, the display of reproduction elapsed time and chapter number during disc reproduction can be linked to titles, so that only valid numbers are displayed. This is to say, display of reproduction time and chapter numbers is only performed where appropriate, so that no display is given for unsuitable titles. In this way, the system does not end up displaying invalid information to the user.

[0196] The present embodiment has described the construction and operation of a low-cost player although it should be obvious that a variety of other types of player, such as professional machines, are also possible, provided that all types of players can detect the differences between species (1) to (5). As described above, low-cost players, which are ideal for home or portable use, have small memories and low processing speeds. Professional machines, however, may be used as network servers, have extremely large memories and high processing speeds.

[0197] Here, there may be differences between players as to the titles for which emulated AV functions may be used. While low-cost players may only perform AV functions for species (1), professional players may perform emulated AV functions for species (1), (4), and (5).

[0198] In the above case, the title search pointer table is composed as shown in Fig. 23. This table includes a first flag showing whether there is only one set of route information, a second flag showing whether there is any loop information, a third flag showing whether there is any automatic branch information, and a fourth flag showing whether there is any interactive branch information. Here, species (1)-(6) can be identified by using these flags to detect the presence of loop information, automatic branches, and interactive branches. Title

playback types are originally formed in this way, although in the present embodiment the "sequential single PGC identification" flag shows whether there is only one set of route information, and the other flags show whether there is any loop information, so that the title playback types are expressed in a format suited to AV devices.

[0199] It is also possible for a flag showing the presence of a certain kind of command (such as commands related to control of a timer) to be provided in the title playback table. The presence of commands which relate to control of a timer makes special kinds of time control possible for the title in question. Such control, however, make a display of reproduction time inappropriate, so that a flag showing its presence needs to be provided.

[0200] The permitted function determination table should not be construed as being limited to a determination of whether a function is possible base on a combination of the functional and structural characteristics of the route information of the title. For example, when a multi-PGC flag and a "no branch" flag are provided, the determination of whether execution is permitted for the time search function and the reproduction time display function can be made when these flags are "On", with the functions being allowed for routes which are made up of a plurality of PGCs but which are sequential with no branches.

[0201] The present embodiment also describes the case where the condition for the setting of the automatic branch flag at "On" is the presence of a branch command for an automatically-performed branch in the PGC command field forming the title, although it may also be set when an automatically executed command is present in a PGC. As one example, a default execution for when there is no user interaction can be set as a button attribute in the Highlight information stored in a VOB, so that the presence of buttons which have default execution attributes can be used as the condition that branch instructions are present.

[0202] In the present embodiment, the condition for the setting of the "no branch between PGCs" flag at "On" was described as being a complete lack of branch information between titles, although if instructions for buttons which are executed due to user interaction are present, this flag may still be set at "On". In this case, titles which include manual branches to other titles will still have the "no branch between PGCs" flag set at "On", so that if the "sequential single PGC identification" flag is "On", the title programming function may still be performed for this title. However, once such a manual branch is performed during reproduction, this will result in the reproduction order in the schedule list no longer being valid, so that the reproduction apparatus needs to perform the invalidation of the remaining title programs in the schedule list.

[0203] The following is another example of the stored content of a multi-title disc. In this example, five episodes of a popular drama series are stored on the disc, as video titles (1) to (5), with a multi-story interactive title

which uses the video information of titles (1) to (5) being stored as video title (6). In this case, image titles (1) to (5) are all sequential single PGC types, so that successive reproduction of (1) to (5) is possible using the title programming function. In this case, the "no branch between titles" flag in the VM internal title search pointer table area is "Off", so that these titles can be reproduced successively in order.

[0204] The VOB position information table of the present invention has been described as a list of storage locations for VOBs, based on which the disc reproduction apparatus reads VOBs, although by storing partial areas of the storage locations of the VOBs in this table, the optical pickup can be made to read only part of the VOBs, such partial reading being known as "trimming". These trimmed parts of VOBs are indicated in units called cells. By doing so, by indicating partial areas in the VOB position information, only part of a VOB is used as a core part, so that the efficiency with which video materials are used can be increased.

[0205] In the present embodiment, a VOB unit consists of one GOP. It is needless to say that if the stored video information has a reproduction time of about a second, a VOB unit may consist of two or three GOPs with a very short reproduction time. In this case, a management information pack is set before such a plurality of consecutive GOPs. The management information pack is then effective for such plurality of GOPs.

[0206] In the present embodiment, digital moving picture data according to MPEG2 standard is used for the moving picture data. However, other kinds of moving picture data, such as the digital moving picture data under MPEG1 or digital moving picture data with a conversion algorithm other than DCT (Discrete Cosine Transform) under MPEG, may be used so long as the moving picture data can be combined with audio data and sub-picture data to form multimedia data.

[0207] In the present embodiment, management information packs are included in VOBUs in units of GOPs, these being the units of reproducing moving picture data. However, it should be obvious that if the method for compressing digital moving pictures changes, the unit of the management information pack changes according to the compression method.

[0208] Finally, a method for producing the optical disc used in the present embodiment is described. The editor prepares master tapes, such as video tapes of various shots filmed with video cameras and music tapes in which songs and sounds are recorded live. The moving pictures and sounds in the tapes are digitized and loaded into a nonlinear editing machine. The editor creates menus and items using application programs, such as a graphic editor provided in an editing machine, and reproduces video and sounds frame by frame. The editor also creates management information packs including Highlight commands using a GUI generator and the like. The editor then encodes the above data under MPEG to create video data, audio data, sub-picture data, and

management information packs. After this, the editor creates VOB units and VOBs using the nonlinear editing machine. The editor also assigns numbers to the VOBs. Also, the editor creates PGC information #1, #2, #3, ..., #n, a VM title search pointer table, and a video manager. The editor then loads these sets of data into the memory of a workstation.

[0209] The data is converted into logical data sequences so that the data is recorded in the file area. The logical data sequences are recorded onto a medium, such as the magnetic tape, then converted to physical data sequences. The physical data sequences include volume data with ECC (Error Check Code), Eight-to-Sixteen conversion, and data in the lead-in area and lead-out area. A master optical disc is produced using the physical data sequences. Then, copies of the master optical disc are manufactured by using a pressing machine.

[0210] Conventional CD manufacturing machines may be used for manufacturing the above-constructed optical disc with the exception of the processes related to the generation of logical data sequences for the data construction of the present invention. These manufacturing methods are described in Heitaro Nakajima and Hiroji Ogawa: "Compact Disc Dokuhon", Ohmu Ltd. and Applied Physics Society Optics Meeting: Optical Disc System, Asakura Shoten.

#### Commercial Applications

[0211] The multimedia optical disc of the present invention can be used for storing both sequential video titles and interactive video titles, and so allows the distribution and retailing of optical titles which on a multi-title disc.

[0212] The reproduction apparatus and method of the present invention allow the reproduction of the above disc by household AV equipment with limited memory capacity.

#### Claims

1. A multimedia optical disc comprising a title area and a manager area, wherein

the title area stores a plurality of video titles, each of which is a video production and each of which include route information and a plurality of pieces of video information retrievable according to the route information, wherein there are three types of video titles which are a first type, a second type, and a third type, with video titles of the first type being retrieved according to only one piece of route information, video titles of the second type being retrieved according to a plurality of pieces of route information and branch information, and

video titles of the third type being retrieved according to a plurality of pieces of route information without branch information,

and wherein the manager area includes:

an address management information area for storing a plurality of pieces of address management information which each include an address of one of the plurality of video titles; characterized by

a playback type information area for storing a plurality of pieces of playback type information, wherein the plurality of pieces of playback type information correspond to the plurality of pieces of address management information, each of the plurality of pieces of playback type information including a first flag and a second flag, of which the first flag indicates whether a corresponding video title is retrieved according to a piece of route information or according to a plurality of pieces of route information, and the second flag indicates whether the route information of the corresponding video title includes the branch information.

2. The multimedia optical disc of Claim 1, wherein

each of the plurality of pieces of playback type information indicates that a disc reproduction apparatus can execute AV functioning for a corresponding video title if the corresponding video title is at least in one of a first case and a second case, wherein in the first case, the first flag indicates that the corresponding video title is retrieved according to only one piece of route information, and in the second case, the second flag indicates that the route information of the corresponding video title does not include the branch information, and

wherein the AV functioning at least includes a search function for allowing the disc reproduction apparatus to search and reproduce an arbitrary portion of a video title and a feedback function for allowing the disc reproduction apparatus to monitor and display a reproduction elapsed time.

3. The multimedia optical disc of Claim 2, wherein

the playback type information includes a third flag which indicates whether all pieces of route information of a corresponding video title are of a normal playback type, wherein the normal playback type is a type in which the plurality of pieces of video information specified by the route information are sequentially reproduced in a predetermined order.

4. The multimedia optical disc of Claim 2, wherein the playback type information includes a fourth flag which indicates whether all pieces of route information of a corresponding video title are of a branch-in-title type, wherein the branch-in-title type is a type in which a current video title does not branch to another video title.

5. The multimedia optical disc of Claim 2, wherein the playback type information includes a fifth flag which indicates whether all pieces of route information of a corresponding video title are of a branch destination auto selection type, wherein the branch destination auto selection type is a type in which a default branch destination is specified for a case when no branch destination has been selected by an operator.

6. The multimedia optical disc of Claim 2,

wherein each of the plurality of pieces of video information includes a plurality of video blocks, wherein each of the plurality of video blocks includes video data and unit time management information, wherein the video data is compressed data of a certain unit time and the unit time management information controls a reproduction during the certain unit time, and wherein the title area includes a plurality of index number tables each including a plurality of index numbers and search destination information that indicates addresses of video blocks respectively corresponding to the plurality of index numbers, wherein the plurality of index number tables correspond to a plurality of pieces of route information of the first type and the second type.

7. The multimedia optical disc of Claim 6,

wherein the plurality of video blocks are arranged in an order of reproduction in a direction of rotation of the multimedia optical disc, and wherein the title area further includes a plurality of time map tables including information indicating a relation between the plurality of video blocks and a plurality of time codes, wherein a time code is displayed by the disc reproduction apparatus when a corresponding video block is reproduced, wherein the plurality of time map tables correspond to a plurality of pieces of route information of the first type and the second type.

8. The multimedia optical disc of Claim 2, wherein the manager area and the title area are formed on a surface of an information layer, wherein the information layer is formed between a first transparent

substrate and a second transparent substrate, each of the first transparent substrate and the second transparent substrate having a thickness range of 0.5mm to 0.7mm.

9. A disc reproduction apparatus for reproducing a multimedia optical disc as defined in claim 1, the multimedia optical disc comprising a title area and a manager area, wherein the title area stores a plurality of video titles, each of which is a video production and each of which include route information and a plurality of pieces of video information retrievable according to the route information, wherein the manager area includes: an address management information area for storing a plurality of pieces of address management information each of which includes an address of one of the plurality of video titles; and a playback type information area for storing a plurality of pieces of playback type information, wherein the plurality of pieces of playback type information correspond to the plurality of pieces of address management information, wherein each of the plurality of pieces of playback type information includes a first flag and a second flag, the first flag indicating whether a corresponding video title is retrievable according to only one piece of route information or according to a plurality of pieces of route information, and the second flag indicating whether the route information of the corresponding video title includes branch information, wherein each of the plurality of pieces of playback type information indicates that the disc reproduction apparatus can execute AV functioning in a corresponding video title when the corresponding video title is at least in one of a first case and a second case, wherein in the first case, the first flag indicates that the corresponding video title is retrievable according to one piece of route information, wherein in the second case, the second flag indicates that the route information of the corresponding video title does not include any branch information, wherein the AV functioning at least includes a search function for allowing the disc reproduction apparatus to search and reproduce an arbitrary portion of the video title and a feedback function for allowing the disc reproduction apparatus to monitor and display a reproduction elapsed time,

the disc reproduction apparatus comprising:

an optical pickup for optically reading data from the multimedia optical disc;  
a drive mechanism for driving the optical pickup;  
first controlling means for controlling the drive mechanism to have the optical position read data from the manager area;  
a manager buffer for storing the data read by the first controlling means;

receiving means for receiving a video title selected by an operator to be reproduced;  
calculating means for calculating an address of the video title selected by the operator by referring to the manager buffer;  
second controlling means for controlling the drive mechanism to move the optical pickup and to have the video title read from a position specified by the address calculated by the calculating means;  
judging means for judging whether the AV functioning can be executed in the video title read by the second controlling means by referring to the first flag and the second flag corresponding to the video title; and  
AV functioning executing means for executing the AV functioning only when the judging means judges that the AV functioning can be used in the video title.

10. The disc reproduction apparatus of Claim 9, wherein the judging means includes:

a search condition table storing unit for storing a search condition table which includes a combination of flag values, the combination of flag values being a condition under which the search function is executed;  
a playback type information fetching unit for fetching a piece of playback type information from the manager buffer corresponding to the video title selected by the operator; and  
a condition comparing unit for comparing a combination of flag values in the piece of playback type information fetched by the playback type information fetching unit with the combination of flag values in the search condition table,

wherein the AV functioning executing means includes:

a search destination receiving unit for generating, on receiving an instruction to execute the search function from the operator, an interrupt request specifying a search destination; and  
a search function executing unit for instructing the second controlling means to change a position of the optical pickup to the search destination only when the combination of flag values in the fetched playback type information matches the combination of flag values in the search condition table.

11. The disc reproduction apparatus of Claim 10, wherein the combination of flag values in the search condition table is one of a first case and a second case, wherein in the first case, the first flag indicates that the corresponding video title is retrieved ac-



49

EP 0 836 189 B1

50

ording to only one piece of route information, wherein in the second case, the second flag indicates that the route information of the corresponding video title does not include any branch information.

12. The disc reproduction apparatus of Claim 11,

wherein the playback type information includes a third flag which indicates whether all pieces of route information of a corresponding video title are of a normal playback type, wherein the normal playback type is a type in which the plurality of pieces of video information specified by the route information are sequentially reproduced in a predetermined order, wherein the combination of flag values in the search condition table is one of a third case and a fourth case, wherein in the third case, the third flag indicates that all pieces of route information of the corresponding video title are of the normal playback type and the first flag indicates that the corresponding video title is retrieved according to only one piece of route information, wherein in the fourth case, the third flag indicates that all pieces of route information of the corresponding video title are of a normal playback type and the second flag indicates that the route information of the corresponding video title does not include any branch information, wherein the condition comparing unit compares the combination of flag values in the piece of playback type information fetched by the playback type information fetching unit with the combination of flag values in the search condition table.

13. The disc reproduction apparatus of Claim 11, wherein the playback type information includes a fourth flag which indicates whether all pieces of route information of a corresponding video title are of a branch destination auto selection type,

wherein the branch destination auto selection type is a type in which a default branch destination is specified when no branch destination has been selected by an operator, wherein the combination of flag values in the search condition table is one of the first case, the second case, and a fifth case, wherein in the fifth case, the fourth flag indicates that all pieces of route information of the corresponding video title are of the branch destination auto selection type, wherein the condition comparing unit compares the combination of flag values in the piece of playback type information fetched by the play-

back type information fetching unit with the combination of flag values in the search condition table.

14. The disc reproduction apparatus of Claim 10, wherein

each of the plurality of pieces of video information includes a plurality of video blocks, wherein each of the plurality of video blocks includes video data and unit time management information, wherein the video data is compressed data of a certain unit time and the unit time management information controls a reproduction during the certain unit time, wherein the title area includes an index number table including a plurality of index numbers and search destination information which indicates addresses of video blocks respectively corresponding to the plurality of index numbers, an index number table corresponds to a piece of route information, wherein the search destination receiving unit, on receiving a numeral input by the operator as an index number, refers to the index number table and determining an address of a video block corresponding to the input index number as the search destination, wherein the search function executing unit instructs the second controlling means to change a position of the optical pickup to the search destination only when the combination of flag values in the fetched playback type information matches the combination of flag values in the search condition table.

15. The disc reproduction apparatus of Claim 14 further comprising:

program start instruction receiving means for receiving from the operator a notification of inputting a plurality of index numbers for a programmed reproduction; holding means for holding a set of index numbers if the search destination receiving unit receives a plurality of numerals from the operator as the set of index numbers after the program start instruction receiving means has received the notification of inputting a plurality of index numbers; and programmed reproduction executing means for activating the search function executing unit as many times as the number of index numbers in the set of index numbers so that the search function executing unit instructs the second controlling means to sequentially change the position of the optical pickup to the search destinations corresponding to the index numbers

51

EP 0 836 189 B1

52

in the set of index numbers.

16. The disc reproduction apparatus of Claim 10, wherein

each of the plurality of pieces of video information includes a plurality of video blocks which are arranged in time series in an order of reproduction, wherein each of the plurality of video blocks includes video data and unit time management information, wherein the video data is compressed data of a certain unit time and the unit time management information controls a reproduction during the certain unit time, wherein the title area includes a plurality of time map tables including information indicating a relation between the plurality of video blocks and a plurality of time codes, wherein a time code is displayed by the disc reproduction apparatus when a corresponding video block is reproduced, wherein the plurality of time map tables correspond to a plurality of pieces of route information of the first type and the second type, wherein the search destination receiving unit for, on receiving a numeral input by the operator as a time code, referring to the time map table and determining an address of a video block corresponding to the input time code as the search destination, wherein the search function executing unit instructs the second controlling means to change a position of the optical pickup to the search destination only when the combination of flag values in the fetched playback type information matches the combination of flag values in the search condition table.

17. The disc reproduction apparatus of Claim 9, wherein the judging means includes:

a feedback condition table storing unit for storing a feedback condition table which includes a combination of flag values, the combination of flag values being a condition under which the search function is executed; a playback type information fetching unit for fetching a piece of playback type information from the manager buffer corresponding to the video title selected by the operator; and a condition comparing unit for comparing a combination of flag values in the piece of playback type information fetched by the playback type information fetching unit with the combination of flag values in the feedback condition table,

wherein the AV functioning executing means

includes:

a monitoring unit for monitoring an amount of progress of the optical pickup which progresses under control of the second controlling unit; a feedback function executing unit for generating display feedback information based on the amount of progress of the optical pickup monitored by the monitoring unit only when the combination of flag values in the fetched playback type information matches the combination of flag values in the feedback condition table; and a displaying unit for displaying the display feedback information generated by the feedback function executing unit.

18. The disc reproduction apparatus of Claim 17, wherein

the combination of flag values in the feedback condition table is one of a first case and a second case, wherein in the first case, the first flag indicates that the corresponding video title is retrieved according to a piece of route information, wherein in the second case, the second flag indicates that the route information of the corresponding video title does not include the branch information.

19. The disc reproduction apparatus of Claim 18,

wherein the playback type information includes a third flag which indicates whether all pieces of route information of a corresponding video title are of a normal playback type, wherein the normal playback type is a type in which the plurality of pieces of video information specified by the route information are sequentially reproduced in a predetermined order, wherein the combination of flag values in the feedback condition table is one of a third case and a fourth case, wherein in the third case, the third flag indicates that all pieces of route information of the corresponding video title are of the normal playback type and the first flag indicates that the corresponding video title is retrieved according to a piece of route information, wherein in the second case, the third flag indicates that all pieces of route information of the corresponding video title are of a normal playback type and the second flag indicates that the route information of the corresponding video title does not include the branch information, wherein the condition comparing unit compares the combination of flag values in the piece of playback type information fetched by the play-

53

EP 0 836 189 B1

54

back type information fetching unit with the combination of flag values in the feedback condition table.

20. The disc reproduction apparatus of Claim 18,

wherein the playback type information includes a fourth flag which indicates whether all pieces of route information of a corresponding video title are of a branch destination auto selection type,

wherein the branch destination auto selection type is a type in which a default branch destination is specified when no branch destination has been selected by an operator,

wherein the combination of flag values in the feedback condition table is one of the first case, the second case, and a fifth case,

wherein in the fifth case, the fourth flag indicates that all pieces of route information of the corresponding video title are of the branch destination auto selection type,

wherein the condition comparing unit compares the combination of flag values in the piece of playback type information fetched by the playback type information fetching unit with the combination of flag values in the feedback condition table.

21. The disc reproduction apparatus of Claim 17,

wherein each of the plurality of pieces of video information includes a plurality of video blocks, wherein each of the plurality of video blocks includes video data and unit time management information, wherein the video data is compressed data of a certain unit time and the unit time management information controls a reproduction during the certain unit time,

wherein the title area includes an index number table including a plurality of index numbers and search destination information which indicates addresses of video blocks respectively corresponding to the plurality of index numbers, wherein the index number table corresponds to a piece of route information,

wherein the monitoring unit monitors an address of a video block read by the optical pickup and refers to the index number table to determine an index number which corresponds to the monitored address,

wherein the feedback function executing unit generates the display feedback information based on the index number determined by the monitoring unit only when the combination of flag values in the fetched playback type information matches the combination of flag values in the feedback condition

table,

wherein the displaying unit displays the display feedback information generated by the feedback function executing unit.

22. The disc reproduction apparatus of Claim 21, wherein each of the plurality of video titles in the multimedia optical disc has an identification number,

wherein the monitoring unit further monitors the identification number of a video title read by the optical pickup,

wherein the feedback function executing unit generates the display feedback information based on the identification number of the video title monitored by the monitoring unit and the index number determined by the monitoring unit when the combination of flag values in the fetched playback type information matches the combination of flag values in the feedback condition table, wherein the feedback function executing unit generates the display feedback information based on only the identification number of the video title monitored by the monitoring unit when the combination of flag values in the fetched playback type information does not match the combination of flag values in the feedback condition table,

wherein the displaying unit displays the display feedback information generated by the feedback function executing unit.

23. The disc reproduction apparatus of Claim 17,

wherein each of the plurality of pieces of video information includes a plurality of video blocks which are arranged in time series in an order of reproduction,

wherein each of the plurality of video blocks includes video data and unit time management information, wherein the video data is compressed data of a certain unit time and the unit time management information controls a reproduction during the certain unit time,

wherein the multimedia optical disc includes a time map table including information indicating a relation between the plurality of video blocks and a plurality of time codes,

wherein a time code is displayed by the disc reproduction apparatus when a corresponding video block is reproduced,

wherein the feedback function executing unit includes:

an initial time code displaying unit for displaying an initial time code with a certain format when the second controlling means starts reading the

55

EP 0 836 189 B1

56

video title;  
a progress monitoring unit for monitoring a video block read by the optical pickup; and  
a time code updating unit for displaying a time code corresponding to the video block monitored by the progress monitoring unit by referring to the time map table, wherein the time code updating unit updates the initial time code first and continues to update as reading of data by the optical pickup progresses.

24. The disc reproduction apparatus of Claim 23, wherein each of the plurality of video titles in the multimedia optical disc has an identification number,

wherein the monitoring unit further monitors the identification number of a video title read by the optical pickup,  
wherein the feedback function executing unit generates the display feedback information based on the identification number of the video title monitored by the monitoring unit and one of the initial time code and the time code displayed by the time code updating unit when the combination of flag values in the fetched playback type information matches the combination of flag values in the feedback condition table, wherein the feedback function executing unit generates the display feedback information based on only the identification number of the video title monitored by the monitoring unit when the combination of flag values in the fetched playback type information does not match the combination of flag values in the feedback condition table,  
wherein the displaying unit displays the display feedback information generated by the feedback function executing unit.

25. The disc reproduction apparatus of Claim 9, wherein

the playback type information includes a fourth flag which indicates whether all pieces of route information of a corresponding video title are of a branch-in-title type,

wherein the branch-in-title type is a type in which a current video title does not branch to another video title,

wherein the disc reproduction apparatus further comprises:

program start instruction receiving means for receiving from the operator a notification of inputting a plurality of index numbers for a programmed reproduction;

title number receiving means for receiving a numeral input by the operator as a title number;  
branch judging means for, every time the title number receiving means receives a title number, judging whether a video title corresponding to the title number received by the title number receiving means branches to another video title by referring to flags in the playback type information of the video title;  
holding means for holding a set of video title numbers corresponding to video titles judged by the branch judging means as not branching to another video title; and  
programmed reproduction executing means for activating the calculating means and the second controlling means as many times as the number of the video title numbers in the set of video title numbers so that the video titles corresponding to the video title numbers in the set of video title numbers are read in sequence.

26. A method, applied to a disc reproduction apparatus including a buffer, of reproducing a multimedia optical disc as defined in claim 1, the multimedia optical disc comprising a plurality of video titles, a plurality of pieces of management information, and a plurality of pieces of playback type information, wherein each of the plurality of video titles includes route information and a plurality of pieces of video information retrievable according to the route information, wherein each of the plurality of pieces of management information manages an address of a corresponding video title, wherein each of the plurality of video titles is a video production, wherein each of the plurality of pieces of playback type information includes a first flag and a second flag, wherein the first flag indicates whether a corresponding video title is retrievable according to only one piece of route information or according to a plurality of pieces of route information, and the second flag indicates whether the route information of the corresponding video title includes branch information, the method comprising:

a first writing step of writing a piece of management information into the buffer;  
a first receiving step of receiving a video title selected by an operator to be reproduced;  
a calculating step of calculating an address of the video title selected by the operator by referring to the buffer;  
a second controlling step of reading the video title from a position specified by the address calculated by the calculating step;  
a judging step of judging whether AV functioning can be executed in the video title read in the second controlling step by referring to the first flag and the second flag corresponding to the

video title, wherein the AV functioning at least includes a search function for allowing the disc reproduction apparatus to search and reproduce an arbitrary portion of the video title and a feedback function for allowing the disc reproduction apparatus to monitor and display a reproduction elapsed time; and an AV functioning executing step of executing the AV functioning only when the judging step judges that the AV functioning can be used in the video title.

# Patentansprüche

1. Optische Multimedia-Platte mit einem Titelbereich und einem Verwaltungsbereich, wobei

der Titelbereich eine Mehrzahl von Videotiteln speichert, von denen jeder eine Videoproduktion ist und von denen jeder Routen-Informationen sowie eine Mehrzahl von Videoinformationen enthält, die entsprechend der Routen-Information zurückladbar sind, wobei es drei Arten von Videotiteln - eine erste, eine zweite und eine dritte Art - gibt, von denen die Videotitel der ersten Art entsprechend nur einer einzigen Routen-Information zurückgeladen werden, die Videotitel der zweiten Art entsprechend einer Mehrzahl von Routen-Informationen und Verzweigungsinformationen zurückgeladen werden und die Videotitel der dritten Art entsprechend einer Mehrzahl von Routen-Informationen ohne Verzweigungsinformation zurückgeladen werden,

und wobei der Verwaltungsbereich umfaßt:

einen Adressenverwaltungs-Informationsbereich zum Speichern einer Mehrzahl von Adressenverwaltungsinformationen, von denen jede eine Adresse von einem aus der Mehrzahl von Videotiteln aufweist,

## gekennzeichnet durch

einen Informationsbereich über die Wiedergabeart zum Speichern einer Mehrzahl von Informationen über die Wiedergabeart, wobei die Mehrzahl der Informationen über die Wiedergabeart der Mehrzahl von Adressenverwaltungsinformationen entspricht, wobei jede aus der Mehrzahl der Informationen über die Wiedergabeart ein erstes Flag und ein zweites Flag aufweist, von denen das erste Flag angibt, ob ein entsprechender Videotitel gemäß einer einzigen Routen-Information oder gemäß einer Mehrzahl von Routen-Informationen zurückge-

laden wird, und das zweite Flag angibt, ob die Routen-Information des entsprechenden Videotitels die Verzweigungsinformation enthält.

2. Optische Multimedia-Platte nach Anspruch 1, wobei

jede aus der Mehrzahl der Informationen über die Wiedergabeart angibt, daß ein Plattenwiedergabegerät die AV-Funktionen für einen entsprechenden Videotitel ausführen kann, wenn der entsprechende Videotitel zumindest entweder dem ersten oder dem zweiten Fall entspricht, wobei im ersten Fall das erste Flag anzeigt, daß der entsprechende Videotitel gemäß nur einer einzigen Routen-Information zurückgeladen wird, und im zweiten Fall das zweite Flag anzeigt, daß die Routen-Information des entsprechenden Videotitels nicht die Verzweigungsinformation enthält, und wobei die AV-Funktion zumindest eine Suchfunktion, mit der das Plattenwiedergabegerät in die Lage versetzt wird, einen willkürlichen Teil eines Videotitels zu suchen und wiederzugeben, und eine Rückmeldungsfunktion aufweist, durch die das Plattenwiedergabegerät in der Lage ist, eine verstrichene Wiedergabezeit zu überwachen und anzuzeigen.

3. Optische Multimedia-Platte nach Anspruch 2, wobei die Information über die Wiedergabeart ein drittes Flag aufweist, das anzeigt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zur normalen Wiedergabeart gehören, wobei die normale Wiedergabeart eine Art ist, bei der die Mehrzahl der Videoinformationen, die durch die Routen-Information angegeben werden, in vorgegebener Reihenfolge nacheinander wiedergegeben werden.

4. Optische Multimedia-Platte nach Anspruch 2, wobei die Information über die Wiedergabeart ein viertes Flag aufweist, welches angibt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zur Branch-In-Titelart gehören, wobei die Branch-In-Titelart eine Art ist, bei der sich ein aktueller Videotitel nicht in einen anderen Videotitel verzweigt.

5. Optische Multimedia-Platte nach Anspruch 2, wobei die Information über die Wiedergabeart ein fünftes Flag aufweist, das angibt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zu der Verzweigungsziel-Selbstwählart gehören, wobei die Verzweigungsziel-Selbstwählart eine Art ist, bei der ein Standard-Verzweigungsziel für den Fall angegeben wird, daß vom Bediener kein Verzweigungsziel ausgewählt wurde.

6. Optische Multimedia-Platte nach Anspruch 2,

wobei jede aus der Mehrzahl der Videoinformationen eine Mehrzahl von Videoblöcken aufweist, wobei jeder aus der Mehrzahl von Videoblöcken Videodaten und Zeitverwaltungs-  
informationen pro Einheit aufweist, wobei die Videodaten komprimierte Daten mit einer bestimmten Zeit pro Einheit sind und die Zeitverwaltungs-  
informationen pro Einheit die Wiedergabe während der speziellen Zeit der Einheit steuert, und wobei der Titelbereich eine Mehrzahl von Indexzahlentabellen aufweist, von denen jede eine Mehrzahl von Indexzahlen und die Suchziel-  
information enthält, welche die Adressen der einzelnen Videoblöcke angibt, die der Mehrzahl der Indexzahlen entsprechen, wobei die Mehrzahl der Indexzahlentabellen einer Mehrzahl von Routen-Informationen der ersten und der zweiten Art entspricht.

7. Optische Multimedia-Platte nach Anspruch 6,

wobei die Mehrzahl der Videoblöcke in einer Wiedergabereihenfolge in Drehrichtung der optischen Multimedia-Platte angeordnet ist und wobei der Titelbereich weiterhin eine Mehrzahl von Zeitzuordnungstabellen mit Informationen über ein Verhältnis zwischen der Mehrzahl von Videoblöcken und einer Mehrzahl von Zeitcodes aufweist, wobei ein Zeitcode von dem Plattenwiedergabegerät angezeigt wird, wenn ein entsprechender Videoblock wiedergegeben wird, wobei die Mehrzahl der Zeitzuordnungstabellen einer Mehrzahl von Routen-Informationen der ersten und der zweiten Art entspricht.

8. Optische Multimedia-Platte nach Anspruch 2, wobei der Verwaltungsbereich und der Titelbereich auf einer Oberfläche einer Informationsschicht ausgebildet sind, wobei die Informationsschicht zwischen einem ersten transparenten Substrat und einem zweiten transparenten Substrat gebildet wird und sowohl das erste als auch das zweite transparente Substrat zwischen 0,5 mm und 0,7 mm dick ist.

9. Plattenwiedergabegerät zur Wiedergabe einer optischen Multimedia-Platte gemäß Definition aus Anspruch 1, wobei die optische Multimedia-Platte einen Titelbereich und einen Verwaltungsbereich umfaßt, wobei der Titelbereich eine Mehrzahl von Videotiteln speichert, von denen jeder eine Videoproduktion ist und von denen jeder Routen-Informationen sowie eine Mehrzahl von Videoinformationen enthält, die entsprechend der Routen-Information zurückladbar sind, wobei der Verwaltungsbereich umfaßt: einen Adressenverwaltungs-Informationen-

bereich zum Speichern einer Mehrzahl von Adressenverwaltungsinformationen, von denen jede eine Adresse eines aus einer Mehrzahl von Videotiteln enthält, und einen Wiedergabeart-Informationsbereich zum Speichern einer Mehrzahl von Informationen über die Wiedergabeart, wobei die Mehrzahl von Wiedergabeart-Informationen der Mehrzahl von Adressenverwaltungsinformationen entspricht, wobei jede aus der Mehrzahl der Wiedergabeart-Informationen ein erstes Flag und ein zweites Flag aufweist, von denen das erste Flag angibt, ob ein entsprechender Videotitel gemäß nur einer einzigen Routen-Information oder gemäß einer Mehrzahl von Routen-Informationen zurückgeladen wird, und das zweite Flag angibt, ob die Routen-Information des entsprechenden Videotitels eine Verzweigungsinformation enthält, wobei jede aus der Mehrzahl der Informationen über die Wiedergabeart anzeigt, daß das Plattenwiedergabegerät die AV-Funktion bei einem entsprechenden Videotitel ausführen kann, wenn der entsprechende Videotitel zumindest entweder dem ersten oder dem zweiten Fall entspricht, wobei im ersten Fall das erste Flag anzeigt, daß der entsprechende Videotitel gemäß nur einer einzigen Routen-Information zurückgeladen wird und im zweiten Fall das zweite Flag anzeigt, daß die Routen-Information des entsprechenden Videotitels keine Verzweigungsinformation enthält, wobei die AV-Funktion zumindest eine Suchfunktion, mit der das Plattenwiedergabegerät in die Lage versetzt wird, einen willkürlichen Teil eines Videotitels zu suchen und wiederzugeben, und eine Rückmeldungsfunktion aufweist, durch die das Plattenwiedergabegerät in der Lage ist, eine verstrichene Wiedergabezeit zu überwachen und anzuzeigen, wobei das Plattenwiedergabegerät umfaßt:

einen optischen Abtaster zum optischen Able-  
sen der Daten von der optischen Multimedia-  
Platte,  
eine Antriebseinrichtung zum Ansteuern des  
optischen Abtasters,  
eine erste Steuereinrichtung zum Steuern der  
Antriebseinrichtung, damit die Positionsdaten  
aus dem Verwaltungsbereich optisch abgele-  
sen werden,  
einen Verwaltungspuffer zum Speichern der  
mit Hilfe der ersten Steuereinrichtung abgele-  
senen Daten,  
eine Empfangseinrichtung zum Empfangen ei-  
nes von einem Bediener ausgewählten Video-  
titels, der wiedergegeben werden soll,  
eine Recheneinrichtung zum Berechnen einer  
Adresse des vom Bediener ausgewählten Vi-  
deotitels durch Bezugnahme auf den Verwal-  
tungspuffer,  
eine zweite Steuereinrichtung zum Steuern der

Antriebseinrichtung, so daß der optische Abtaster bewegt wird und der Videotitel von einer Position abgelesen wird, die von der mittels Recheneinrichtung berechneten Adresse angegeben wird,

eine Beurteilungseinrichtung zum Beurteilen, ob die AV-Funktion bei dem Videotitel ausgeführt werden kann, der von der zweiten Steuerungseinrichtung unter Bezugnahme auf das erste Flag und das zweite Flag, welche dem Videotitel entsprechen, abgelesen wird, und eine Ausführeinrichtung für die AV-Funktion zum Ausführen der AV-Funktion nur dann, wenn die Beurteilungseinrichtung beurteilt, daß die AV-Funktion bei dem Videotitel verwendet werden kann.

10. Plattenwiedergabegerät nach Anspruch 9, wobei die Beurteilungseinrichtung umfaßt:

eine Suchbedingungstabellen-Speichereinheit zum Speichern einer Suchbedingungstabelle, welche eine Kombination von Flag-Werten aufweist, wobei die Kombination der Flag-Werte eine Bedingung ist, unter der die Suchfunktion ausgeführt wird,

eine Abrufeinheit für Wiedergabeart-Informationen zum Abrufen einer Information über die Wiedergabeart für den vom Bediener ausgewählten Videotitel aus dem Verwaltungspuffer und

eine Bedingungsvergleichseinheit zum Vergleichen einer Kombination von Flag-Werten in der Wiedergabeart-Information, die von der Abrufeinheit für Wiedergabeart-Informationen abgerufen wurde, mit der Kombination von Flag-Werten in der Suchbedingungstabelle,

wobei die Ausführeinheit für die AV-Funktion umfaßt:

eine Suchziel-Empfangseinheit zum Erzeugen einer Unterbrechungsanforderung, die ein Suchziel angibt, nachdem vom Bediener ein Befehl zum Ausführen der Suchfunktion eingegangen ist, und

eine Ausführeinheit für die Suchfunktion zum Erteilen eines Befehls an die zweite Steuerungseinrichtung, eine Position des optischen Abtasters nur dann auf das Suchziel zu verlagern, wenn die Kombination von Flag-Werten in der abgerufenen Information über die Wiedergabeart mit der Kombination von Flag-Werten in der Suchbedingungstabelle übereinstimmt.

11. Plattenwiedergabegerät nach Anspruch 10, wobei die Kombination von Flag-Werten in der Suchbedingungstabelle für einen ersten Fall und für einen

zweiten Fall steht, wobei im ersten Fall das erste Flag angibt, daß der entsprechende Videotitel gemäß nur einer einzigen Routen-Information zurückgeladen wird, wobei im zweiten Fall das zweite Flag anzeigt, daß die Routen-Information des entsprechenden Videotitels keine Verzweigungsinformation enthält.

12. Plattenwiedergabegerät nach Anspruch 11,

wobei die Information über die Wiedergabeart ein drittes Flag aufweist, das anzeigt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zur normalen Wiedergabeart gehören,

wobei die normale Wiedergabeart eine Art ist, bei der die Mehrzahl der Videoinformationen, die durch die Routen-Information angegeben werden, in vorgegebener Reihenfolge nacheinander wiedergegeben werden,

wobei es bei der Kombination von Flag-Werten in der Suchbedingungstabelle einen dritten und einen vierten Fall gibt, wobei im dritten Fall das dritte Flag anzeigt, daß alle Routen-Informationen des entsprechenden Videotitels zur normalen Wiedergabeart gehören, und das erste Flag anzeigt, daß der entsprechende Videotitel gemäß nur einer einzigen Routen-Information zurückgeladen wird, wobei im vierten Fall das dritte Flag anzeigt, daß sämtliche Routen-Informationen des entsprechenden Videotitels zur normalen Wiedergabeart gehören, und das zweite Flag anzeigt, daß die Routen-Information des entsprechenden Videotitels keine Verzweigungsinformation enthält, wobei die Bedingungsvergleichseinheit die Kombination der Flag-Werte in der Information über die Wiedergabeart, die von der Abrufeinheit für die Wiedergabeart-Informationen abgerufen wird, mit der Kombination von Flag-Werten in der Suchbedingungstabelle vergleicht.

13. Plattenwiedergabegerät nach Anspruch 11, wobei die Information über die Wiedergabeart ein viertes Flag aufweist, das anzeigt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zur Verzweigungsziel-Selbstwählart gehören,

wobei die Verzweigungsziel-Selbstwählart eine Art ist, bei der ein Standard-Verzweigungsziel für den Fall angegeben wird, daß vom Bediener kein Verzweigungsziel ausgewählt wurde, wobei es bei der Kombination von Flag-Werten in der Suchbedingungstabelle einen ersten Fall, einen zweiten Fall und einen fünften Fall gibt, wobei im fünften Fall das vierte Flag anzeigt, daß sämtliche Routen-Informationen eines entsprechenden Videotitels zur Verzwei-



63

EP 0 836 189 B1

64

gungsziel-Selbstwähler gehören,  
wobei die Bedingungsvergleichseinheit die  
Kombination der Flag-Werte in der Wiederga-  
beart-Information, die von der Abrufeinheit für  
die Wiedergabeart-Informationen abgerufen  
wird, mit der Kombination von Flag-Werten in  
der Suchbedingungstabelle vergleicht.

14. Plattenwiedergabegerät nach Anspruch 10, wobei

jede aus der Mehrzahl der Videoinformationen  
eine Mehrzahl von Videoblöcken aufweist, wo-  
bei jeder aus der Mehrzahl von Videoblöcken  
Videodaten und Zeitverwaltungsinformationen  
pro Einheit aufweist, wobei die Videodaten  
komprimierte Daten mit einer Zeit einer bestim-  
men Einheit sind und die Zeitverwaltungsinfo-  
rmationen der Einheit die Wiedergabe während  
der Zeit der speziellen Einheit steuert, und  
wobei der Titelbereich eine Mehrzahl von In-  
dexzahlentabellen mit einer Mehrzahl von In-  
dexzahlen und einer Suchzielinformation auf-  
weist, welche die Adressen der Videoblöcke  
angibt, die jeweils der Mehrzahl der Indexzah-  
len entsprechen, und eine Indexzahlentabelle  
einer Routen-Information entspricht,  
die Suchziel-Empfangseinheit auf die Index-  
zahlentabelle Bezug nimmt und die Adresse ei-  
nes Videoblockes bestimmt, die der als Such-  
ziel eingegebenen Indexzahl entspricht, nach-  
dem vom Bediener eine Zahl als Suchziel emp-  
fangen wurde,  
wobei die Ausführereinheit für die Suchfunktion  
den Befehl an die zweite Steuereinrichtung er-  
teilt, eine Position des optischen Abtasters nur  
dann auf das Suchziel zu verlagern, wenn die  
Kombination von Flag-Werten in der abgerufe-  
nen Information über die Wiedergabeart mit der  
Kombination von Flag-Werten in der Suchbe-  
dingungstabelle übereinstimmt.

15. Plattenwiedergabegerät nach Anspruch 14, wel-  
ches weiterhin umfaßt:

eine Programmstartbefehl-Empfangseinrich-  
tung zum Empfangen einer Mitteilung des Be-  
dieners über die Eingabe mehrerer Indexzah-  
len zur programmierten Wiedergabe,  
eine Halteeinrichtung zum Halten eines Satzes  
von Indexzahlen, falls die Suchziel-Empfangs-  
einheit vom Bediener eine Mehrzahl von Zah-  
len als Indexzahlensatz erhält, nachdem die  
Programmstartbefehl-Empfangseinrichtung  
die Mitteilung über die Eingabe mehrerer In-  
dexzahlen erhalten hat, und  
eine Ausführereinrichtung für die programmierte  
Wiedergabe zum Aktivieren der Suchfunktion-  
Ausführereinheit so oft, wie durch die Anzahl der

Indexzahlen im Indexzahlensatz angegeben,  
so daß die Suchfunktion-Ausführereinheit den  
Befehl an die zweite Steuereinrichtung ausgibt,  
nacheinander die Position des optischen Abta-  
sters auf die Suchziele entsprechend den In-  
dexzahlen im Indexzahlensatz zu verlagern.

16. Plattenwiedergabegerät nach Anspruch 10, wobei

jede aus der Mehrzahl von Videoinformationen  
eine Mehrzahl von Videoblöcken aufweist, die  
in der Reihenfolge ihrer zeitlichen Wiedergabe  
angeordnet sind, wobei jeder aus der Mehrzahl  
von Videoblöcken Videodaten und Zeitverwal-  
tungsinformationen pro Einheit enthält, wobei  
die Videodaten komprimierte Daten der Zeit für  
eine bestimmte Einheit sind und die Zeitverwal-  
tungsinformation die Wiedergabe während der  
Zeit der speziellen Einheit steuert,  
wobei der Titelbereich eine Mehrzahl von Zeit-  
zuordnungstabellen mit Informationen umfaßt,  
die ein Verhältnis zwischen der Mehrzahl von  
Videoblöcken und einer Mehrzahl von Zeitco-  
des angeben,  
wobei ein Zeitcode vom Plattenwiedergabege-  
rät angezeigt wird, wenn ein entsprechender  
Videoblock wiedergegeben wird,  
wobei die Mehrzahl der Zeitzuordnungstabel-  
len einer Mehrzahl von Routen-Informationen  
der ersten und der zweiten Art entspricht,  
wobei die Suchziel-Empfangseinheit zur Be-  
zugnahme auf die Zeitzuordnungstabelle und  
zum Festlegen einer Adresse eines Videoblok-  
kes, der dem als Suchziel eingegebenen Zeit-  
code entspricht, nachdem vom Bediener eine  
Zahl als Zeitcode eingegeben wurde,  
wobei die Suchfunktions-Ausführereinheit den  
Befehl an die zweite Steuereinrichtung ausgibt,  
eine Position des optischen Abtasters nur dann  
auf das Suchziel zu verlagern, wenn die Kom-  
bination von Flag-Werten in der abgerufenen  
Information mit der Wiedergabeart zu der Kom-  
bination von Flag-Werten in der Suchbedin-  
gungstabelle übereinstimmt.

17. Plattenwiedergabegerät nach Anspruch 9, wobei  
die Beurteilungseinrichtung umfaßt:

eine Speichereinheit für eine Rückmeldungs-  
bedingungstabelle zum Speichern einer Rück-  
meldungsbedingungstabelle, welche eine  
Kombination von Flag-Werten aufweist, wobei  
die Kombination von Flag-Werten eine Bedin-  
gung darstellt, unter der die Suchfunktion aus-  
geführt wird,  
eine Abrufeinheit für die Wiedergabeart-Infor-  
mation zum Abrufen einer Information über die  
Wiedergabeart aus dem Verwaltungspuffer, die

65

EP 0 836 189 B1

66

dem vom Bediener ausgewählten Videotitel entspricht, und  
eine Bedingungsvergleichseinheit zum Vergleichen einer Kombination von Flag-Werten in der Information über die Wiedergabeart, welche

wobei die Ausführereinrichtung für die AV-Funktion aufweist:

eine Überwachungseinheit zur Fortschrittsüberwachung des optischen Abtasters, der von der zweiten Steuereinrichtung gesteuert fortschreitet,  
eine Ausführereinheit für die Rückmeldungsfunktion zum Erzeugen einer Rückmeldungs-Anzeigeeinformation, ausgehend von dem Betrag des Fortschritts des von der Überwachungseinheit überwachten optischen Abtasters, nur dann, wenn die Kombination von Flag-Werten in der abgerufenen Wiedergabeart-Information mit der Kombination von Flag-Werten in der Rückmeldungsbedingungstabelle übereinstimmt, und  
eine Anzeigeeinheit zum Anzeigen der Rückmeldungs-Anzeigeeinformation, die von der Ausführereinheit für die Rückmeldungsfunktion erzeugt wird.

#### 18. Plattenwiedergabegerät nach Anspruch 17, wobei

die Kombination von Flag-Werten in der Rückmeldungsbedingungstabelle zu einem ersten Fall und einem zweiten Fall gehört, wobei im ersten Fall das erste Flag anzeigt, daß der entsprechende Videotitel gemäß nur einer einzigen Routen-Information zurückgeladen wird und im zweiten Fall das zweite Flag anzeigt, daß die Routen-Information des entsprechenden Videotitels nicht die Verzweigungsinformation enthält.

#### 19. Plattenwiedergabegerät nach Anspruch 18,

wobei die Information über die Wiedergabeart ein drittes Flag aufweist, das anzeigt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zur normalen Wiedergabeart gehören,  
wobei die normale Wiedergabeart eine Art ist, bei der die Mehrzahl der Videoinformationen, die durch die Routen-Information angegeben werden, in vorgegebener Reihenfolge nacheinander wiedergegeben werden,  
wobei die Kombination von Flag-Werten in der

Rückmeldungsbedingungstabelle einen dritten und einen vierten Fall darstellen, wobei im dritten Fall das dritte Flag anzeigt, daß alle Routen-Informationen des entsprechenden Videotitels zur normalen Wiedergabeart gehören, und das erste Flag anzeigt, daß der entsprechende Videotitel gemäß einer Routen-Information wiederaufgefunden wird, wobei im zweiten Fall das dritte Flag anzeigt, daß sämtliche Routen-Informationen des entsprechenden Videotitels zur normalen Wiedergabeart gehören und das zweite Flag anzeigt, daß die Routen-Information des entsprechenden Videotitels die Verzweigungsinformation nicht enthält,

wobei die Bedingungsvergleichseinheit die Kombination der Flag-Werte in der Information über die Wiedergabeart, die von der Abrufeinheit für die Wiedergabeart-Informationen abgerufen wird, mit der Kombination von Flag-Werten in der Rückmeldungsbedingungstabelle vergleicht.

#### 20. Plattenwiedergabegerät nach Anspruch 18,

wobei die Information über die Wiedergabeart ein viertes Flag aufweist, welches angibt, ob sämtliche Routen-Informationen eines entsprechenden Videotitels zu der Verzweigungsziel-Selbstwählart gehören,  
wobei die Verzweigungsziel-Selbstwählart eine Art ist, bei der ein Standard Verzweigungsziel für den Fall angegeben wird, daß vom Bediener kein Verzweigungsziel ausgewählt wurde,  
wobei die Kombination von Flag-Werten in der Rückmeldungsbedingungstabelle einen ersten Fall, einen zweiten Fall und einen fünften Fall darstellt,  
wobei im fünften Fall das vierte Flag anzeigt, daß sämtliche Routen-Informationen des entsprechenden Videotitels zur Verzweigungsziel-Selbstwählart gehören,  
wobei die Bedingungsvergleichseinheit die Kombination der Flag-Werte in der Information über die Wiedergabeart, die von der Abrufeinheit für die Wiedergabeart-Informationen abgerufen wird, mit der Kombination von Flag-Werten in der Rückmeldungsbedingungstabelle vergleicht.

#### 21. Plattenwiedergabegerät nach Anspruch 17,

wobei jede aus der Mehrzahl der Videoinformationen eine Mehrzahl von Videoblöcken aufweist, wobei jeder aus der Mehrzahl von Videoblöcken Videodaten und Zeitverwaltungsinformationen pro Einheit aufweist, wobei die Videodaten komprimierte Daten mit einer bestimmen

67

EP 0 836 189 B1

68

Zeit pro Einheit sind und die Zeitverwaltungs-  
informationen pro Einheit während der Zeit der  
speziellen Einheit die Wiedergabe steuert, und  
wobei der Titelbereich eine Indexzahlentabelle  
mit einer Mehrzahl von Indexzahlen und einer  
Suchzielinformation aufweist, welche die  
Adressen der Videoblöcke angibt, die jeweils  
der Mehrzahl der Indexzahlen entsprechen,  
wobei die Indexzahlentabelle einer Routen-In-  
formation entspricht,  
wobei die Überwachungseinheit eine Adresse  
eines vom optischen Abtaster abgelesenen Vi-  
deoblockes überwacht und auf die Indexzah-  
lentabelle zugreift, um eine Indexzahl zu ermit-  
teln, die der überwachten Adresse entspricht,  
wobei die Ausführereinheit für die Rückmel-  
dungsfunktion die Rückmeldungs-Anzeigeein-  
formation erzeugt, ausgehend von der von der  
Überwachungseinheit ermittelten Indexzahl  
nur dann, wenn die Kombination von Flag-Wer-  
ten in der abgerufenen Wiedergabeart-Infor-  
mation mit der Kombination von Flag-Werten in  
der Rückmeldungsbedingungstabelle überein-  
stimmt,  
wobei die Anzeigeeinheit die Rückmeldungs-  
Anzeigeeinformation anzeigt, die von der Aus-  
führeinheit für die Rückmeldungs-funktion er-  
zeugt wird.

22. Plattenwiedergabegerät nach Anspruch 21,

wobei jeder aus der Mehrzahl von Videotiteln  
in der optischen Multimedia-Platte eine Kenn-  
ziffer hat,  
wobei die Überwachungseinheit weiterhin die  
Kennziffer eines von dem optischen Abtaster  
gelesenen Videotitels überwacht,  
wobei die Ausführereinheit für die Rückmel-  
dungsfunktion die Rückmeldungs-Anzeigeein-  
formation ausgehend von der Kennziffer des  
von der Überwachungseinheit überwachten Vi-  
deotitels und von der durch die Überwachungs-  
einheit ermittelten Indexzahl erzeugt, wenn die  
Kombination von Flag-Werten in der abgerufe-  
nen Wiedergabeart-Information mit der Kombi-  
nation von Flag-Werten in der Rückmeldungs-  
bedingungstabelle übereinstimmt, wobei die  
Ausführeinheit für die Rückmeldungs-funktion  
die Rückmeldungs-Anzeigeeinformation ledig-  
lich auf der Grundlage der von der Überwa-  
chungseinheit überwachten Kennziffer des Vi-  
deotitels erzeugt, wenn die Kombination von  
Flag-Werten in der abgerufenen Wiedergabe-  
art-Information nicht mit der Kombination von  
Flag-Werten in der Rückmeldungsbedingungs-  
tabelle übereinstimmt,  
wobei die Anzeigeeinheit die Rückmeldungs-  
Anzeigeeinformation anzeigt, die von der Aus-

führeinheit für die Rückmeldungs-funktion er-  
zeugt wird.

23. Plattenwiedergabegerät nach Anspruch 17,

wobei jede aus der Mehrzahl von Videoinfor-  
mationen eine Mehrzahl von Videoblöcken auf-  
weist, die in der Reihenfolge ihrer zeitlichen  
Wiedergabe angeordnet sind,  
wobei jeder aus der Mehrzahl von Videoblök-  
ken Videodaten und Zeitverwaltungsinforma-  
tionen pro Einheit enthält, wobei die Videoda-  
ten komprimierte Daten der Zeit für eine be-  
stimmte Einheit sind und die Zeitverwaltungs-  
information die Wiedergabe während der Zeit  
der speziellen Einheit steuert,  
wobei die optische Multimedia-Platte eine Zeit-  
zuordnungstabelle mit Informationen umfaßt,  
die ein Verhältnis zwischen der Mehrzahl von  
Videoblöcken und einer Mehrzahl von Zeitco-  
des angeben,  
wobei ein Zeitcode vom Plattenwiedergabege-  
rät angezeigt wird, wenn ein entsprechender  
Videoblock wiedergegeben wird,  
wobei die Ausführereinheit für die Rückmel-  
dungsfunktion umfaßt:  
eine Anzeigeeinheit für den Anfangszeitcode  
zum Anzeigen eines Anfangszeitcodes mit ei-  
nem bestimmten Format, wenn die zweite  
Steuereinrichtung mit dem Lesen des Videoti-  
tels anfängt,  
eine Fortschrittsüberwachungseinheit zum  
Überwachen eines von dem optischen Abtaster  
eingelassenen Videoblocks und  
eine Zeitcode-Fortschreibungseinheit zum An-  
zeigen eines Zeitcodes, der dem Videoblock  
entspricht, der von der Fortschrittsüberwa-  
chungseinheit durch Vergleich mit der Zeitzu-  
ordnungstabelle überwacht wird, wobei die  
Zeitcode-Fortschreibungseinheit zuerst den  
Anfangszeitcode fortschreibt und dann weiter-  
hin aktualisiert, während das Lesen der Daten  
mit dem optischen Abtaster fortschreitet.

24. Plattenwiedergabegerät nach Anspruch 23,

wobei jeder aus der Mehrzahl von Videotiteln  
auf der optischen Multimedia-Platte eine Kenn-  
ziffer hat,  
wobei die Überwachungseinheit zudem die  
Kennziffer eines Videotitels überwacht, der  
vom optischen Abtaster eingelesen wird,  
wobei die Ausführereinheit für die Rückmel-  
dungsfunktion die Rückmeldungs-Anzeigeein-  
formation erzeugt, ausgehend von der von der  
Überwachungseinheit überwachten Kennziffer  
des Videotitels und einem Anfangszeitcode  
und dem Zeitcode, der von der Zeitcode-Fort-

schreibungseinheit angezeigt wird, wenn die Kombination von Flag-Werten in der abgerufenen Information über die Wiedergabeart mit der Kombination von Flag-Werten in der Rückmel-  
dungsbedingungstabelle übereinstimmt, wobei die Ausführungseinheit für die Rückmel-  
dungsfunktion die Rückmeldungs-Anzeigein-  
formation lediglich auf der Grundlage der von  
der Überwachungseinheit überwachten Kenn-  
ziffer des Videotitels erzeugt, wenn die Kombi-  
nation von Flag-Werten in der abgerufenen In-  
formation über die Wiedergabeart nicht mit der  
Kombination von Flag-Werten in der Rückmel-  
dungsbedingungstabelle übereinstimmt,  
wobei die Anzeigeeinheit die von der Ausführ-  
einheit für die Rückmeldungs-funktion erzeugte  
Rückmeldungs-Anzeigeinformation anzeigt.

25. Plattenwiedergabegerät nach Anspruch 9, wobei

die Information über die Wiedergabeart ein  
viertes Flag aufweist, welches angibt, ob sämt-  
liche Routen-Informationen eines entspre-  
chenden Videotitels zur Branch-In-Titelart ge-  
hören,  
wobei die Branch-In-Titelart eine Art ist, bei der  
ein aktueller Videotitel nicht in einen anderen  
Videotitel verzweigt,

wobei das Plattenwiedergabegerät zudem umfaßt:

eine Programmstartbefehl-Empfangseinrich-  
tung zum Empfangen einer Mitteilung des Be-  
dieners über die Eingabe mehrerer Indexzah-  
len zur programmierten Wiedergabe,  
eine Titelanzahl-Empfangseinrichtung zum  
Empfangen einer Zahleneingabe als Titelan-  
zahl durch den Bediener,  
eine Verzweigungs-Beurteilungseinrichtung,  
mit der immer dann, wenn die Titelanzahl-Emp-  
fangseinrichtung eine Titelnzahl erhält, beurteilt  
wird, ob ein Videotitel, welcher der von der Ti-  
telanzahl-Empfangseinrichtung empfangenen  
Titelnzahl entspricht, in einen anderen Videotitel  
verzweigt, indem auf Flags in der Information  
über die Wiedergabeart Bezug genommen  
wird,  
eine Halteeinrichtung zum Halten eines Satzes  
von Videotitelzahlen, die Videotiteln entspre-  
chen, über die die Verzweigungs-Beurteilungs-  
einrichtung die Beurteilung getroffen hat, daß  
sie nicht in einen anderen Videotitel verzwei-  
gen, und  
eine Ausführungseinrichtung für die programmierte  
Wiedergabe zum Aktivieren der Rechenein-  
richtung und der zweiten Steuereinrichtung so  
oft, wie durch die Anzahl der Videotitelzahlen  
im Videotitelzahlensatz angegeben, damit die

Videotitel, welche den Videotitelzahlen im Vi-  
deotitelzahlensatz entsprechen, nacheinander  
gelesen werden.

26. Verfahren, welches bei einem Plattenwiedergabe-  
gerät mit Puffer angewandt wird, zur Wiedergabe  
einer optischen Multimedia-Platte gemäß Definition  
aus Anspruch 1, wobei die optische Multimedia-  
Platte eine Mehrzahl von Videotiteln, eine Mehrzahl  
von Verwaltungsinformationen und eine Mehrzahl  
von Informationen über die Wiedergabeart umfaßt,  
wobei jeder aus der Mehrzahl von Videotiteln eine  
Routen-Informationen und eine Mehrzahl von Vi-  
deoinformationen aufweist, die entsprechend der  
Routen-Information zurückladbar sind, wobei jede  
aus der Mehrzahl von Verwaltungsinformationen ei-  
ne Adresse eines entsprechenden Videotitels ver-  
waltet, wobei jeder aus der Mehrzahl der Videotitel  
eine Videoproduktion ist, wobei jede aus der Mehr-  
zahl der Informationen über die Wiedergabeart ein  
erstes Flag und ein zweites Flag aufweist, wobei  
das erste Flag angibt, ob ein entsprechender Video-  
titel gemäß nur einer einzigen Routen-Information  
oder gemäß einer Mehrzahl von Routen-Info-  
mationen zurückladbar ist, und das zweite Flag angibt,  
ob die Routen-Information des entsprechenden Vi-  
deotitels eine Verzweigungsinformation enthält,  
wobei das Verfahren umfaßt: einen ersten Schreib-  
schritt, bei dem eine Verwaltungsinformation in den  
Puffer geschrieben wird,

einen ersten Empfangsschritt, bei dem ein Vi-  
deotitel empfangen wird, der von einem Bedie-  
ner zur Wiedergabe ausgewählt wurde,  
einen Berechnungsschritt zum Berechnen ei-  
ner Adresse des vom Bediener ausgewählten  
Videotitels durch Zugriff auf den Puffer,  
einen zweiten Steuerschritt zum Ablesen des  
Videotitels von einer Position, die von der im  
Berechnungsschritt berechneten Adresse an-  
gegeben wird,  
einen Beurteilungsschritt, in dem beurteilt wird,  
ob die AV-Funktion bei dem im zweiten Steuer-  
schritt abgelesenen Videotitel ausgeführt wer-  
den kann, indem auf das dem Videotitel ent-  
sprechende erste Flag und zweite Flag Bezug  
genommen wird, wobei die AV-Funktion zumin-  
dest eine Suchfunktion, welche das Plattenwie-  
dergabegerät in die Lage versetzt, einen will-  
kürlichen Teil des Videotitels zu suchen und  
wiederzugeben, und eine Rückmeldungsfun-  
ktion aufweist, die es dem Plattenwiedergabe-  
gerät gestattet, eine verstrichene Wiedergabe-  
zeit zu überwachen und anzuzeigen, und  
einen Ausführungsschritt für die AV-Funktion zum  
Ausführen der AV-Funktion nur dann, wenn im  
Beurteilungsschritt eingeschätzt wird, daß die  
AV-Funktion bei dem Videotitel verwendet wer-

71

EP 0 836 189 B1

72

den kann.

## Revendications

1. Disque optique multimédia comprenant une zone de titre et une zone de gestionnaire, où :

la zone de titre stocke une pluralité de titres vidéo dont chacun est une production vidéo et dont chacun comprend des informations d'acheminement et une pluralité d'éléments d'informations vidéo récupérables selon les informations d'acheminement, où il y a trois types de titres vidéo qui sont d'un premier type, d'un second type, et d'un troisième type, avec des titres vidéo du premier type étant récupérés selon seulement un élément d'informations d'acheminement, des titres vidéo du second type étant récupérés selon une pluralité d'éléments d'informations d'acheminement et d'informations de branche, et des titres vidéo du troisième type étant récupérés selon une pluralité d'éléments d'informations d'acheminement sans informations de branche,

et où la zone de gestionnaire comprend :

une zone d'informations de gestion d'adresse pour stocker une pluralité d'éléments d'informations de gestion d'adresse qui comprennent chacun une adresse d'une de la pluralité des titres vidéo ; caractérisé par une zone d'informations de type de lecture pour stocker une pluralité d'éléments d'informations de type de lecture, où la pluralité d'éléments d'informations de type de lecture correspond à la pluralité d'éléments d'informations de gestion d'adresse, chacun de la pluralité des éléments d'informations de type de lecture comprenant un premier indicateur et un second indicateur, dont le premier indicateur indique si un titre vidéo correspondant est récupéré selon un élément des informations d'acheminement ou selon une pluralité d'éléments d'informations d'acheminement, et le second indicateur indique si les informations d'acheminement du titre vidéo correspondant comprennent des informations de branche.

2. Disque optique multimédia selon la revendication 1, où

chacun de la pluralité des éléments d'informations de type de lecture indique qu'un appareil de reproduction de disque peut exécuter un fonctionnement audiovisuel pour un titre vidéo

correspondant si le titre vidéo correspondant est au moins un d'un premier cas et d'un second cas, où dans le premier cas, le premier indicateur indique que le titre vidéo correspondant est récupéré selon seulement un élément des informations d'acheminement, et dans le second cas, le second indicateur indique que les informations d'acheminement du titre vidéo correspondant ne comprennent pas les informations de branche, et où le fonctionnement audiovisuel comprend au moins une fonction de recherche pour permettre à l'appareil de reproduction de disque de rechercher et de reproduire une partie arbitraire d'un titre vidéo et une fonction de rétroaction pour permettre à l'appareil de reproduction de disque de contrôler et d'afficher un temps écoulé de reproduction.

3. Disque optique multimédia selon la revendication 2, où

les informations de type de lecture comprennent un troisième indicateur qui indique si tous les éléments d'informations d'acheminement d'un titre vidéo correspondant sont d'un type de lecture normal, où le type de lecture normal est un type dans lequel la pluralité d'éléments d'informations vidéo spécifiés par les informations d'acheminement sont séquentiellement reproduits dans un ordre prédéterminé.

4. Disque optique multimédia selon la revendication 2, où les informations de type de lecture comprennent un quatrième indicateur qui indique si tous les éléments d'informations d'acheminement d'un titre vidéo correspondant sont d'un type de branche dans un titre, où le type de branche dans un titre est un type dans lequel un titre vidéo actuel ne branche pas un autre titre vidéo.

5. Disque optique multimédia selon la revendication 2, où les informations de type de lecture comprennent un cinquième indicateur qui indique si tous les éléments d'informations d'acheminement d'un titre vidéo correspondant sont d'un type de sélection automatique de destination de branche, où le type de sélection automatique de destination de branche est un type dans lequel une destination de branche défectueuse est spécifiée pour un cas où aucune destination de branche n'a été sélectionnée par un opérateur.

6. Disque optique multimédia selon la revendication 2,

où chacun de la pluralité des éléments d'informations vidéo comprend une pluralité de blocs vidéo, où chacun de la pluralité de blocs vidéo

73

EP 0 836 189 B1

74

comprend des données vidéo et des informations de gestion de temps d'unité, où les données vidéo sont des données compressées d'un certain temps d'unité et les informations de gestion de temps d'unité commandent une reproduction pendant un certain temps d'unité, et

où la zone de titre comprend une pluralité de tables de numéro d'index comprenant chacun une pluralité de numéros d'index et des informations de destination de recherche qui indiquent des adresses de blocs vidéo respectivement correspondant à la pluralité de numéros d'index, où la pluralité de tables de numéro d'index correspond à une pluralité d'éléments d'informations d'acheminement du premier type et du second type.

7. Disque optique multimédia selon la revendication 6,

où la pluralité de blocs vidéo sont disposés dans un ordre de reproduction dans une direction de rotation du disque optique multimédia, et

où la zone de titre comprend en outre une pluralité de tables de carte de temps comprenant des informations indiquant une relation entre la pluralité de blocs vidéo et une pluralité de codes de temps, où un code de temps est affiché par l'appareil de reproduction de disque lorsqu'un bloc de données vidéo correspondant est reproduit, où la pluralité de tables de carte de temps correspond à une pluralité d'éléments d'informations d'acheminement du premier type et du second type.

8. Disque optique multimédia selon la revendication 2, où la zone de gestionnaire et la zone de titre sont formées sur une surface d'une couche d'informations, où la couche d'informations est formée entre un premier substrat transparent et un second substrat transparent, chacun du premier substrat transparent et du second substrat transparent ayant une gamme d'épaisseur de 0,5 mm à 0,7 mm.

9. Appareil de reproduction de disque pour reproduire un disque optique multimédia tel que défini selon la revendication 1, le disque optique multimédia comprenant une zone de titre et une zone de gestionnaire, où la zone de titre stocke une pluralité de titres vidéo, dont chacun est une production vidéo et qui comprennent chacun des informations d'acheminement et une pluralité d'éléments d'informations vidéo récupérables selon les informations d'acheminement, où la zone de gestionnaire comprend : une zone d'informations de gestion d'adresse pour stocker une pluralité d'éléments d'informations de gestion d'adresse qui comprennent chacun une

adresse d'une de la pluralité des titres vidéo ; et une zone d'informations de type de lecture pour stocker une pluralité d'éléments d'informations de type de lecture, où la pluralité d'éléments d'informations de type de lecture correspond à la pluralité d'éléments d'informations de gestion d'adresse, où chacun de la pluralité des éléments d'informations de type de lecture comprend un premier indicateur et un second indicateur, le premier indicateur indiquant si un titre vidéo correspondant est récupérable selon seulement un élément d'informations d'acheminement ou selon une pluralité d'éléments d'informations d'acheminement, et le second indicateur indiquant si les informations d'acheminement du titre vidéo correspondant comprennent des informations de branche, où chacun de la pluralité des éléments d'informations de type de lecture indique que l'appareil de reproduction de disque peut exécuter un fonctionnement audiovisuel dans un titre vidéo correspondant lorsque le titre vidéo correspondant est au moins un d'un premier cas et d'un second cas, où dans le premier cas, le premier indicateur indique que le titre vidéo correspondant est récupérable selon un élément des informations d'acheminement, où dans le second cas, le second indicateur indique que les informations d'acheminement du titre vidéo correspondant ne comprennent aucune informations de branche, où le fonctionnement audiovisuel comprend au moins une fonction de recherche, pour permettre à l'appareil de reproduction de disque de rechercher et de reproduire une partie arbitraire du titre vidéo et une fonction de rétroaction pour permettre à l'appareil de reproduction de disque de contrôler et d'afficher un temps écoulé de reproduction,

l'appareil de reproduction de disque comprenant :

une tête de lecture optique pour lire optiquement des données à partir du disque optique multimédia ; un mécanisme d'entraînement pour entraîner la tête de lecture optique ; un premier moyen de commande pour commander le mécanisme d'entraînement pour avoir les données de lecture de position optique à partir de la zone de gestionnaire ; un tampon de gestionnaire pour stocker les données lues par le premier moyen de commande ; un moyen de réception pour recevoir un titre vidéo sélectionné par un opérateur pour être reproduit ; un moyen de calcul pour calculer une adresse du titre vidéo sélectionné par l'opérateur en se référant au tampon de gestionnaire ; un second moyen de commande pour commander le mécanisme d'entraînement pour déplacer la tête de lecture optique pour avoir le



75

EP 0 836 189 B1

76

titre vidéo lu à partir d'une position spécifiée par l'adresse calculée par le moyen de calcul ; un moyen de test pour tester si le fonctionnement audiovisuel peut être exécuté dans le titre vidéo lu par le second moyen de commande en se référant au premier indicateur et au second indicateur correspondant au titre vidéo ; et un moyen d'exécution de fonctionnement audiovisuel pour exécuter le fonctionnement audiovisuel seulement lorsque le moyen de test teste que le fonctionnement audiovisuel peut être utilisé dans le titre vidéo.

10. Appareil de reproduction de disque selon la revendication 9, où le moyen de test comprend :

une unité de stockage table de condition de recherche pour stocker une table de condition de recherche qui comprend une combinaison des valeurs d'indicateur, la combinaison de valeurs d'indicateur étant une condition dans laquelle la fonction de recherche est exécutée ; une unité de recherche d'informations de type de lecture pour rechercher un élément d'informations de type de lecture à partir du tampon de gestionnaire correspondant au titre vidéo sélectionné par l'opérateur ; et une unité de comparaison de condition pour comparer une combinaison des valeurs d'indicateur dans l'élément d'informations de type de lecture recherché par l'unité de recherche d'informations de type de lecture avec la combinaison des valeurs d'indicateur dans la table de condition de recherche,

où le moyen d'exécution de fonctionnement audiovisuel comprend :

une unité de réception de destination de recherche pour générer, lors de la réception d'une instruction pour exécuter la fonction de recherche de l'opérateur, une demande d'interruption spécifiant une destination de recherche ; et une unité d'exécution de fonction de recherche pour donner l'instruction au second moyen de commande de changer une position de la tête de lecture optique à la destination de recherche seulement lorsque la combinaison des valeurs d'indicateur dans les informations de type de lecture recherchées correspond à la combinaison des valeurs d'indicateur dans la table de condition de recherche.

11. Appareil de reproduction de disque selon la revendication 10, où la combinaison des valeurs d'indicateur dans la table de condition de recherche est un d'un premier cas et d'un second cas, où dans le

premier cas, le premier indicateur indique que le titre vidéo correspondant est récupéré selon seulement un élément des informations d'acheminement, où dans le second cas, le second indicateur indique que les informations d'acheminement du titre vidéo correspondant ne comprennent aucune informations de branche.

12. Appareil de reproduction selon la revendication 11,

où les informations de type de lecture comprennent un troisième indicateur qui indique si tous les éléments d'informations d'acheminement d'un titre vidéo correspondant sont d'un type de lecture normal, où le type de lecture normal est un type dans lequel la pluralité d'éléments d'informations vidéo spécifiés par les informations d'acheminement sont séquentiellement reproduites dans un ordre prédéterminé, où la combinaison des valeurs d'indicateur dans la table de condition de recherche est un d'un troisième cas et d'un quatrième cas, où dans le troisième cas, le troisième indicateur indique que tous les éléments d'informations d'acheminement du titre vidéo correspondant sont du type de lecture normal et le premier indicateur indique que le titre vidéo correspondant est récupéré selon seulement un élément des informations d'acheminement, où dans le quatrième cas, le troisième indicateur indique que tous les éléments d'informations d'acheminement du titre vidéo correspondant sont d'un type de lecture normal et le second indicateur indique que les informations d'acheminement du titre vidéo correspondant ne comprennent aucune informations de branche, où l'unité de comparaison de condition compare la combinaison des valeurs d'indicateur dans l'élément des informations de type de lecture recherchées par l'unité de recherche d'informations de type de lecture avec la combinaison des valeurs d'indicateur dans la table de condition de recherche.

13. Appareil de reproduction de disque selon la revendication 11, où les informations de type de lecture comprennent un quatrième indicateur qui indique si tous les éléments d'informations d'acheminement d'un titre vidéo correspondant sont d'un type de sélection automatique de destination de branche,

où le type de sélection automatique de destination de branche est un type dans lequel une destination de branche défectueuse est spécifiée lorsque aucune destination de branche n'a été sélectionnée par un opérateur, où la combinaison des valeurs d'indicateur

77

EP 0 836 189 B1

78

dans la table de condition de recherche est un du premier cas, du second cas, et du cinquième cas, où dans le cinquième cas, le quatrième indicateur indique que tous les éléments d'informations d'acheminement du titre vidéo correspondant sont du type de sélection automatique de destination de branche, où l'unité de comparaison de condition compare la combinaison des valeurs d'indicateur dans l'élément des informations de type de lecture recherchées par l'unité de recherche d'informations de type de lecture avec la combinaison des valeurs d'indicateur dans la table de condition de recherche.

14. Appareil de reproduction de disque selon la revendication 10, où

chacun de la pluralité des éléments d'informations vidéo comprend une pluralité de blocs vidéo, où chacun de la pluralité de blocs vidéo comprend des données vidéo et des informations de gestion de temps d'unité, où les données vidéo sont des données compressées d'un certain temps d'unité et les informations de gestion de temps d'unité commandent une reproduction pendant un certain temps d'unité, où la zone de titre comprend une table de numéro d'index comprenant une pluralité de numéros d'index et des informations de destination de recherche qui indiquent des adresses des blocs vidéo correspondant respectivement à la pluralité de numéros d'index, une table de numéro d'index correspond à un élément des informations d'acheminement; où l'unité de réception de destination de recherche, lors de la réception d'un numéro introduit par l'opérateur comme numéro d'index, se réfère à la table de numéro d'index et détermine une adresse d'un bloc vidéo correspondant au numéro d'index introduit comme destination de recherche, où l'unité d'exécution de la fonction de recherche donne l'instruction au second moyen de commande de changer une position de la tête de lecture optique à la destination de recherche seulement lorsque la combinaison des valeurs d'indicateur dans les informations de type de lecture recherchées correspond à la combinaison des valeurs d'indicateur dans la table de condition de recherche.

15. Appareil de reproduction de disque selon la revendication 14 comprenant en outre :

un moyen de réception d'instruction de début de programme pour recevoir de l'opérateur une notification d'introduction d'une pluralité de nu-

méros d'index pour une reproduction programmée ; un moyen de maintien pour maintenir un jeu de numéros d'index si l'unité de réception de destination de recherche reçoit une pluralité de numéros de l'opérateur comme jeu de numéros d'index après que le moyen de réception d'instruction de début de programme ait reçu la notification d'introduction d'une pluralité de numéros d'index ; et un moyen d'exécution de reproduction programmée pour activer l'unité d'exécution de fonction de recherche autant de fois que le nombre de numéros d'index dans le jeu de numéros d'index pour que l'unité d'exécution de fonction de recherche donne l'instruction au second moyen de commande de changer séquentiellement la position de la tête de lecture optique aux destinations de recherche correspondant aux numéros d'index dans le jeu de numéros d'index.

16. Appareil de reproduction de disque selon la revendication 10, où

chacun de la pluralité des éléments d'informations vidéo comprend une pluralité de blocs vidéo qui sont disposés dans des séries temporelles dans un ordre de reproduction, où chacun de la pluralité de blocs vidéo comprend des données vidéo et des informations de gestion de temps d'unité, où les données vidéo sont des données compressées d'un certain temps d'unité et les informations de gestion de temps d'unité commandent une reproduction pendant un certain temps d'unité, où la zone de titre comprend une pluralité de tables de carte de temps comprenant des informations indiquant une relation entre la pluralité de blocs vidéo et une pluralité de codes de temps, où un code de temps est affiché par l'appareil de reproduction de disque lorsqu'un bloc vidéo correspondant est reproduit, où la pluralité de tables de carte de temps correspond à une pluralité d'éléments d'informations d'acheminement du premier type et du second type, où l'unité de réception de destination de recherche, lors de la réception d'un numéro introduit par l'opérateur comme code de temps, se réfère à la table de carte de temps et détermine une adresse d'un bloc vidéo correspondant au code de temps d'introduction comme destination de recherche, où l'unité d'exécution de fonction de recherche donne l'instruction au second moyen de commande de changer une position de la tête de

79

EP 0 836 189 B1

80

lecture optique à la destination de recherche  
seulement lorsque la combinaison des valeurs  
d'indicateur dans les informations de type de  
lecture recherchées correspond à la combinai-  
son des valeurs d'indicateur dans la table de  
condition de recherche.

17. Appareil de reproduction de disque selon la reven-  
dication 9, où le moyen de test comprend :

une unité de stockage de table de condition de  
rétroaction pour stocker une table de condition  
de rétroaction qui comprend une combinaison  
des valeurs d'indicateur, la combinaison des  
valeurs d'indicateur étant une condition dans  
laquelle la fonction de recherche est exécutée ;  
une unité de recherche d'informations de type  
de lecture pour rechercher un élément des in-  
formations de type de lecture à partir du tampon  
de gestionnaire correspondant au titre vidéo  
sélectionné par l'opérateur ; et  
une unité de comparaison de condition pour  
comparer une combinaison des valeurs d'indi-  
cateur dans l'élément des informations de type  
de recherche recherchés par l'unité de recher-  
che d'informations de type de lecture avec la  
combinaison des valeurs d'indicateur dans la  
table de condition de rétroaction,

où le moyen d'exécution de fonctionnement  
audiovisuel comprend :

une unité de contrôle pour contrôler une quan-  
tité d'avancement de la tête de lecture optique  
qui progresse sous la commande de la secon-  
de unité de commande ;  
une unité d'exécution de fonction de rétroaction  
pour générer des informations de rétroaction  
d'affichage sur la base de la quantité d'avance-  
ment de la tête de lecture optique contrôlée par  
l'unité de contrôle seulement lorsque la combi-  
naison des valeurs d'indicateur dans les infor-  
mations de type de lecture recherchées corres-  
pond à la combinaison des valeurs d'indicateur  
dans la table de condition de rétroaction ; et  
une unité d'affichage pour afficher les infor-  
mations de rétroaction d'affichage générées par  
l'unité d'exécution de fonction de rétroaction.

18. Appareil de reproduction de disque selon la reven-  
dication 17, où :

la combinaison des valeurs d'indicateur dans la  
table de condition de rétroaction est une du pre-  
mier cas et d'un second cas, où dans le premier  
cas, le premier indicateur indique que le titre  
vidéo correspondant est récupéré selon un élé-  
ment des informations d'acheminement, où

dans le second cas, le second indicateur indi-  
que que les informations d'acheminement du  
titre vidéo correspondant ne comprennent pas  
les informations de branche.

19. Appareil de reproduction de disque selon la reven-  
dication 18,

où les informations de type de lecture compren-  
nent un troisième indicateur qui indique si tous  
les éléments d'informations d'acheminement  
d'un titre vidéo correspondant sont d'un type de  
lecture normal,  
où le type de lecture normal est un type dans  
lequel la pluralité d'éléments d'informations vi-  
déo spécifiés par les informations d'achemine-  
ment sont séquentiellement reproduits dans un  
ordre prédéterminé,  
où la combinaison de valeurs d'indicateur dans  
la table de condition de rétroaction est un d'un  
troisième cas et d'un quatrième cas, où dans le  
troisième cas, le troisième indicateur indique  
que tous les éléments d'informations d'achemi-  
nement du titre vidéo correspondant sont du ty-  
pe de lecture normal et le premier indicateur in-  
dique que le titre vidéo correspondant est récu-  
péré selon un élément des informations d'ache-  
minement, où dans le second cas, le troisième  
indicateur indique que tous les éléments d'in-  
formations d'acheminement du titre vidéo cor-  
respondant sont d'un type de lecture normal et  
le second indicateur indique que les infor-  
mations d'acheminement du titre vidéo correspon-  
dant ne comprennent pas les informations de  
branche,  
où l'unité de comparaison de destination com-  
pare la combinaison des valeurs d'indicateur  
dans l'élément des informations de type de lec-  
ture recherché par l'unité de recherche d'infor-  
mations de type de lecture avec la combinaison  
des valeurs d'indicateur dans la table de con-  
dition de rétroaction.

20. Appareil de reproduction de disque selon la reven-  
dication 18,

où les informations de type de lecture compren-  
nent un quatrième indicateur qui indique si tous  
les éléments d'informations d'acheminement  
d'un titre vidéo correspondant sont d'un type de  
sélection automatique de destination de bran-  
che,  
où le type de sélection automatique de destina-  
tion de branche est un type dans lequel une  
destination de branche défectueuse est spéci-  
fiée lorsque aucune destination de branche n'a  
été sélectionnée par un opérateur,  
où la combinaison des valeurs d'indicateur

81

EP 0 836 189 B1

82

dans la table de condition de rétroaction est un du premier cas, du second cas, et du cinquième cas,

où dans le cinquième cas, le quatrième indicateur indique que tous les éléments d'informations d'acheminement du titre vidéo correspondant sont du type de sélection automatique de destination de branche,

où l'unité de comparaison de condition compare la combinaison des valeurs d'indicateur dans l'élément d'informations de type de lecture recherché par l'unité de recherche d'informations du type de lecture avec la combinaison des valeurs d'indicateur dans la table de condition de rétroaction.

## 21. Appareil de reproduction de disque selon la revendication 17,

où chacun de la pluralité des éléments d'informations vidéo comprend une pluralité de blocs vidéo, où chacun de la pluralité de blocs vidéo comprend des données vidéo et des informations de gestion de temps d'unité, où les données vidéo sont des données compressées d'un certain temps d'unité et les informations de gestion de temps d'unité commandent une reproduction pendant un certain temps d'unité, où la zone de titre comprend une table de numéro d'index comprenant une pluralité de numéros d'index et les informations de destination de recherche qui indiquent les adresses des blocs vidéo correspondant respectivement à la pluralité de numéros d'index, où la table de numéro d'index correspond à un élément des informations d'acheminement,

où l'unité de contrôle, contrôle une adresse d'un bloc vidéo lu par la tête de lecture optique et se réfère à la table de numéro d'index pour déterminer un numéro d'index qui correspond à l'adresse contrôlée,

où l'unité d'exécution de fonction de rétroaction génère les informations de rétroaction d'affichage sur la base du numéro d'index déterminé par l'unité de contrôle seulement lorsque la combinaison des valeurs d'indicateur dans les informations de type de lecture recherchées correspond à la combinaison des valeurs d'indicateur dans la table de condition de rétroaction,

où l'unité d'affichage affiche les informations de rétroaction d'affichage générées par l'unité d'exécution de fonction de rétroaction.

## 22. Appareil de reproduction de disque selon la revendication 21, où chacun de la pluralité des titres vidéo dans le disque optique multimédia a un numéro d'identification,

où l'unité de contrôle, contrôle en outre le numéro d'identification d'un titre vidéo lu par la tête de lecture optique,

où l'unité d'exécution de fonction de rétroaction génère les informations de rétroaction d'affichage sur la base du numéro d'identification du titre vidéo contrôlé par l'unité de contrôle et le numéro d'index déterminé par l'unité de contrôle lorsque la combinaison des valeurs d'indicateur dans les informations de type de lecture recherchées correspond à la combinaison des valeurs d'indicateur dans la table de condition de rétroaction, où l'unité d'exécution de fonction de rétroaction génère les informations de rétroaction d'affichage sur la base seulement du numéro d'identification du titre vidéo contrôlé par l'unité de contrôle lorsque la combinaison des valeurs d'indicateur dans les informations du type de lecture recherchées ne correspond pas à la combinaison des valeurs d'indicateur dans la table de condition de rétroaction, où l'unité d'affichage affiche les informations de rétroaction d'affichage générées par l'unité d'exécution de fonction de rétroaction.

## 23. Appareil de reproduction de disque selon la revendication 17,

où chacun de la pluralité des éléments d'informations vidéo comprend une pluralité de blocs vidéo qui sont disposés dans des séries temporelles dans un ordre de reproduction,

où chacun de la pluralité de blocs vidéo comprend des données vidéo et des informations de gestion de temps d'unité, où les données vidéo sont des données compressées d'un certain temps d'unité et les informations de gestion de temps d'unité commandent une reproduction pendant un certain temps d'unité,

où le disque optique multimédia comprend une table de carte de temps comprenant des informations indiquant une relation entre la pluralité de blocs vidéo et une pluralité de codes de temps,

où un code de temps est affiché par l'appareil de reproduction de disque lorsqu'un bloc vidéo correspondant est reproduit,

où l'unité d'exécution de fonction de rétroaction comprend :

une unité d'affichage de code de temps initial pour afficher un code de temps initial avec un certain format lorsque le second moyen de commande commence la lecture du titre vidéo ; une unité de contrôle d'avancement pour contrôler un bloc vidéo lu par la tête de lecture optique ; et



85

EP 0 836 189 B1

86

une première étape de réception de réception  
d'un titre vidéo sélectionné par un opérateur à  
reproduire ;

une étape de calcul du calcul d'une adresse du  
titre vidéo sélectionné par un opérateur en se 5  
référant au tampon ;

une seconde étape de contrôle de lecture du  
titre vidéo à partir d'une position spécifiée par  
l'adresse calculée par l'étape de calcul ;

une étape de test pour tester si un fonctionne- 10  
ment audiovisuel peut être exécuté dans le titre  
vidéo lu dans la seconde étape de commande  
en se référant au premier indicateur et au se-  
cond indicateur correspondant au titre vidéo,

où le fonctionnement audiovisuel comprend au 15  
moins une fonction de recherche pour permet-  
tre à l'appareil de reproduction de disque de re-  
chercher et de reproduire une partie arbitraire  
du titre vidéo et une fonction de rétroaction pour  
permettre à l'appareil de reproduction de dis- 20  
que de contrôler et d'afficher un temps écoulé  
de reproduction ; et

une étape d'exécution de fonctionnement  
audiovisuel d'exécution du fonctionnement 25  
audiovisuel seulement lorsqu'une étape de test  
teste que le fonctionnement audiovisuel peut  
être utilisé dans le titre vidéo.

30

35

40

45


50

55



EP 0 836 189 B1

FIG. 1

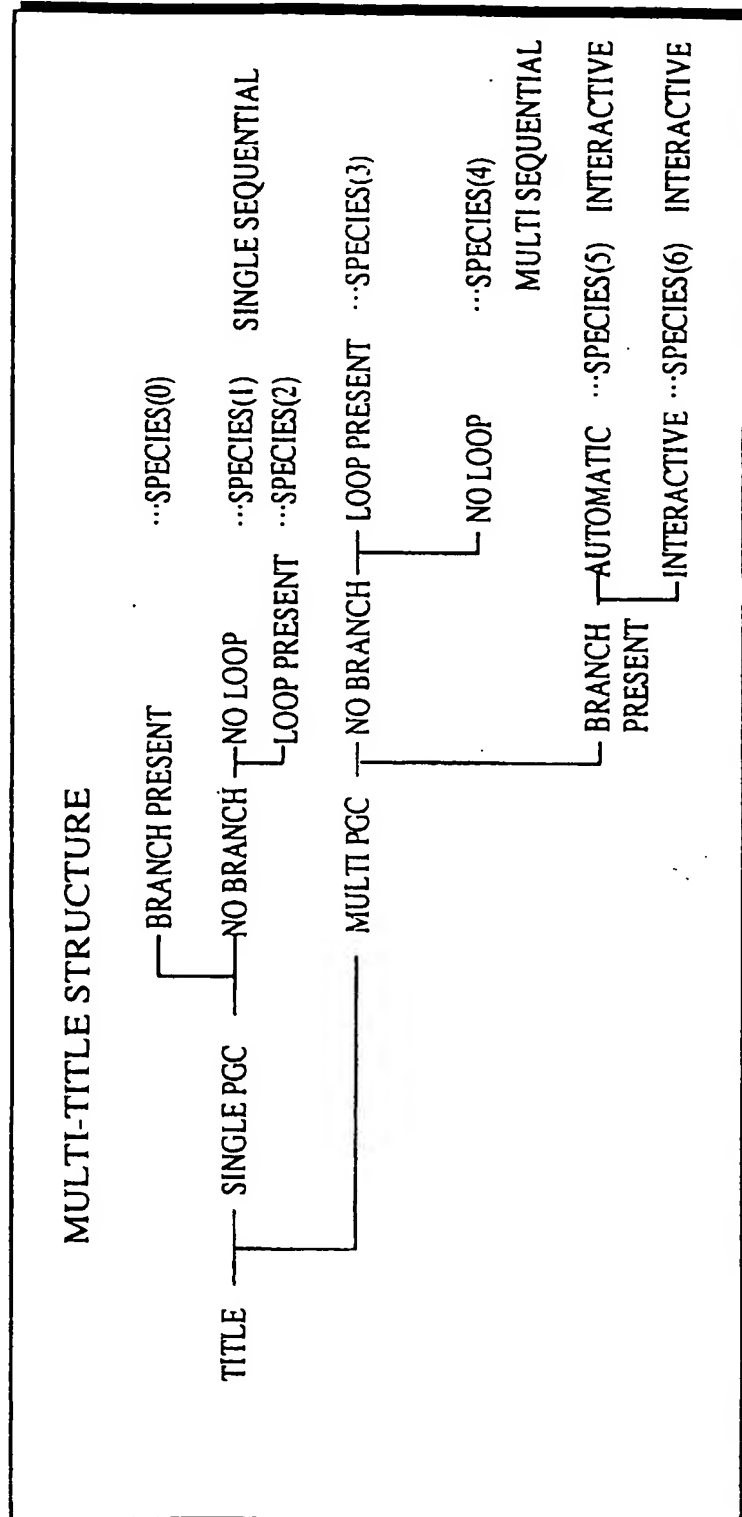

EP 0 836 189 B1

FIG. 2A




FIG. 2B

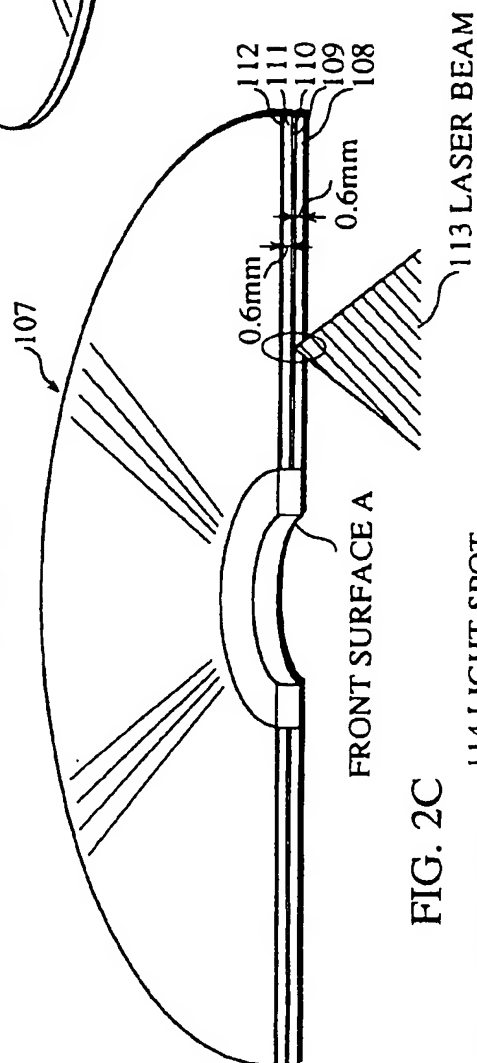


FIG. 2D


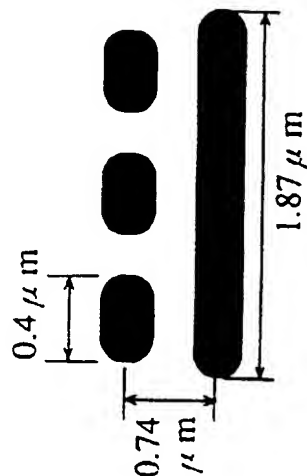


FIG. 2C

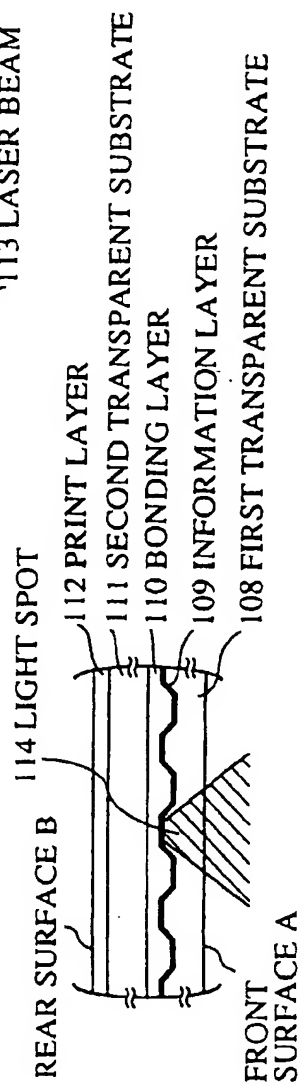

EP 0 836 189 B1

FIG. 3A



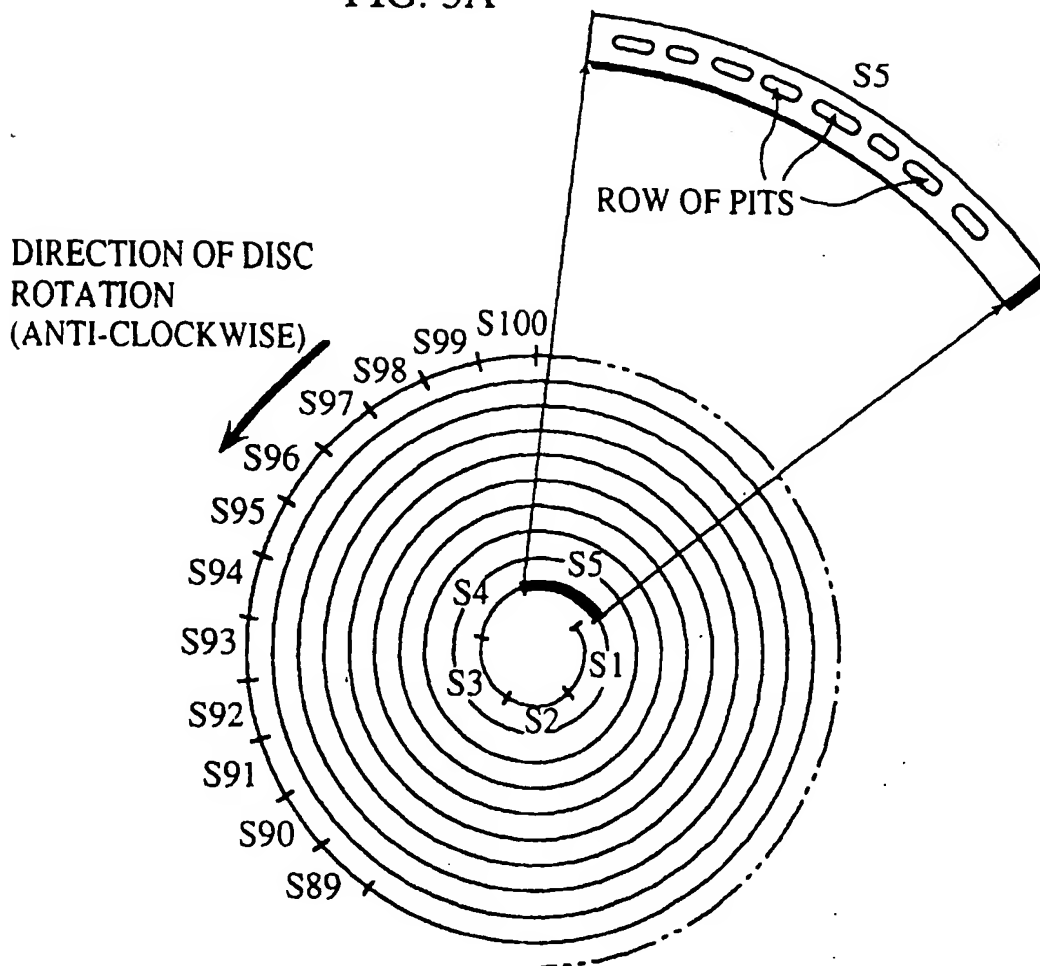


FIG. 3B

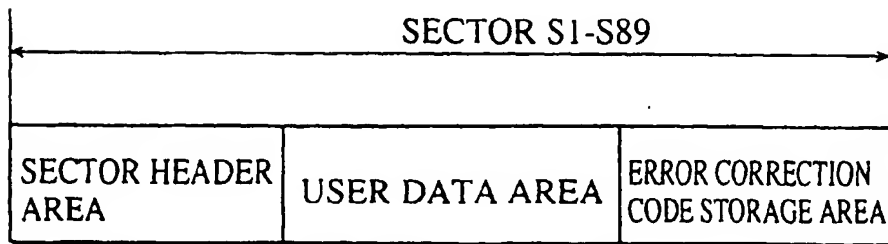


EP 0 836 189 B1

FIG. 4A

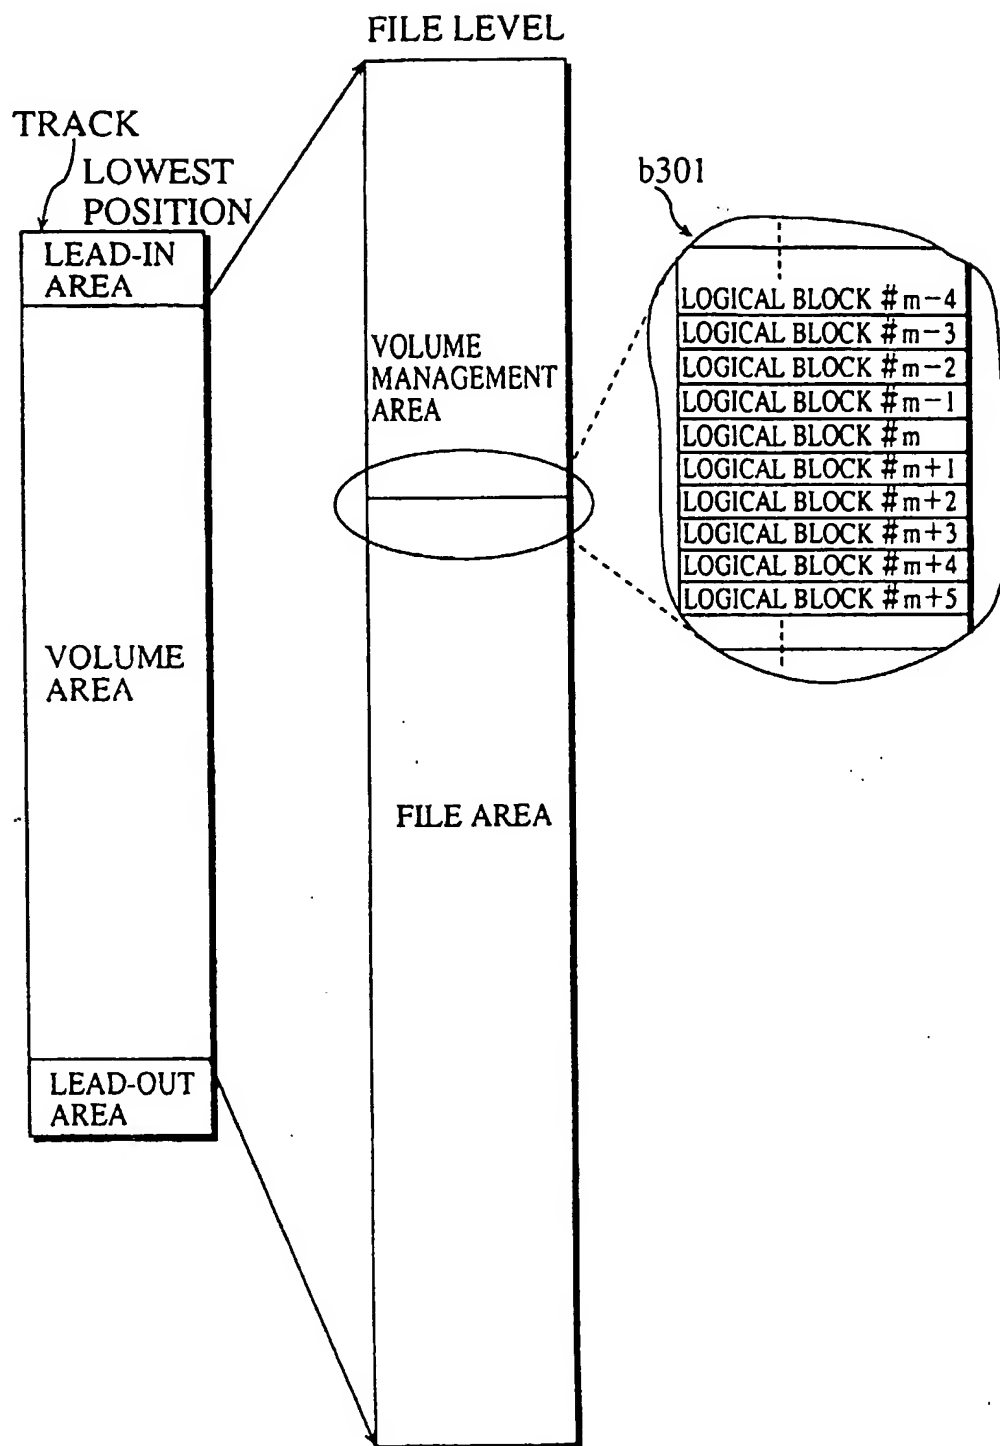

EP 0 836 189 B1

FIG. 4B

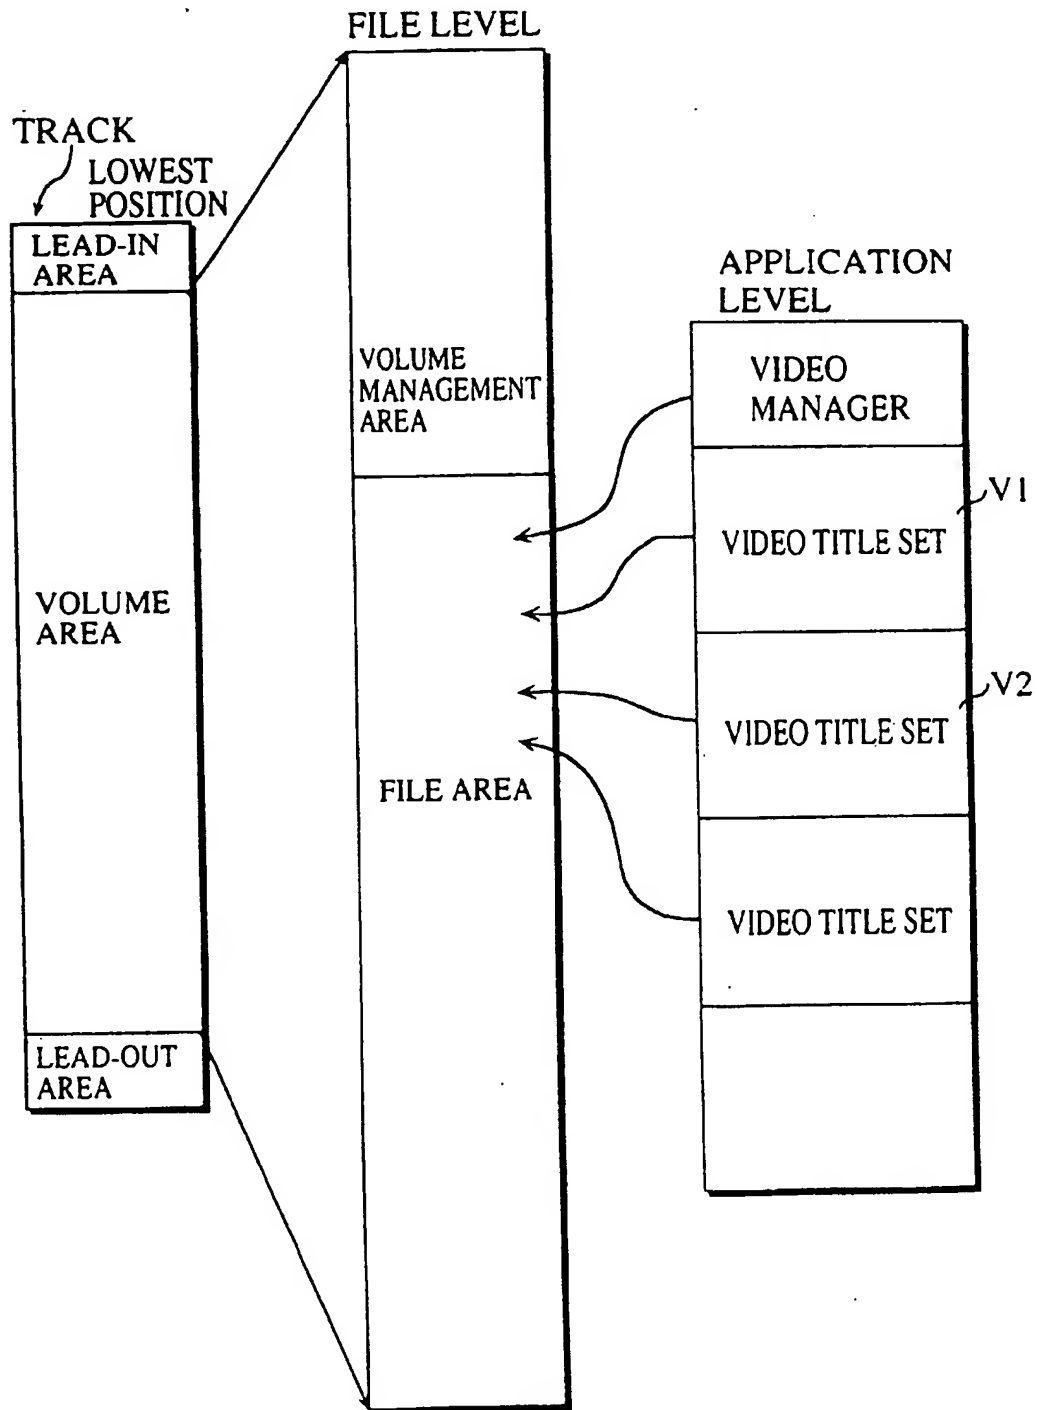

EP 0 836 189 B1


FIG. 5A

VIDEO TITLE SET VI

VIDEO TITLE SET MANAGEMENT INFORMATION	
VOB # 1(10min.)	OPENING SCENE WITH SCROLLING CREDITS SHOWING DIRECTOR, PRODUCER, STUDIO NAME, AND CAST
VOB # 2(50sec.)	SCENE WITH MAIN CHARACTER WALKING AROUND DOUTOMBORI AREA
VOB # 3(8min.)	SCENE WHERE MAIN CHARACTER PASSES BY A SUSPICIOUS CHARACTER
VOB # 4(48sec.)	SCENE SHOWING MEETING AT HEAD OFFICE OF TRADING COMPANY A
VOB # 5(13min.)	SCENE SHOWING TOP SECRET PROJECT OF TRADING COMPANY A
VOB # 6(45sec.)	SCENE SHOWING EMPLOYEE B CHUCKLING AFTER HEARING CONTENT OF THE TOP SECRET PROJECT
VOB # 7(16min.)	SCENE AT THE FRONT GATE OF THE FACTORY OF CAR MANUFACTURER C
VOB # 8(59sec.)	SCENE WHERE THE NEW CAR AT THE CENTER OF THE TOP SECRET PROJECT IS REVEALED IN ITS ENTIRETY

GROUP OF  
VIDEO  
MATERIALS


EP 0 836 189 B1

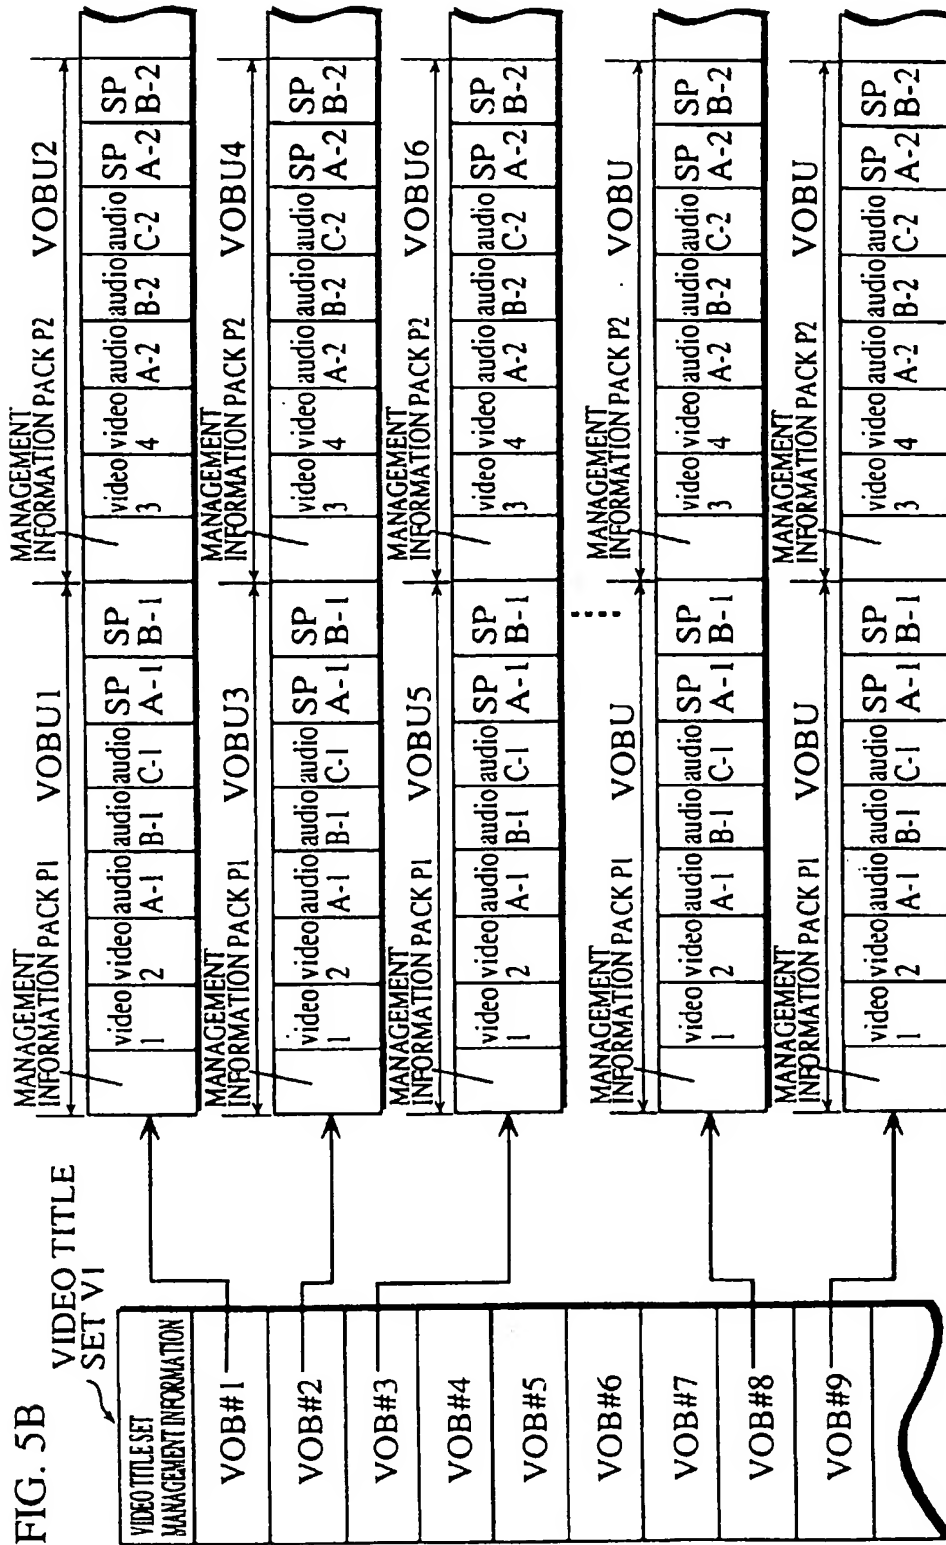




EP 0 836 189 B1

FIG. 6

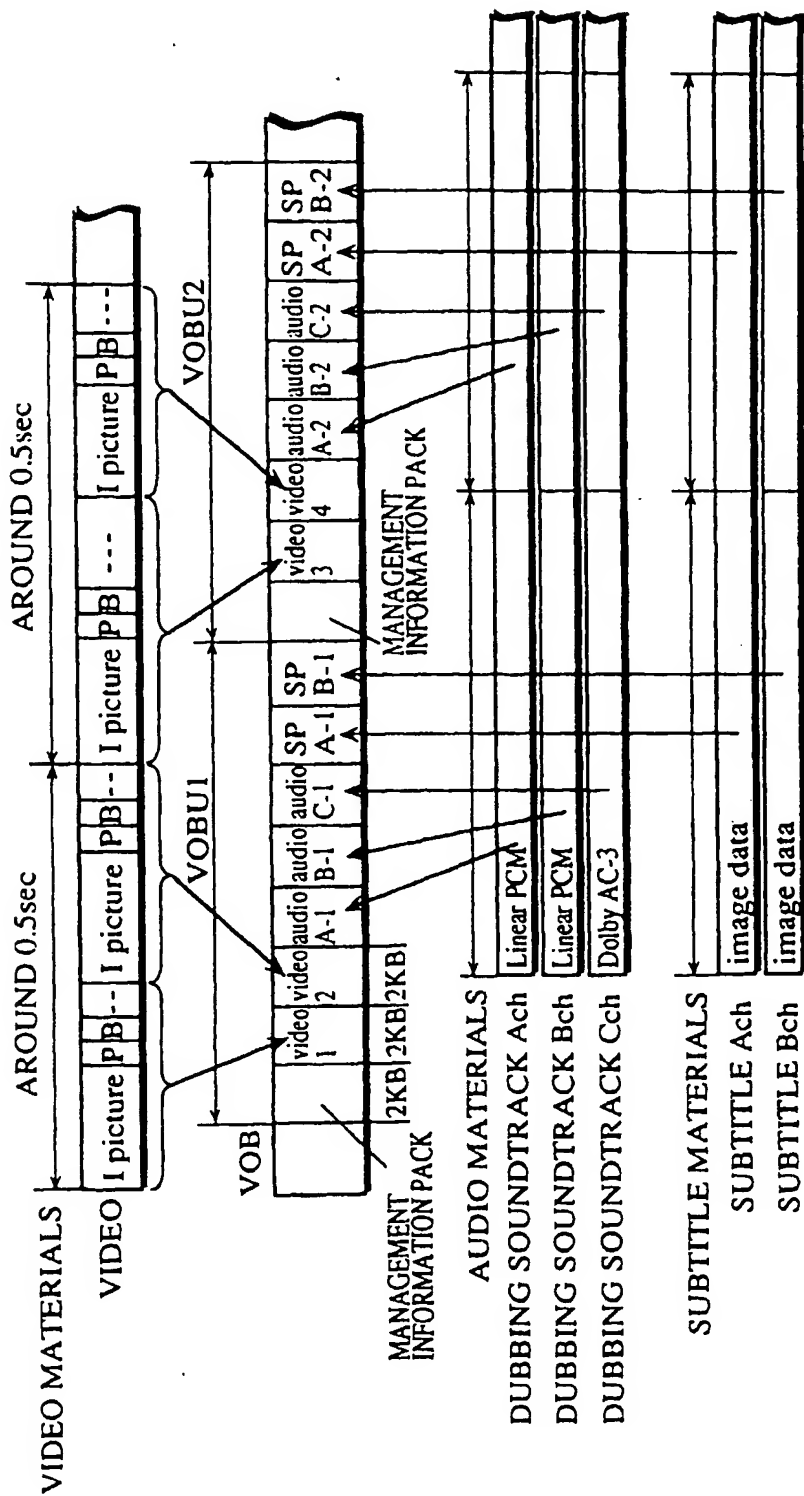

EP 0 836 189 B1

FIG. 7

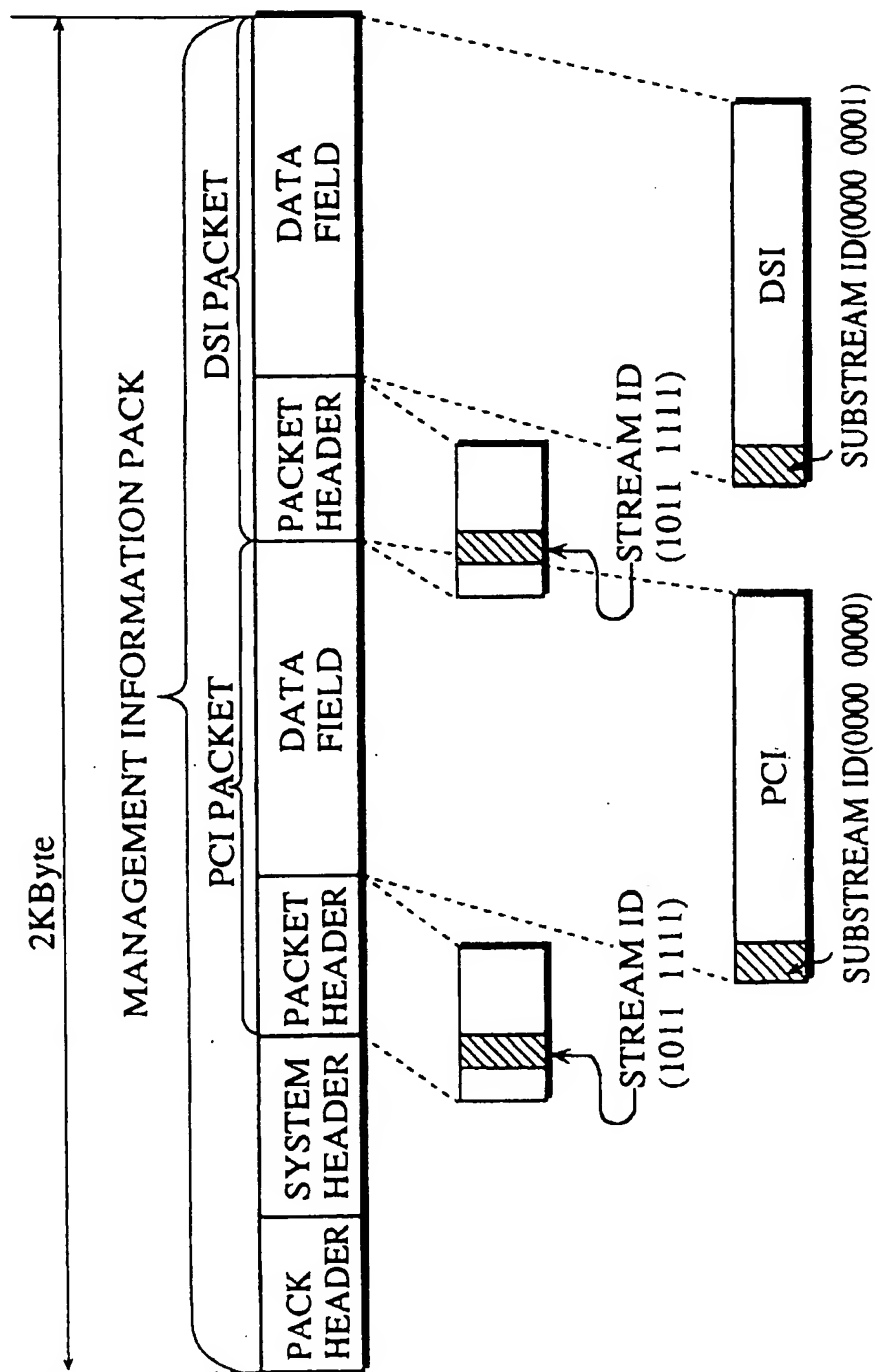

EP 0 836 189 B1

FIG. 8

VTS MANAGEMENT TABLE	
NO. OF TITLE SEARCH POINTERS	
VTS INTERNAL TITLE SEARCH POINTER # 1	VTS INTERNAL TITLE SEARCH POINTER TABLE
VTS INTERNAL TITLE SEARCH POINTER # 2	
VTS INTERNAL TITLE SEARCH POINTER # 3	
VTS INTERNAL TITLE SEARCH POINTER # 4	
VTS INTERNAL TITLE SEARCH POINTER # 5	
⋮	
VTS INTERNAL TITLE SEARCH POINTER # 98	
VTS INTERNAL TITLE SEARCH POINTER # 99	
⋮	
PGC INFORMATION # 1	PGC MANAGEMENT INFORMATION TABLE
PGC INFORMATION # 2	
PGC INFORMATION # 3	
PGC INFORMATION # 4	
PGC INFORMATION # 5	
PGC INFORMATION # 6	
PGC INFORMATION # 7	
PGC INFORMATION # 8	
⋮	
PGC INFORMATION # 98	
PGC INFORMATION # 99	VTS TITLE SET MANAGEMENT INFORMATION
⋮	
VTS TIME SEARCH MAP # 1	
VTS TIME SEARCH MAP # 2	
VTS TIME SEARCH MAP # 3	
VTS TIME SEARCH MAP # 4	
VTS TIME SEARCH MAP # 5	
VTS TIME SEARCH MAP # 6	
VTS TIME SEARCH MAP # 7	
⋮	
VTS TIME SEARCH MAP # 11	
VTS TIME SEARCH MAP # 12	
⋮	

EP 0 836 189 B1

FIG. 9

VIDEO TITLE SET INTERNAL TITLE SEARCH POINTER TABLE

VTS INTERNAL TITLE SEARCH POINTER # 1	VTS # 1. VTS INTERNAL TITLE # 1 . . . . Entry — PGC # 1
VTS INTERNAL TITLE SEARCH POINTER # 2	VTS # 1. VTS INTERNAL TITLE # 2 . . . . Entry — PGC # 2
VTS INTERNAL TITLE SEARCH POINTER # 3	VTS # 1. VTS INTERNAL TITLE # 3 . . . . Entry — PGC # 3
VTS INTERNAL TITLE SEARCH POINTER # 4	VTS # 1. VTS INTERNAL TITLE # 4 . . . . Entry — PGC # 4
VTS INTERNAL TITLE SEARCH POINTER # 5	VTS # 1. VTS INTERNAL TITLE # 5 . . . . Entry — PGC # 5
VTS INTERNAL TITLE SEARCH POINTER # 6	VTS # 1. VTS INTERNAL TITLE # 6 . . . . Entry — PGC # 6

EP 0 836 189 B1

FIG. 10A

PGC INFORMATION #1
PGC LINK INFORMATION NULL
PGC STANDARD INFORMATION NULL
PG MAP
PG1(VOB#1) PG2(VOB#3) PG3(VOB#4)
VOB POSITION INFORMATION TABLE
VOB#1(10min.) VOB#2(50sec.) VOB#3(8min.) VOB#4(48sec.) . . . .
VOB#21(10min.) VOB#22(50sec.) VOB#23(8min.) VOB#24(48sec.) . . . .
VOB#31(10min.) VOB#32(50sec.) VOB#33(8min.) VOB#34(48sec.)
PGC COMMAND TABLE NULL
PGC INFORMATION #2
PGC LINK INFORMATION PGC#13
PGC STANDARD INFORMATION NULL
PG MAP NULL
VOB POSITION INFORMATION TABLE
VOB#1(10min.) VOB#2(5min.) VOB#3(8min.)
PGC COMMAND TABLE NULL
PGC INFORMATION #3
PGC LINK INFORMATION NULL
PGC STANDARD INFORMATION 5Loop Random
PG MAP NULL
VOB POSITION INFORMATION TABLE
VOB#1(10min.) VOB#62(5min.) VOB#3(30sec.) VOB#64(8min.) . . . .
VOB#5(18min.) VOB#72(5min.) VOB#4(30sec.) VOB#74(8min.) . . . .
PGC COMMAND TABLE NULL
PGC INFORMATION #4
PGC LINK INFORMATION NULL
PGC STANDARD INFORMATION 3Loop
PG MAP NULL
VOB POSITION INFORMATION TABLE
VOB#1(10min.) VOB#51(5min.) VOB#2(30sec.) VOB#52(8min.) . . . .
VOB#5(18min.) VOB#55(5min.) VOB#6(30sec.) VOB#56(8min.)
PGC COMMAND TABLE NULL
PGC INFORMATION #5
PGC LINK INFORMATION NULL
PGC STANDARD INFORMATION NULL
PG MAP NULL
VOB POSITION INFORMATION TABLE
VOB#6(10min.) VOB#8(5min.) VOB#16(8min.) VOB#15(5min.) VOB#16(8min.)
PGC COMMAND TABLE
CmpRegLink R1,3. "=" ,PGC#15
CmpRegLink R1,4. "=" ,PGC#16
PGC INFORMATION #6
PGC LINK INFORMATION NULL
PGC STANDARD INFORMATION NULL
PGC MAP NULL
VOB POSITION INFORMATION TABLE
VOB#17(50sec.) VOB#18(5min.) VOB#19(8min.)
PGC COMMAND TABLE TitlePlay Title#5

a10

FIG. 10B

PGC INFORMATION

PGC LINK INFORMATION
PGC STANDARD INFORMATION
PG MAP
VOB POSITION INFORMATION TABLE
PGC COMMAND TABLE

FIG. 10C

VOB POSITION INFORMATION TABLE

REPRODUCTION TIME OF VOB # 1	OFFSET FOR VOB # 1	NO. OF BLOCKS FORMING VOB # 1
REPRODUCTION TIME OF VOB # 2	OFFSET FOR VOB # 2	NO. OF BLOCKS FORMING VOB # 2
REPRODUCTION TIME OF VOB # 3	OFFSET FOR VOB # 3	NO. OF BLOCKS FORMING VOB # 3
REPRODUCTION TIME OF VOB # 4	OFFSET FOR VOB # 4	NO. OF BLOCKS FORMING VOB # 4
REPRODUCTION TIME OF VOB # 5	OFFSET FOR VOB # 5	NO. OF BLOCKS FORMING VOB # 5
REPRODUCTION TIME OF VOB # 6	OFFSET FOR VOB # 6	NO. OF BLOCKS FORMING VOB # 6
REPRODUCTION TIME OF VOB # 7	OFFSET FOR VOB # 7	NO. OF BLOCKS FORMING VOB # 7
REPRODUCTION TIME OF VOB # 8	OFFSET FOR VOB # 8	NO. OF BLOCKS FORMING VOB # 8
	:	

EP 0 836 189 B1

FIG. 11


(Video\_Manager)

VM MANAGEMENT TABLE
VM INTERNAL TITLE SEARCH POINTER TABLE
NO. OF TITLE SEARCH POINTERS
VM INTERNAL TITLE SEARCH POINTER # 1
VM INTERNAL TITLE SEARCH POINTER # 2
VM INTERNAL TITLE SEARCH POINTER # 3
VM INTERNAL TITLE SEARCH POINTER # 4
VM INTERNAL TITLE SEARCH POINTER # 5
VM INTERNAL TITLE SEARCH POINTER # 6
VM INTERNAL TITLE SEARCH POINTER # 7
VM INTERNAL TITLE SEARCH POINTER # 8
:
VM INTERNAL TITLE SEARCH POINTER # 98
VM INTERNAL TITLE SEARCH POINTER # 99
PGC INFORMATION # 1_For_Menu
PGC LINK INFORMATION PGC# 1
PGC STANDARD INFORMATION NULL
PG MAP NULL
VOB POSITION INFORMATION TABLE VOB# 1_For_Menu
PGC COMMAND TABLE NULL
VOB# 1_For_Menu
MANAGEMENT INFORMATION PACK(PLURALITY OF TitlePlay)
SUB-PICTURE(CHARACTER STRINGS FOR TITLE NAMES)
MAIN IMAGE(BACKGROUND IMAGE)



EP 0 836 189 B1

FIG. 12

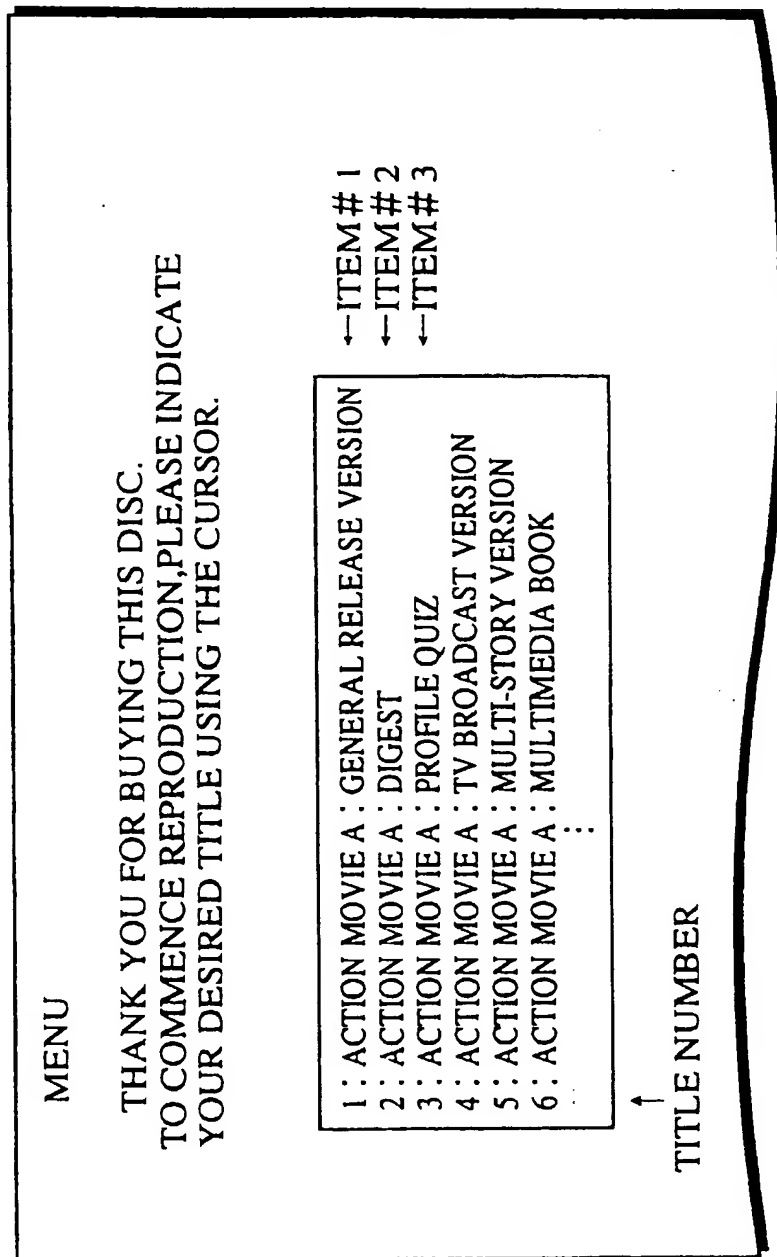

EP 0 836 189 B1

FIG. 13

## MANAGEMENT INFORMATION PACK · HIGHLIGHT INFORMATION

ITEM INFORMATION # 1	PALETTE CONVERSION RANGE
	Title Play Title # 1
ITEM INFORMATION # 2	PALETTE CONVERSION RANGE
	Title Play Title # 2
ITEM INFORMATION # 3	PALETTE CONVERSION RANGE
	Title Play Title # 3
ITEM INFORMATION # 4	PALETTE CONVERSION RANGE
	Title Play Title # 4
ITEM INFORMATION # 5	PALETTE CONVERSION RANGE
	Title Play Title # 5
ITEM INFORMATION # 6	PALETTE CONVERSION RANGE
	Title Play Title # 6


EP 0 836 189 B1

FIG. 14

VIDEO MANAGER INTERNAL TITLE SEARCH POINTER TABLE


	TITLE PLAYBACK TYPE			TITLE SET NUMBER		VTS INTERNAL TITLE NUMBER	
	al41	al42	al43	NO BRANCH BETWEEN TITLES FLAG	TITLE SET NUMBER	TITLE SET NUMBER	TITLE SET NUMBER
	SEQUENTIAL SINGLE PGC IDENTIFICATION FLAG	NO BRANCH FLAG	NO BRANCH BETWEEN TITLES FLAG				
TITLE SEARCH POINTER # 1	ON	ON	ON	ON	TitleSet # 1	TitleSet # 1	Title # 1
TITLE SEARCH POINTER # 2	OFF	OFF	ON	ON	TitleSet # 1	TitleSet # 1	Title # 2
TITLE SEARCH POINTER # 3	OFF	OFF	ON	ON	TitleSet # 1	TitleSet # 1	Title # 3
TITLE SEARCH POINTER # 4	OFF	OFF	OFF	OFF	TitleSet # 1	TitleSet # 1	Title # 4
TITLE SEARCH POINTER # 5	OFF	OFF	ON	ON	TitleSet # 1	TitleSet # 1	Title # 5
TITLE SEARCH POINTER # 6	OFF	OFF	OFF	OFF	TitleSet # 1	TitleSet # 1	Title # 6
TITLE SEARCH POINTER # 7	OFF	OFF	ON	ON	TitleSet # 2	TitleSet # 2	Title # 1
TITLE SEARCH POINTER # 8	OFF	OFF	ON	ON	TitleSet # 2	TitleSet # 2	Title # 2
TITLE SEARCH POINTER # 9	OFF	OFF	ON	ON	TitleSet # 2	TitleSet # 2	Title # 3

EP 0 836 189 B1

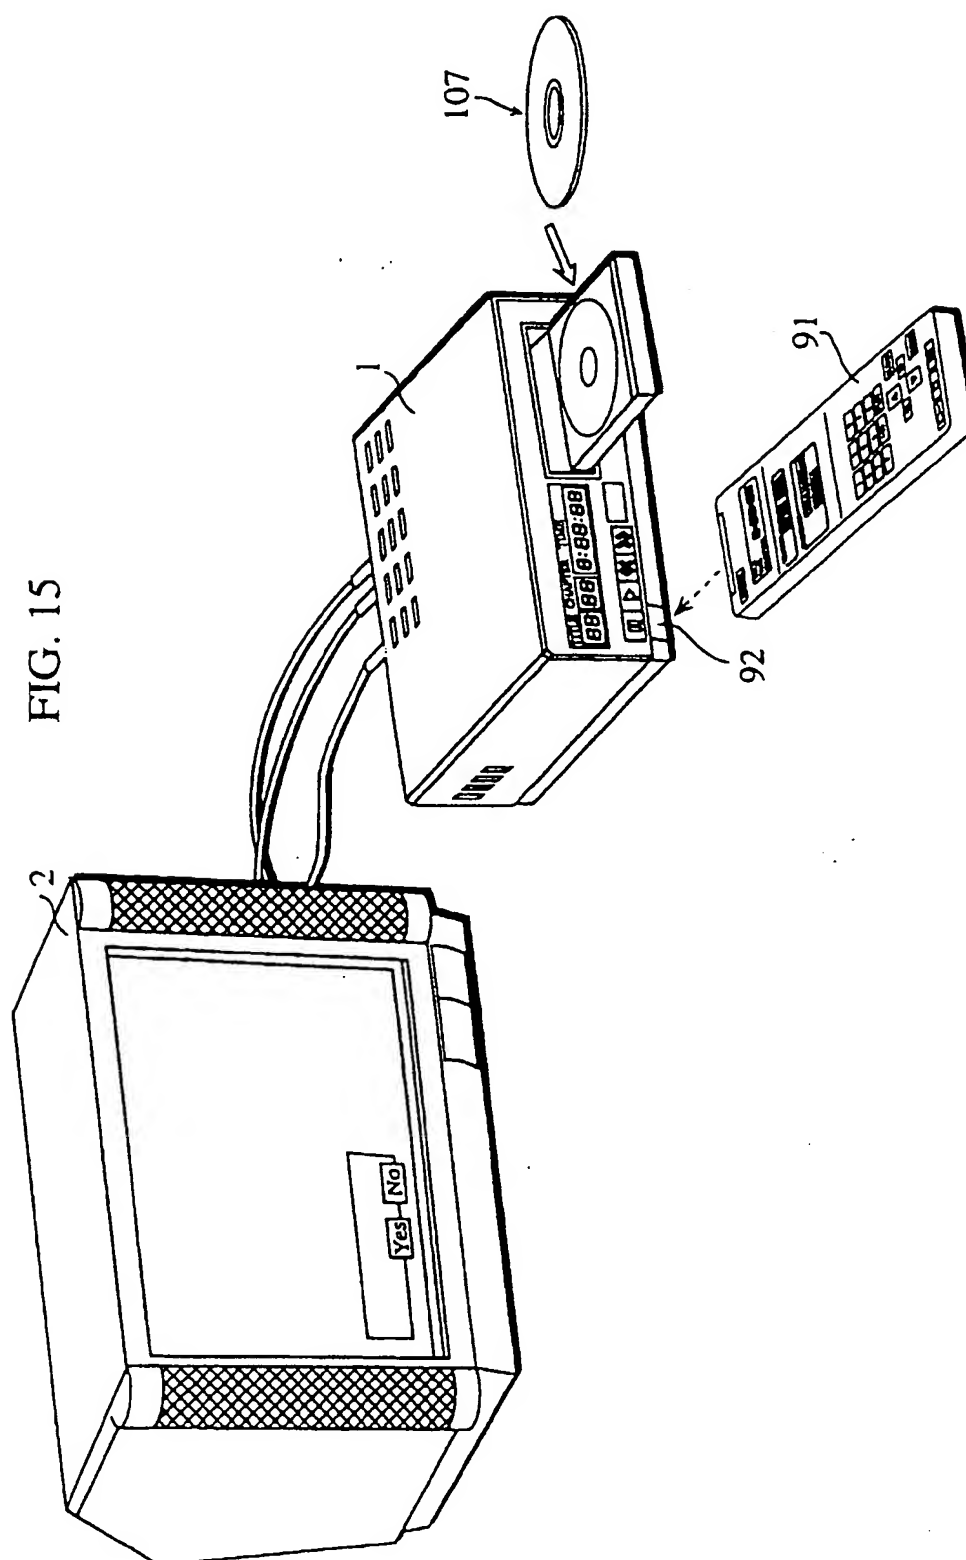

EP 0 836 189 B1

FIG. 16

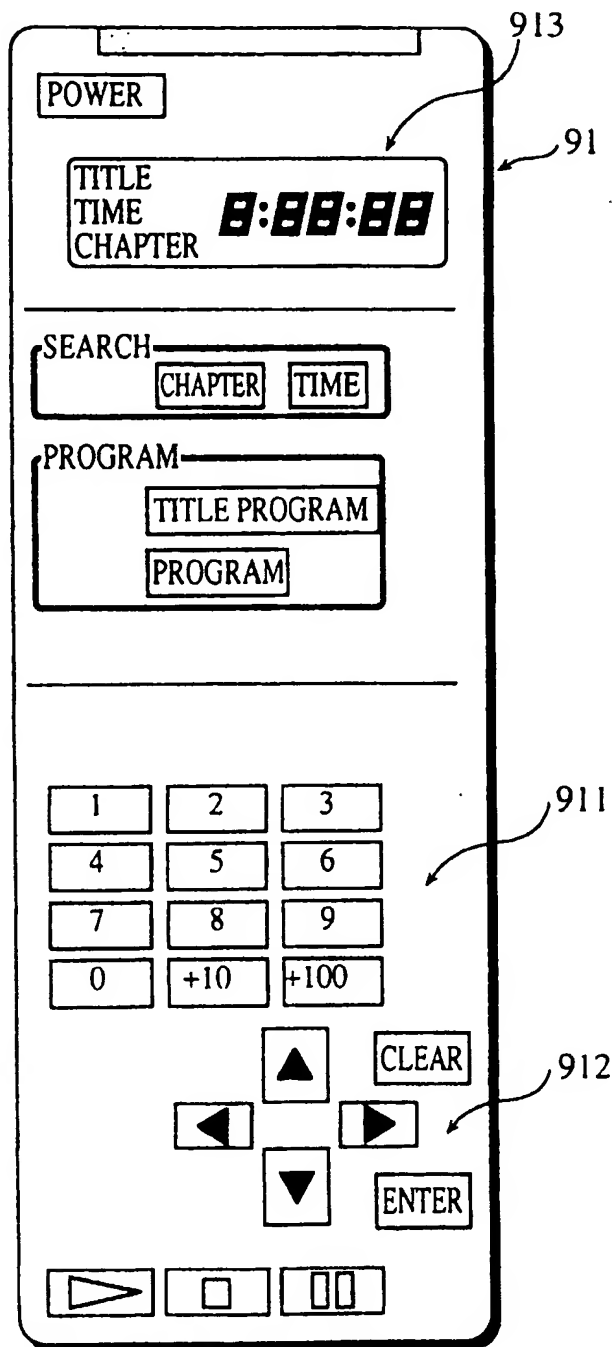

EP 0 836 189 B1

FIG. 17



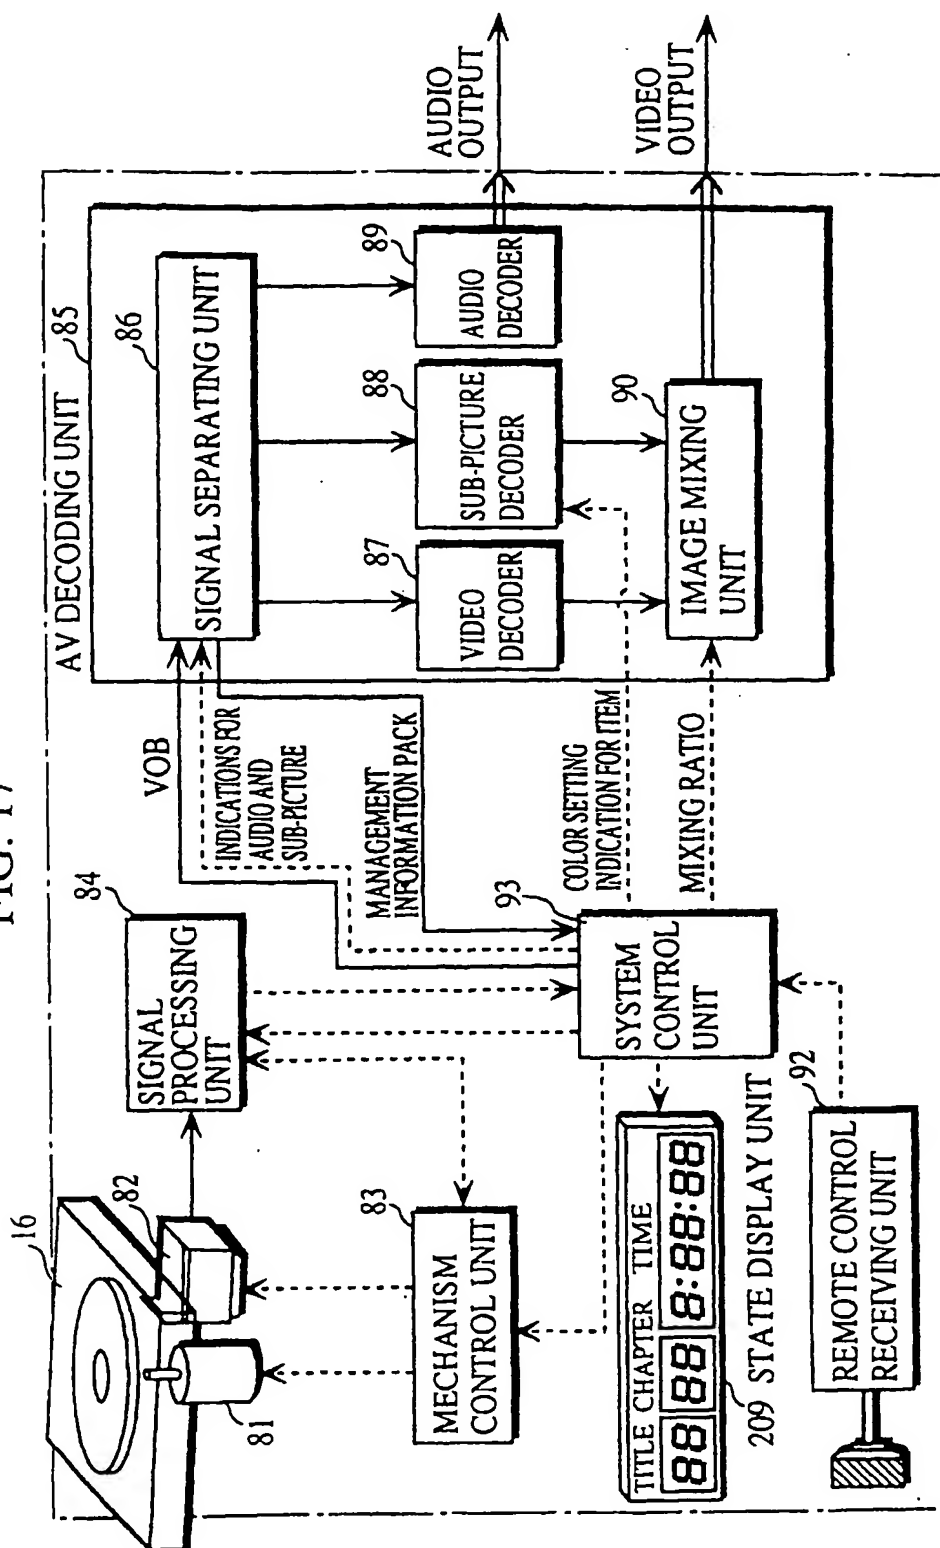


FIG. 18



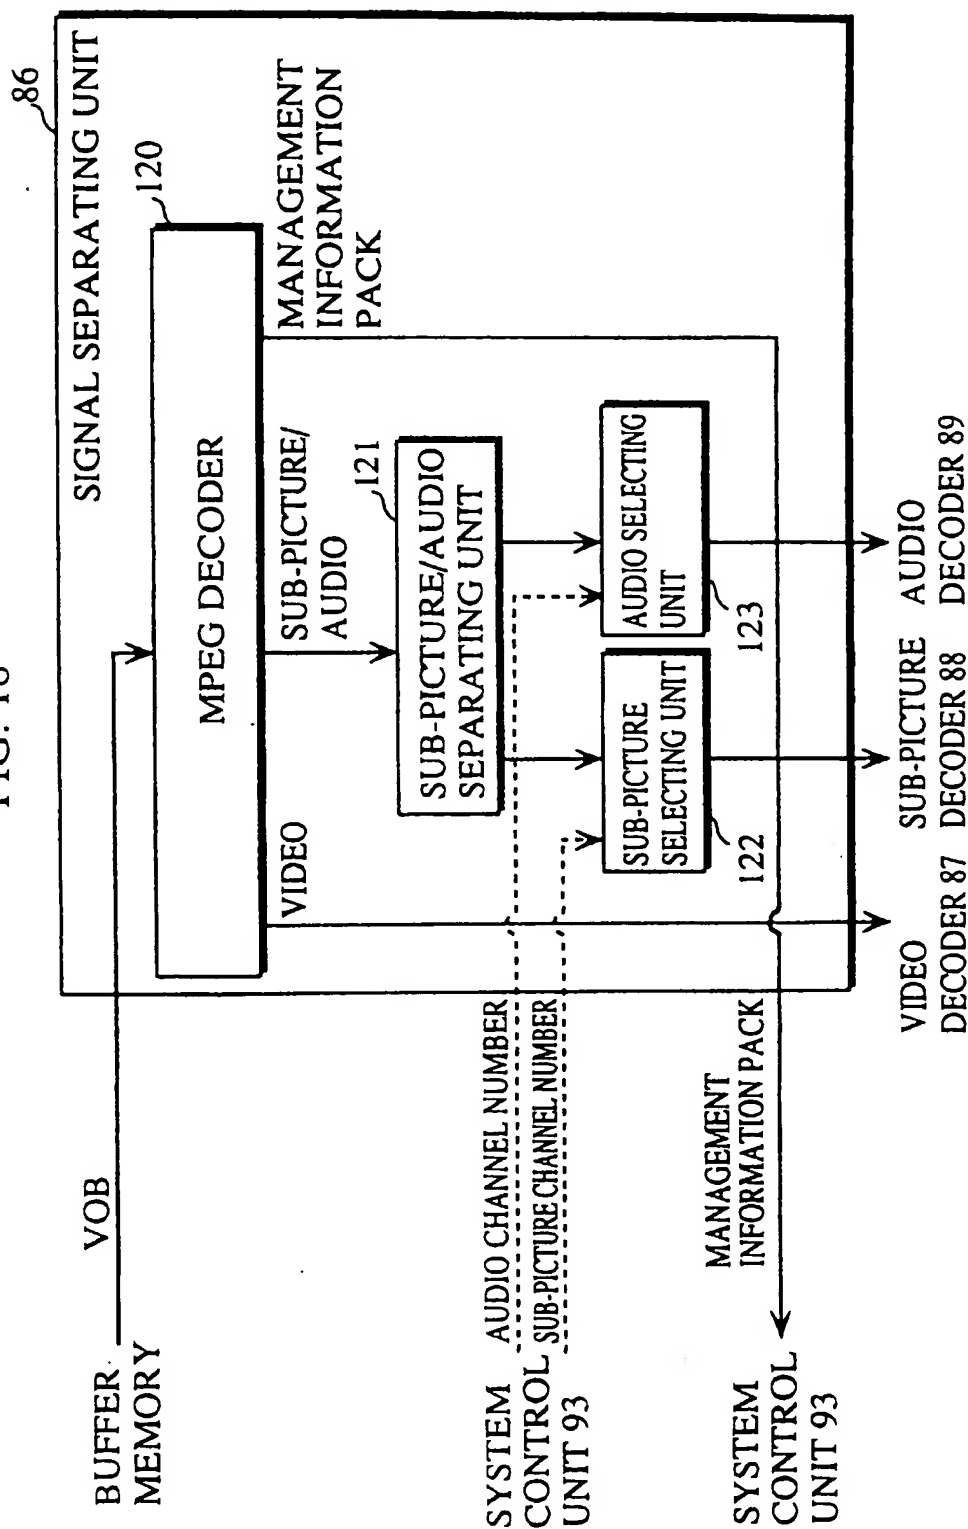

EP 0 836 189 B1

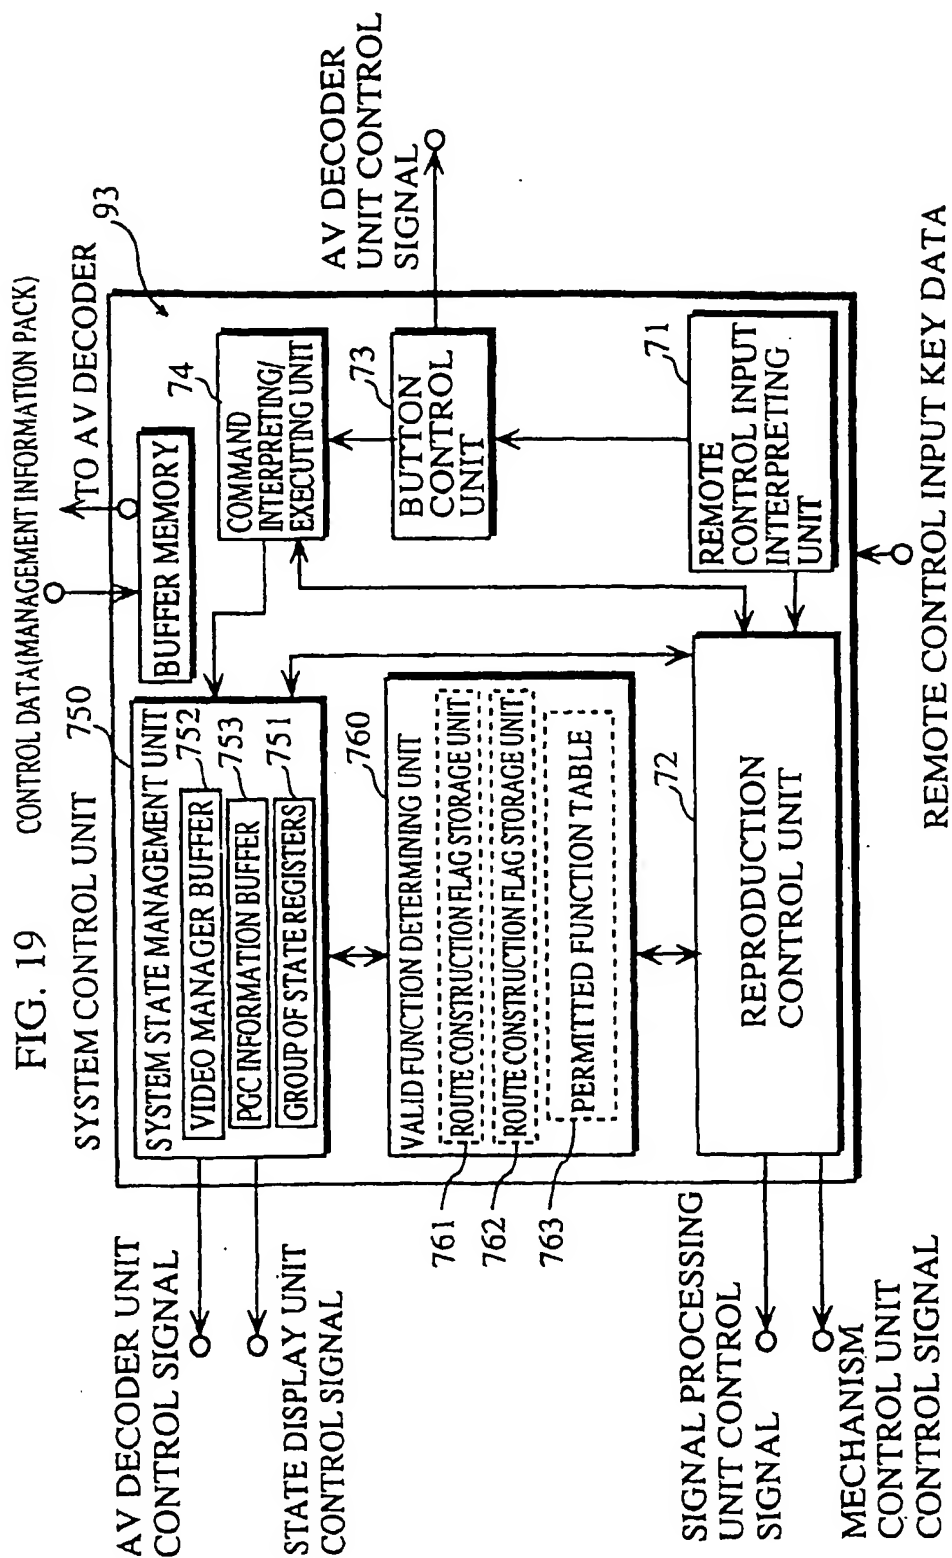


EP 0 836 189 B1

FIG. 20

FUNCTION	PERMISSION CONDITION		
	SEQUENTIAL SINGLE PGC FLAG	NO BRANCH FLAG	NO BRANCH BETWEEN TITLES FLAG
CHAPTER NUMBER DISPLAY	ON	ON	—
REPRODUCTION PROGRESSION TIME DISPLAY	ON	ON	—
CHAPTER NUMBER SEARCH	ON	ON	—
TIME SEARCH	ON	ON	—
CHAPTER PROGRAMMING FUNCTION	ON	ON	—
TITLE PROGRAMMING FUNCTION	ON	—	ON


EP 0 836 189 B1

FIG. 21A

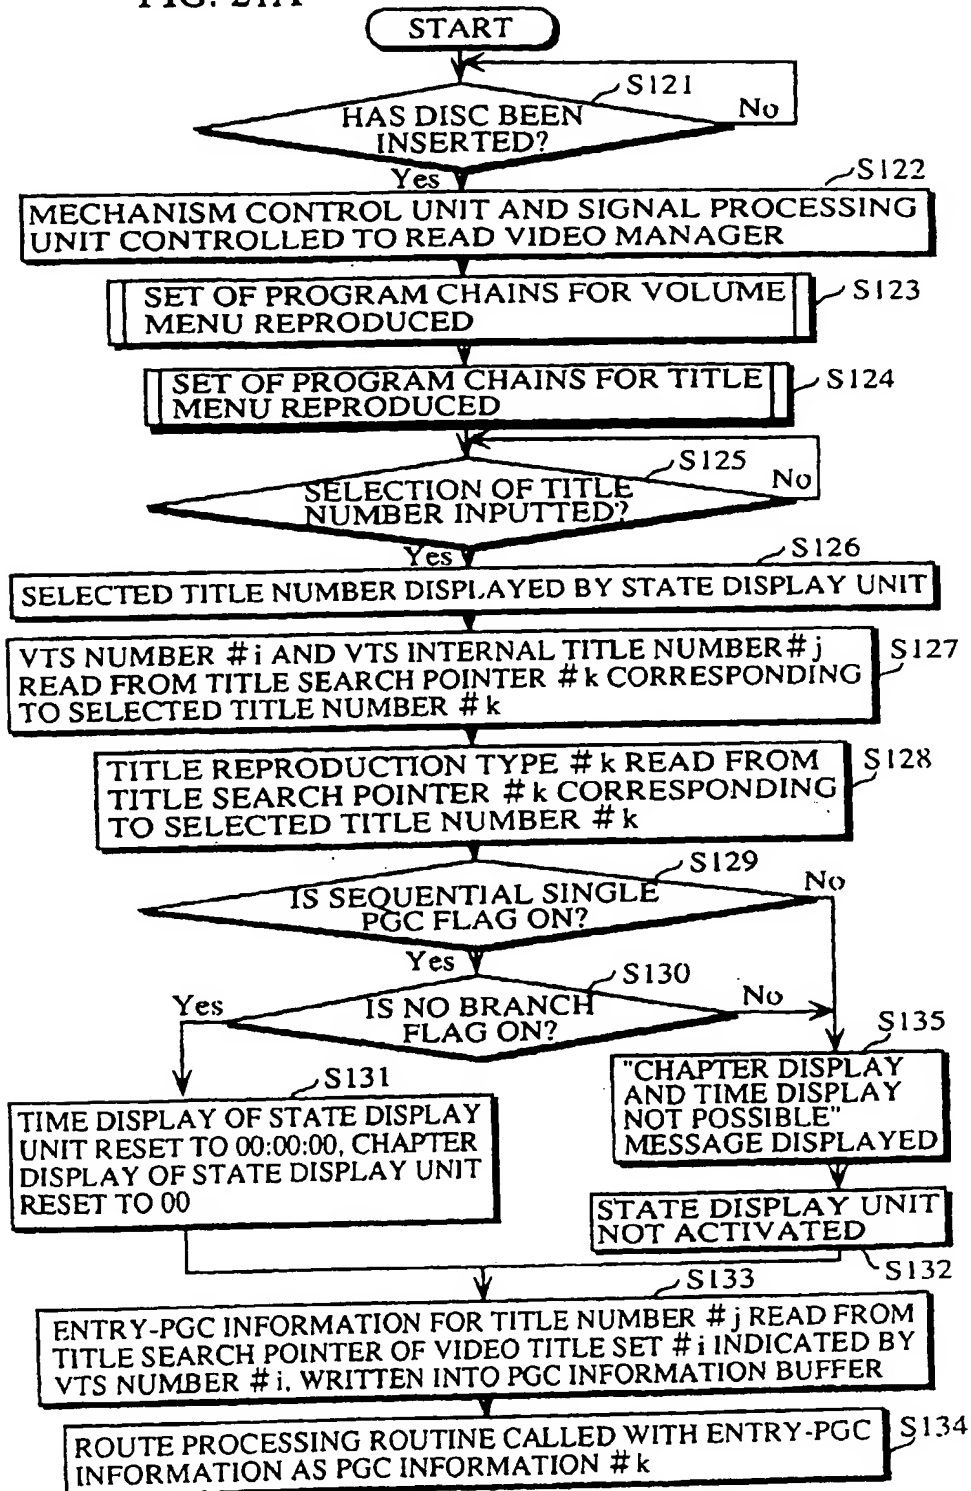

EP 0 836 189 B1

FIG. 21B

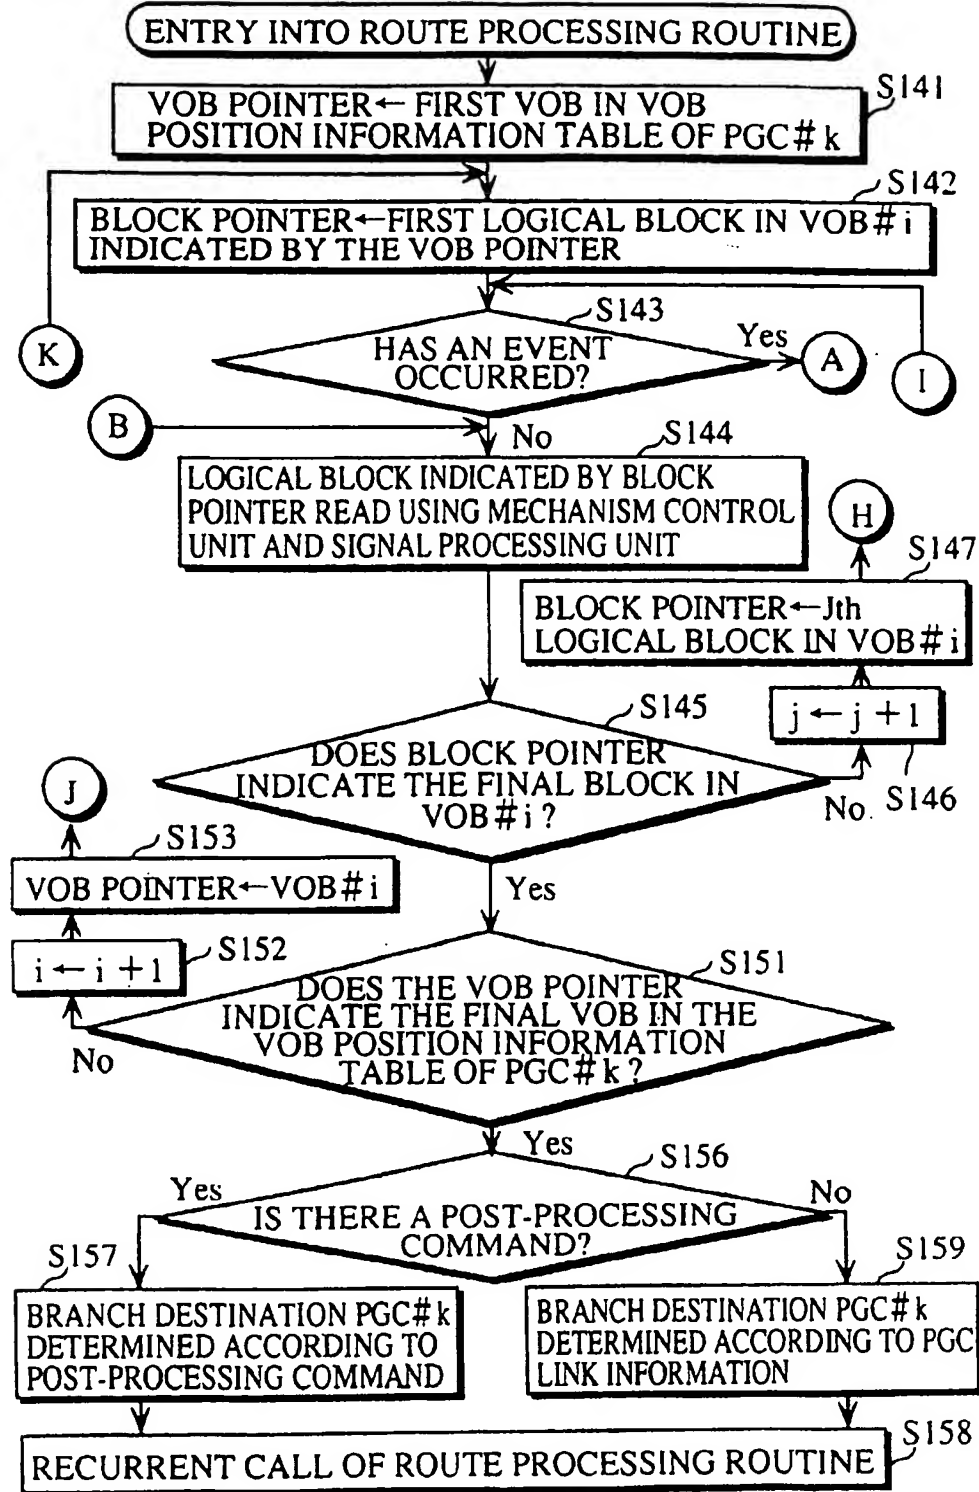

EP 0 836 189 B1

FIG. 21C



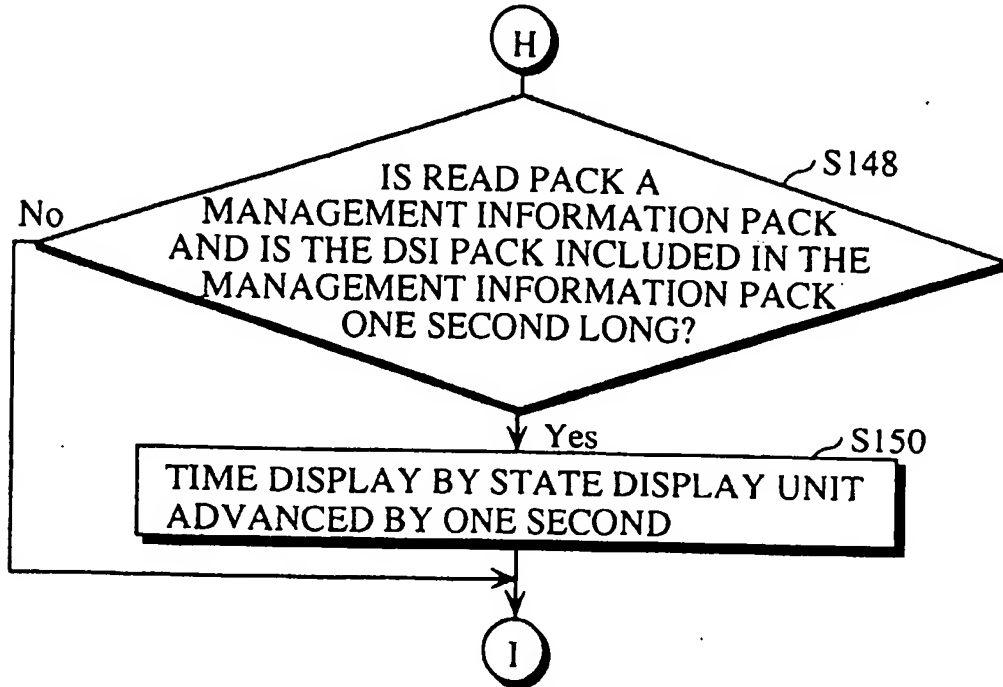


FIG. 21D

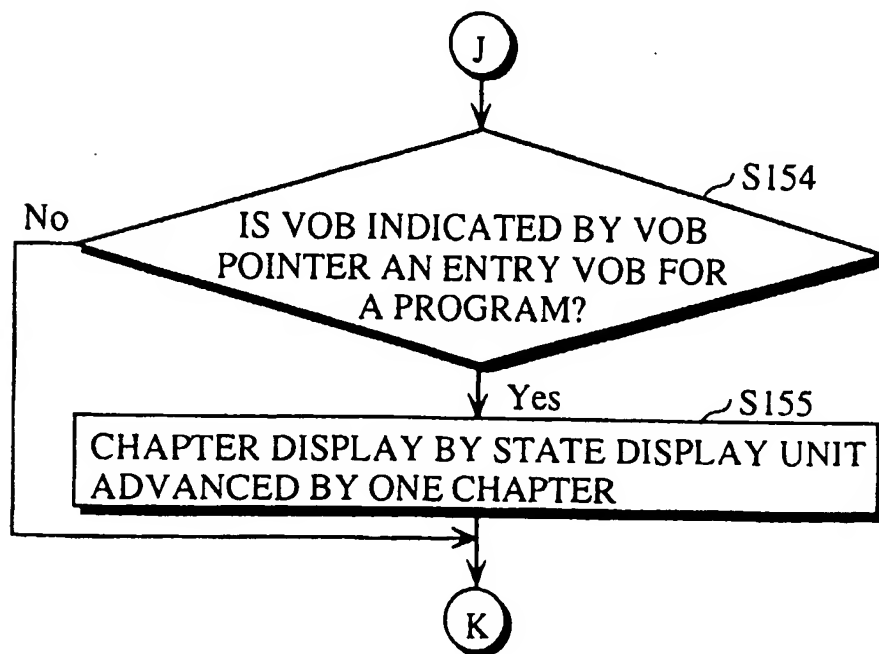


EP 0 836 189 B1

FIG. 22A

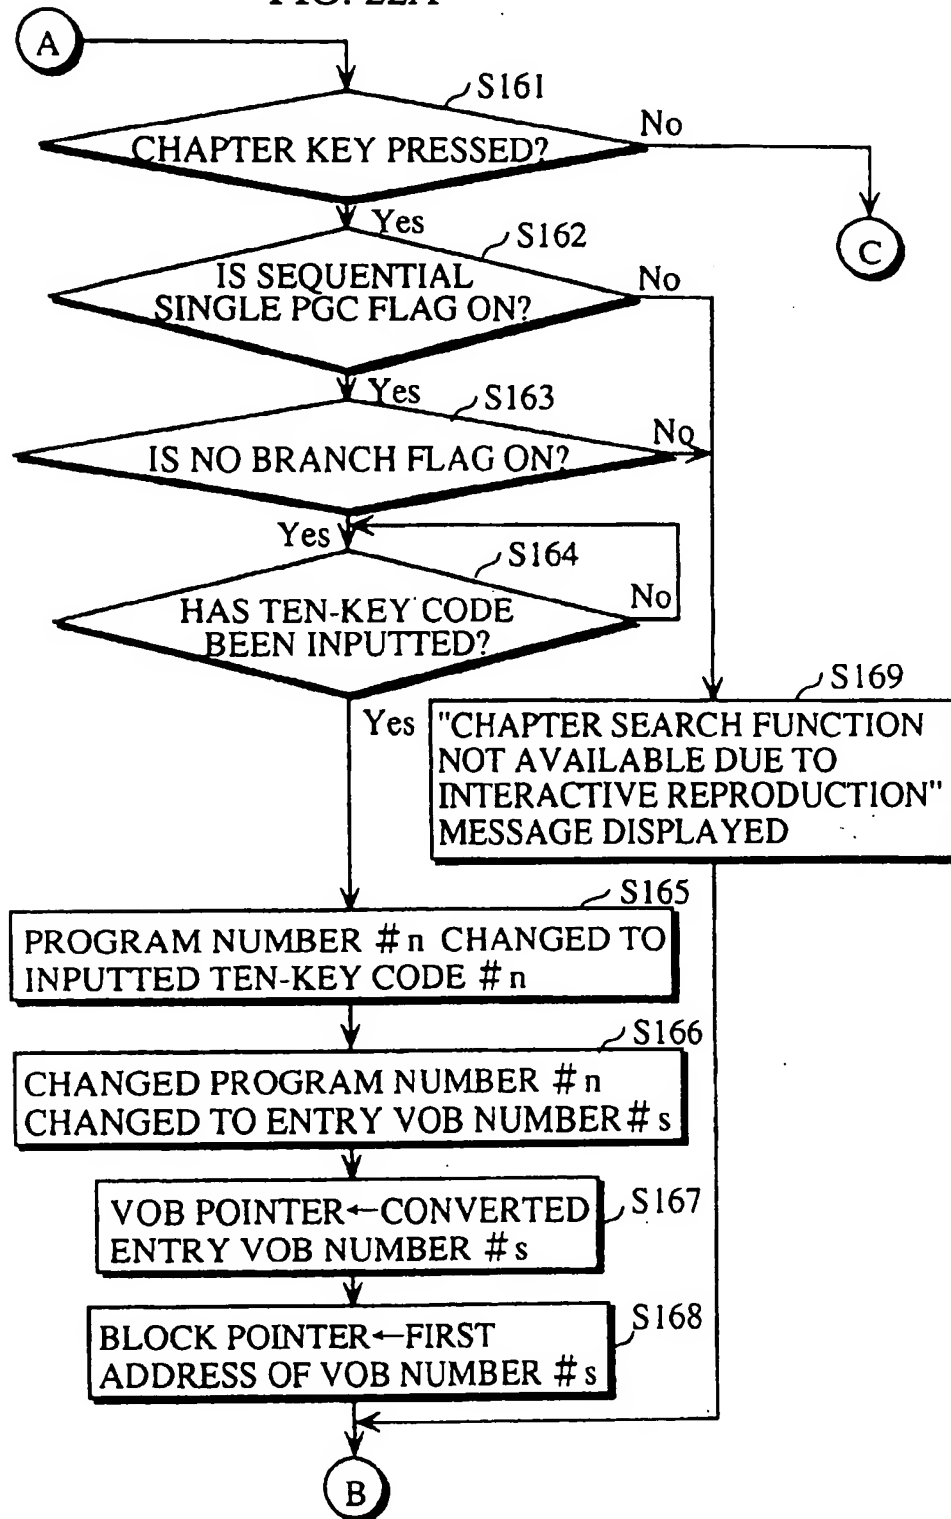

EP 0 836 189 B1


FIG. 22B

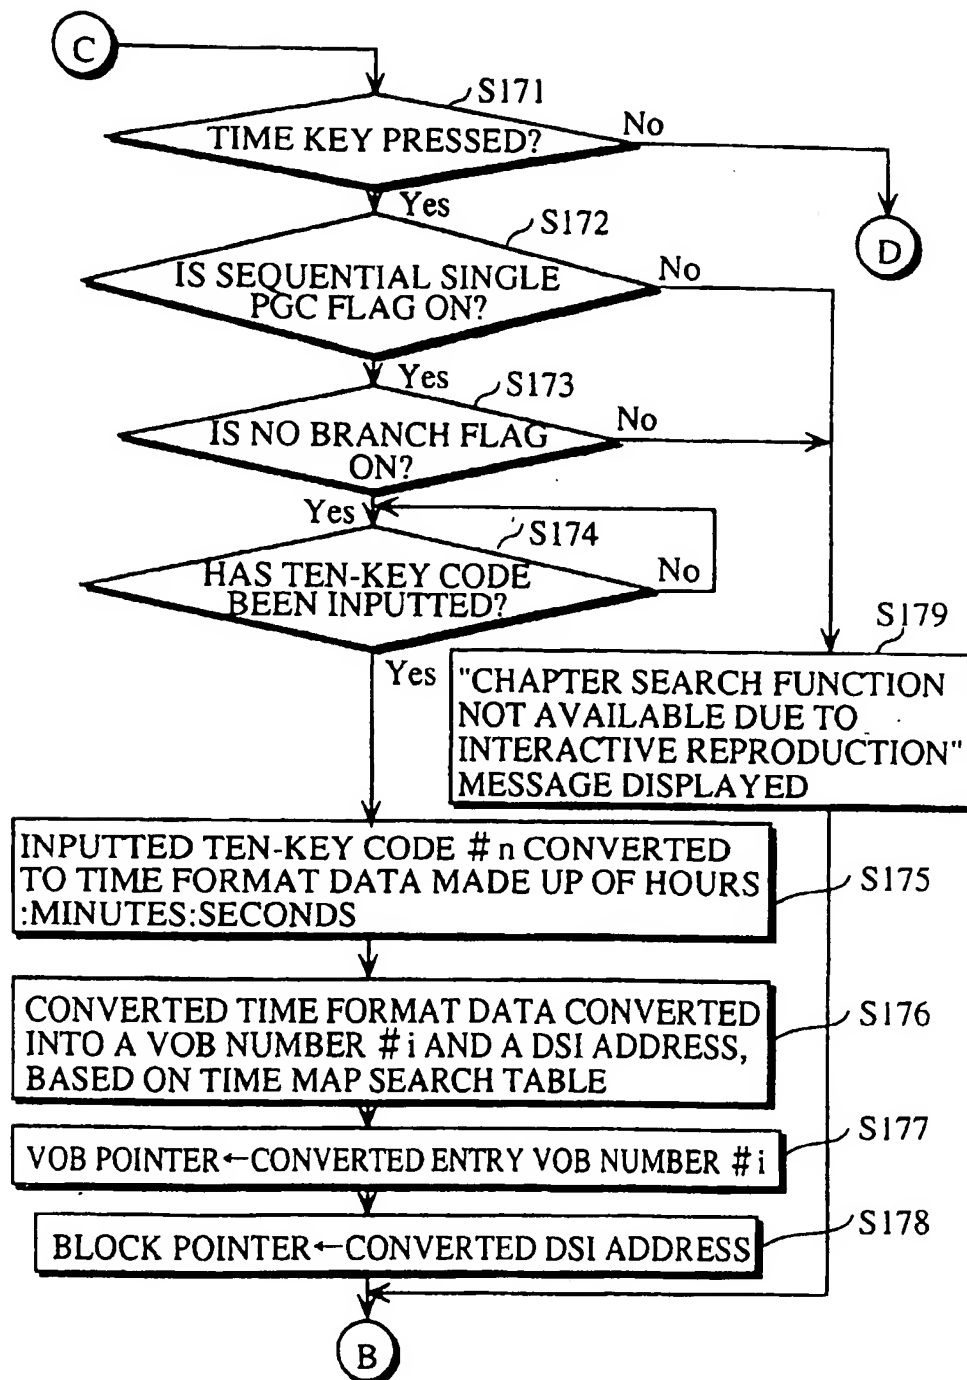




EP 0 836 189 B1

FIG. 22C

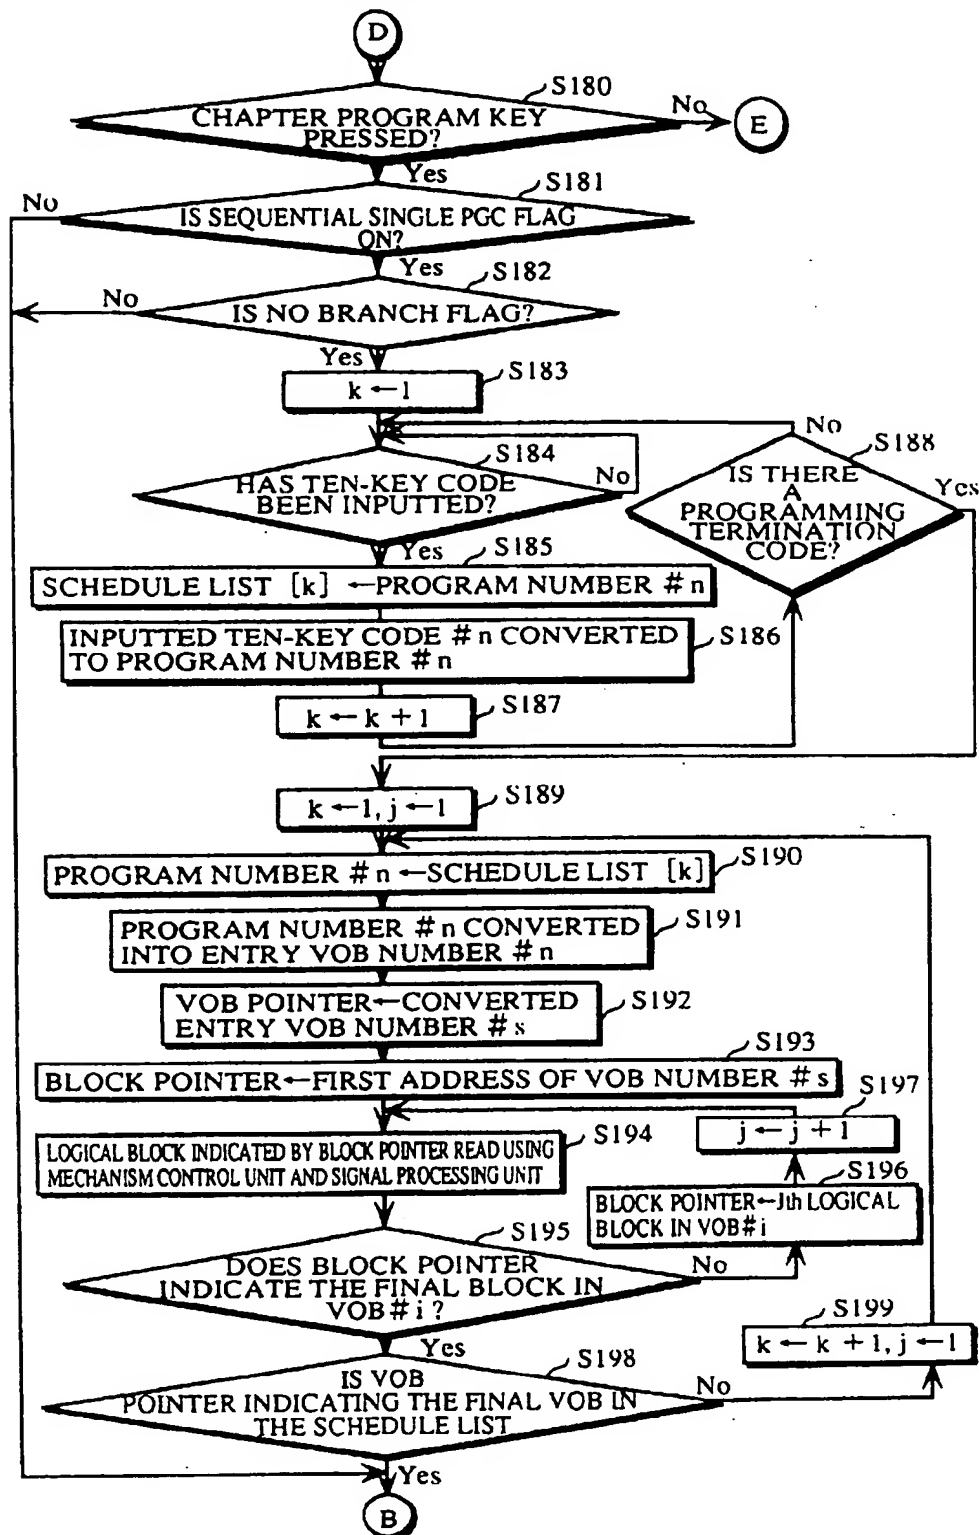

EP 0 836 189 B1

FIG. 22D

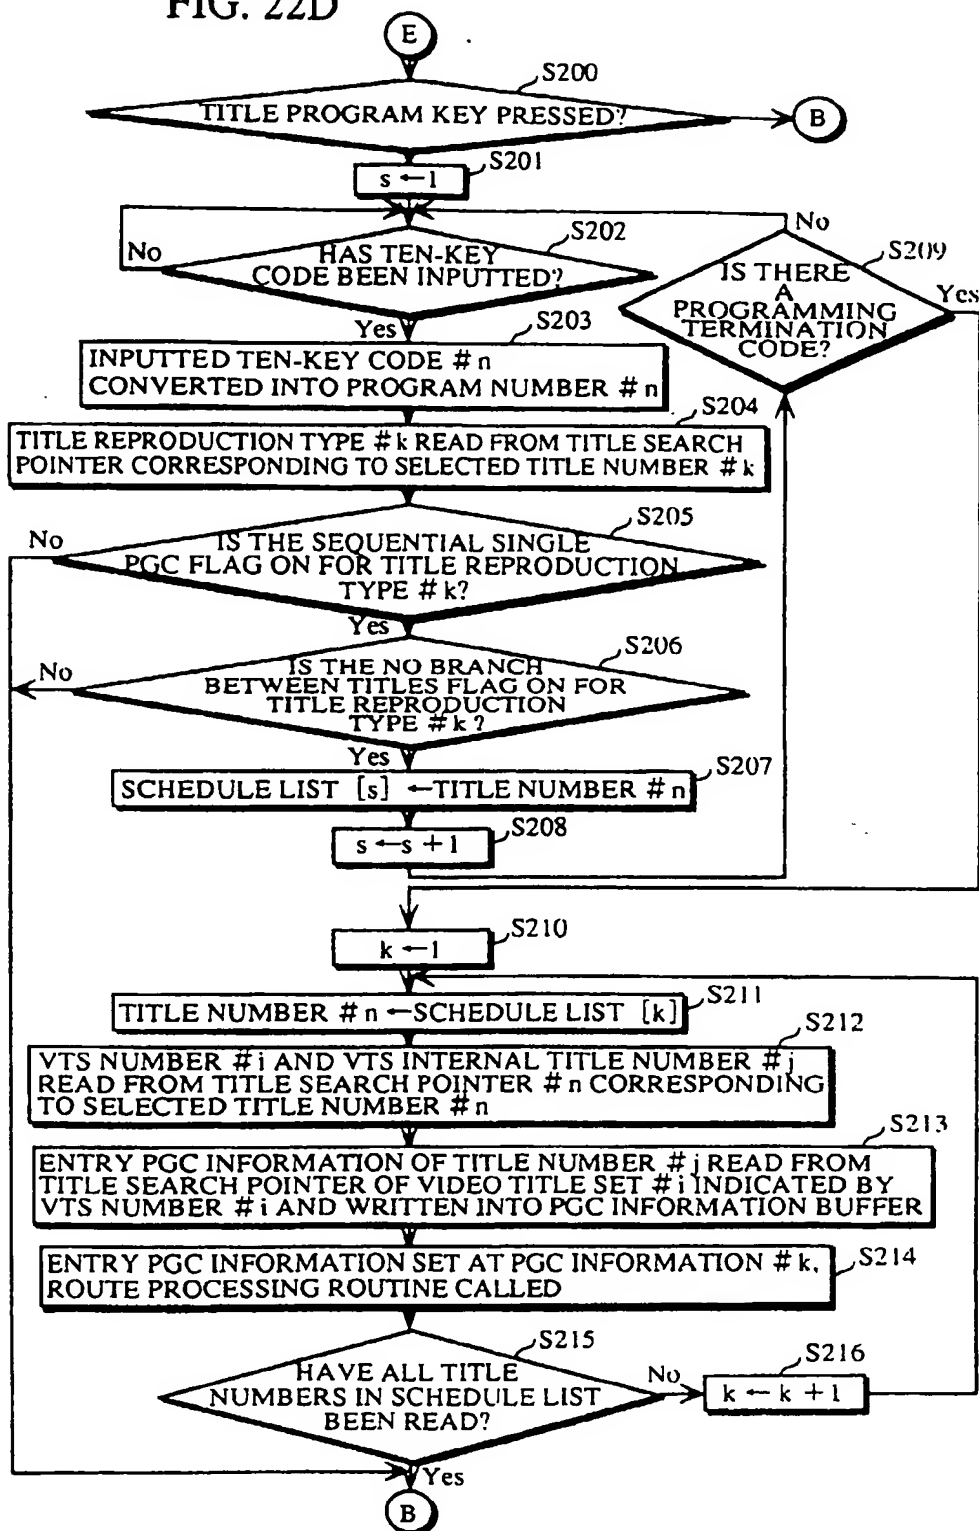

EP 0 836 189 B1

FIG. 23

88

FIRST FLAG	SECOND FLAG	THIRD FLAG	FOURTH FLAG
↓	↓	↓	↓
SINGLE ROUTE INFORMATION	NO LOOP INFORMATION	NO AUTOMATIC BRANCH	NO INTERACTIVE BRANCH
ON	OFF	OFF	OFF